

HER

Collection

HER Collection

HER

HISTORY

Since our beginning, we have become a reference in the creation of technical and architectural lighting solutions. Years of experience and dedication; quality and innovation; are translated into the confidence of architects, designers, professionals and clients.

LIGHTING WITH INNOVATION AND DESIGN

Her lighting is much more than a lighting manufacturer. Our mission is to create innovative lighting experiences that bring comfort and value to projects. Headquartered in Barcelona, our work reflects the dynamic and constantly evolving nature of today's lighting.

CREATING EXPERIENCES

At Her lighting we believe that lighting is an opportunity to enhance spaces and in this way create environments that inspire, promote well-being and boost productivity, thus improving the daily lives of the people who inhabit and live in them. Our passion for light and our constant search for excellence is reflected in our lighting solutions and projects.

HER LAB

At the heart of our factory is Her Lab, our department dedicated to research and development. A team of enthusiastic and passionate engineers, designers and lighting professionals. Her Lab is constantly developing, exploring and researching new technologies; focused on providing innovative lighting solutions.

SHOWROOM

A unique space dedicated to lighting, designed to inspire and offer our customers the opportunity to experience our luminaires and discover the infinite and unique lighting solutions we provide for their projects.

COMMITMENT

Our commitment to light is a fundamental principle that guides us; in the process of creating, designing and manufacturing our luminaires; in our collaboration with professionals, architects and designers; and in the promotion of ethical and responsible consumption. At Her Lighting we strive to create functional and timeless designs that enrich lives and spaces.

HISTORIA

Desde nuestro comienzo, nos hemos convertido en un referente en la creación de soluciones técnicas y arquitectónicas de iluminación. Años de experiencia y dedicación; calidad e innovación; se traducen en confianza de arquitectos, diseñadores, profesionales y clientes.

ILUMINANDO CON INNOVACIÓN Y DISEÑO

Her lighting es mucho más que un fabricante de iluminación. Nuestro objetivo es crear experiencias lumínicas innovadoras, que aporten confort y valor a los proyectos. Ubicados en Barcelona, nuestro hacer refleja la naturaleza dinámica y en constante evolución de la iluminación actual.

CREANDO EXPERIENCIAS

En Her lighting creemos que la iluminación es una oportunidad para enriquecer los espacios y de esta manera crear entornos que inspiren, promuevan el bienestar, impulsen la productividad, mejorando de esta manera el día a día de las personas que lo habitan y lo viven. Nuestra pasión por la luz y nuestra constante búsqueda de la excelencia, se refleja en nuestras soluciones y proyectos de iluminación.

HER LAB

En el corazón de nuestra fábrica se encuentra Her Lab, nuestro departamento dedicado a la investigación y el desarrollo. Un equipo formado por ingenieros, diseñadores y profesionales de la iluminación, entusiastas y apasionados. Her Lab está en constante desarrollo, explorando e investigando nuevas tecnologías; enfocados en brindar soluciones lumínicas innovadoras.

SHOWROOM

Un espacio único dedicado a la iluminación, pensado para inspirar y ofrecer a nuestros clientes la oportunidad de experimentar nuestras luminarias y descubrir las infinitas y singulares soluciones lumínicas que aportamos para sus proyectos.

COMPROMISO

Nuestro compromiso con luz es un principio fundamental que nos guía; en el proceso de creación, diseño y fabricación de nuestras luminarias; en nuestra colaboración con profesionales, arquitectos y diseñadores; y en la promoción del consumo ético y responsable. En Her Lighting nos esforzamos por crear diseños funcionales y atemporales que enriquezcan vidas y espacios.

 herlighting.com

 [instagram.com/herlighting](https://www.instagram.com/herlighting)

 [linkedin.com/company/herlighting](https://www.linkedin.com/company/herlighting)

 [youtube.com/@HerLighting](https://www.youtube.com/@HerLighting)



Fredrik Eng

After working more than 20 years with project specific architectural lighting, the need for new bespoke solutions is there all the time. When we team up with architects to create light concepts it is crucial to be able to work with an unlimited toolbox.

The product is just a mean to achieve the best result in a project.

Sometimes it is to match the right color or material, having the right lens for the right effect, or be able to control it in a specific way. Other times it demands a total new design. HER lighting with its R&D department has helped us realize many projects throughout the last 10 years. The PM collection was born out of a need for a visually clean and flexible front ring that could hold and hide the technical light engine.

Out of this idea a whole series of fixtures was designed.

eng

Después de trabajar más de 20 años con iluminación arquitectónica específica para proyectos, la necesidad de nuevas soluciones continúa siendo una necesidad. Cuando colaboramos con arquitectos para crear conceptos de iluminación, es fundamental poder trabajar con una caja de herramientas ilimitada. El producto es solo un medio para lograr el mejor resultado en un proyecto.

A veces se trata de acertar el color o el material, tener la lente adecuada para el efecto deseado o poder controlar la luz de una manera específica. Otras veces, se requiere un diseño totalmente nuevo. HER Lighting, con su departamento de I+D, nos ha ayudado a realizar muchos proyectos a lo largo de los últimos 10 años. La colección PM nació de la necesidad de un aro frontal visualmente limpio y flexible que pudiera contener y ocultar el conjunto técnico de iluminación. A partir de este concepto diseñamos toda una serie de luminarias.



Bruno de Avila

Bruno de Avila is an award-winning product designer with over 15 years experience in the lighting world. Now he focuses on special projects for HER Lighting with his innovative approach to design. Based in Barcelona, the Brazilian designer combines artistry with innovation to transform concepts into captivating lighting.

He designed his first award-winning lamp while studying for his bachelor's degree in design, marking the beginning of a distinguished career. Using advanced 3D printing and CNC milling techniques, he ensures precision and functionality in each creation.

Bruno combines design methodology, craftsmanship and high technology, always searching for more sustainable solutions.

B. Avila

Bruno de Avila es un galardonado diseñador de producto con más de 15 años de experiencia en el mundo de la iluminación. Ahora está centrado en proyectos especiales para HER Lighting con su innovador enfoque del diseño. Afincado en Barcelona, el diseñador brasileño combina el arte con la innovación para transformar conceptos en una iluminación fascinante.

Diseñó su primera luminaria premiada mientras estudiaba su licenciatura en diseño, lo que marcó el comienzo de su distinguida carrera. Utilizando técnicas avanzadas de impresión 3D y fresado CNC, garantiza precisión y funcionalidad en cada creación. Bruno combina metodología de diseño, artesanía y alta tecnología, buscando siempre soluciones más sostenibles.


HER team


At Her Lighting we have an extraordinary team of professionals; multidisciplinary and years of experience, focused on designing and producing luminaires that bring beauty and personality to environments through light.

Thanks to our wide experience and high level of specialization, we can develop unique solutions adapted to each project and client. Our products, through their design and careful lighting, complete and enhance both indoor and outdoor spaces.

En Her Lighting contamos con extraordinario equipo de profesionales; multidisciplinar y con años de experiencia, enfocados en diseñar y fabricar luminarias que aporten belleza y personalidad a los ambientes a través de la luz.

Gracias a nuestra amplia experiencia y alto nivel de especialización, podemos desarrollar soluciones únicas adaptadas a cada proyecto y cliente. Nuestros productos, a través de su diseño y cuidada luz, completan y realzan los espacios tanto interiores como exteriores.

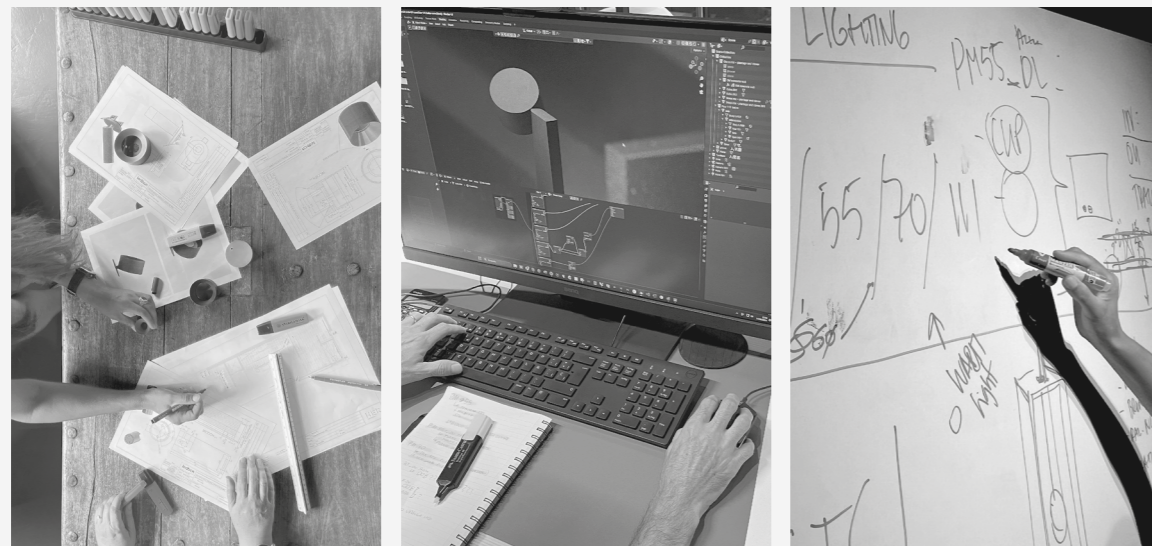

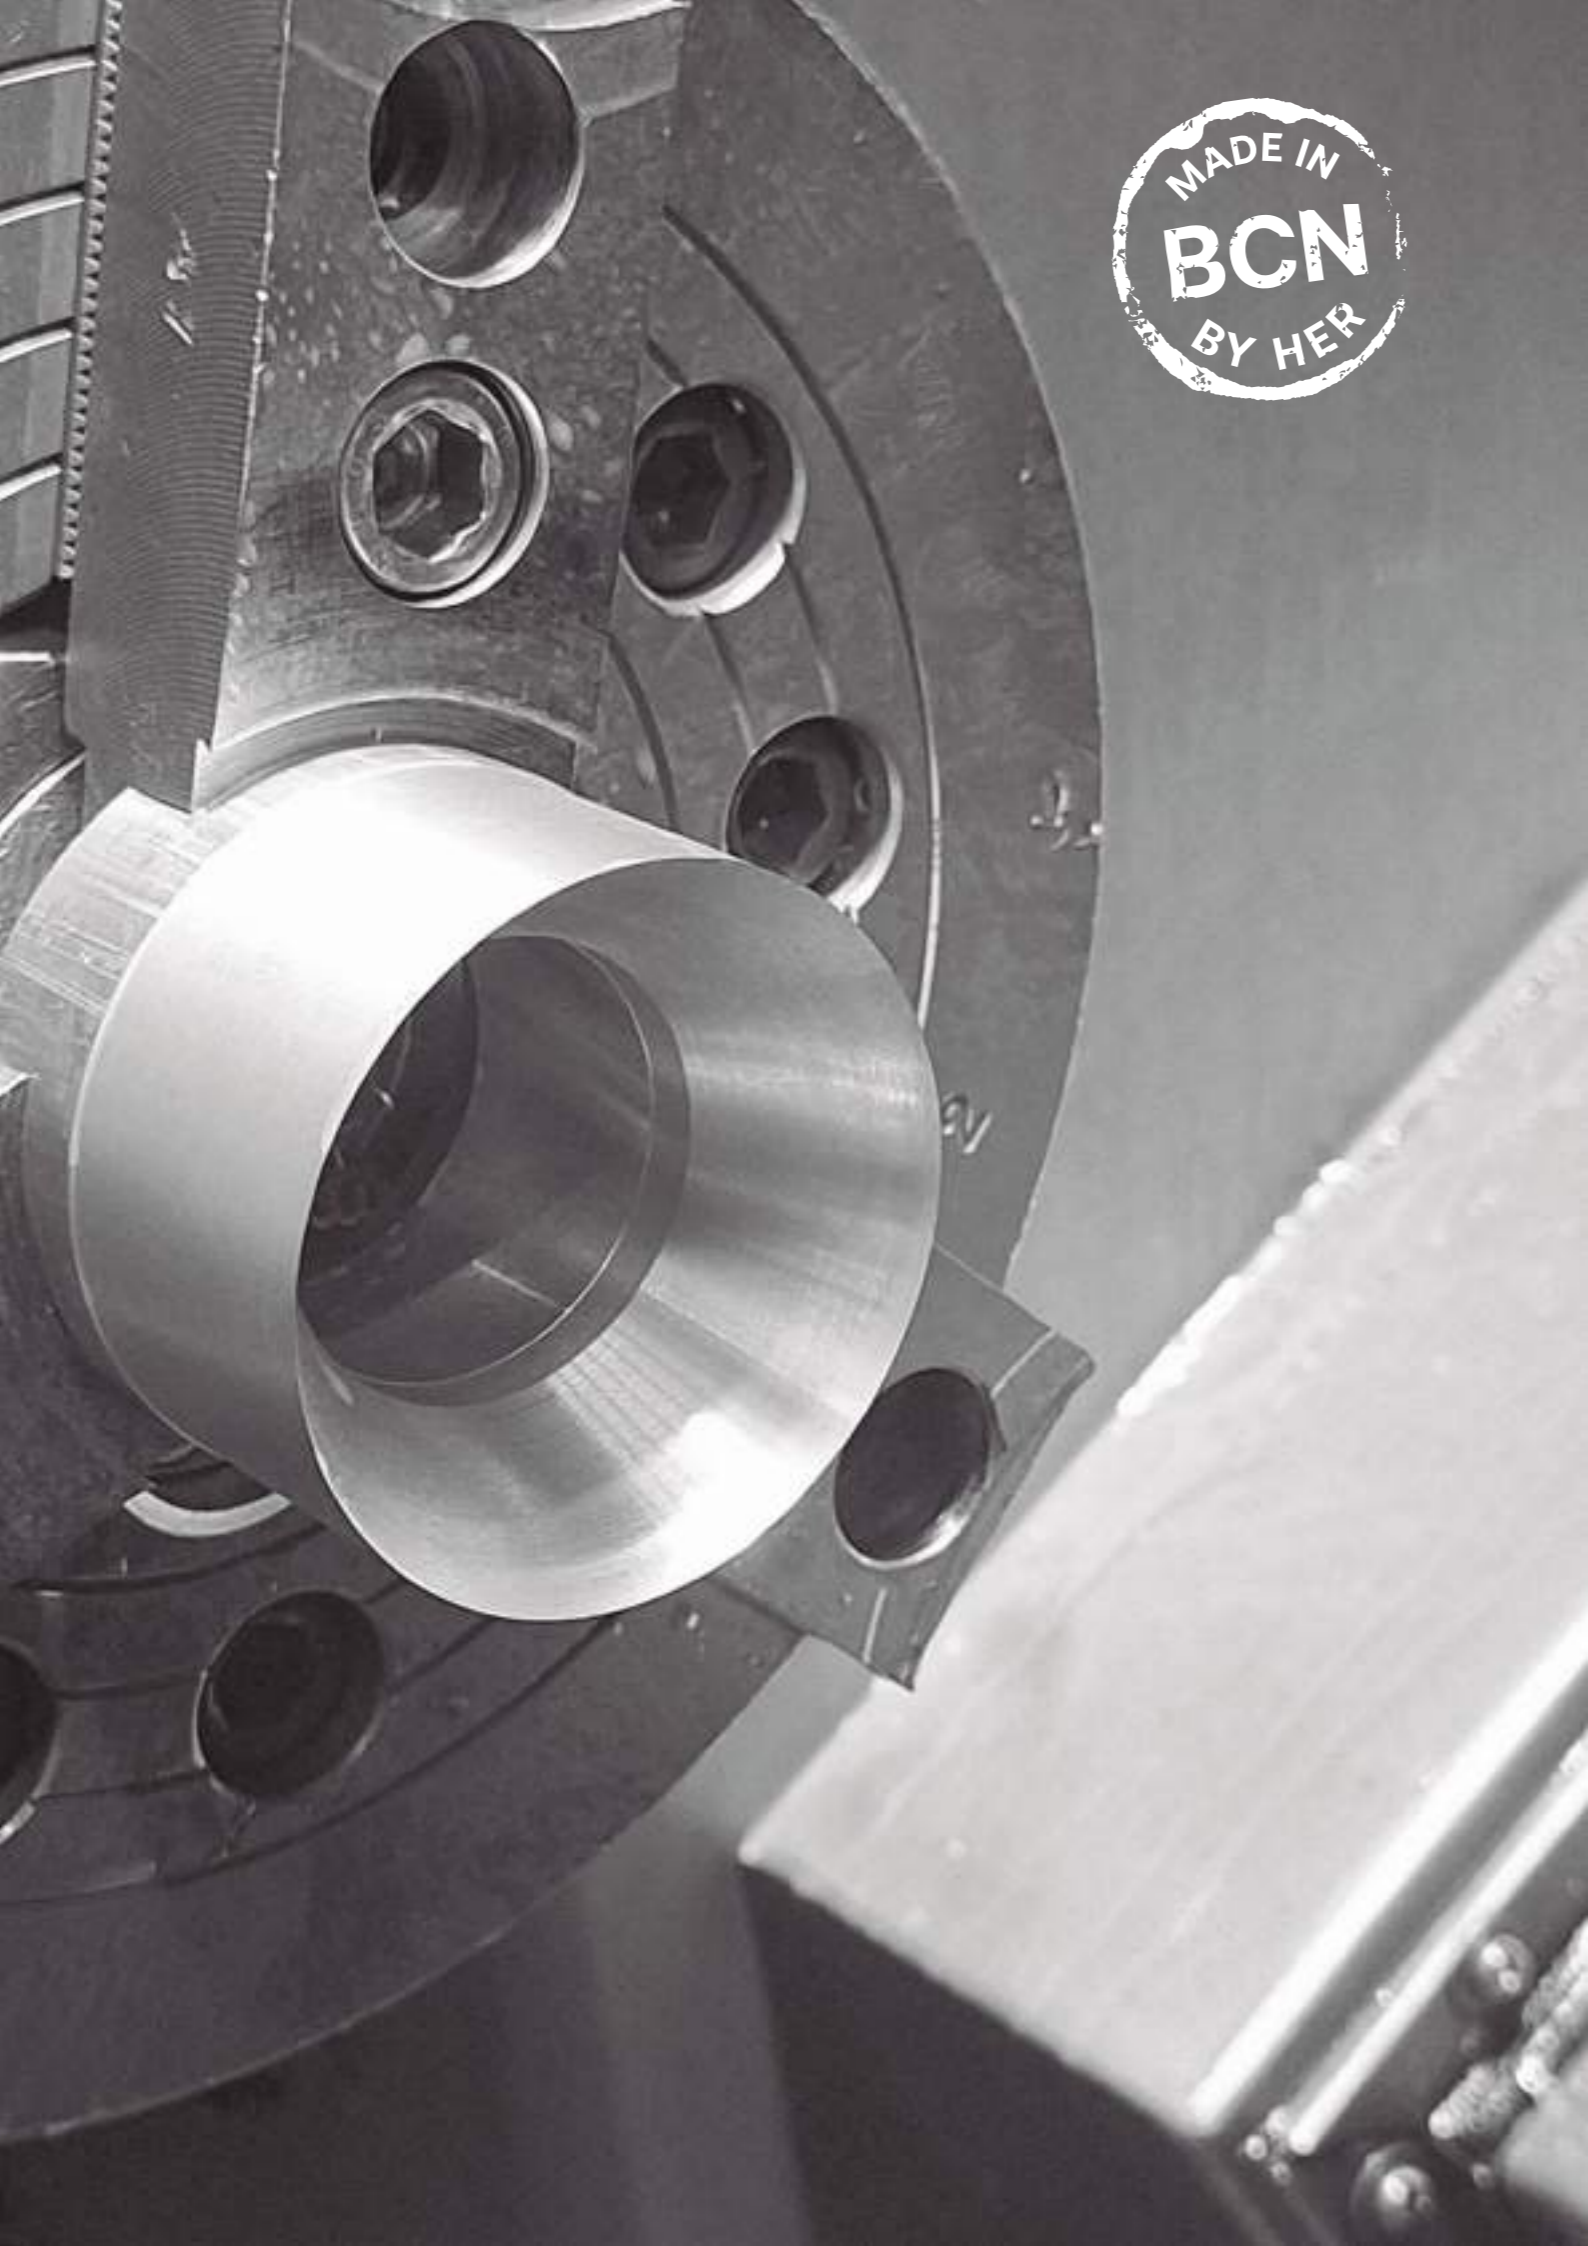

MADE IN
BCN
BY HER

made in BARCELONA

Made in Barcelona, our lighting products are manufactured using local suppliers for all milling, moulding and finishing processes. Each product is meticulously assembled in-house, ensuring the highest quality and supporting local craftsmanship.

Fabricadas en Barcelona, nuestras luminarias se elaboran en talleres locales para todos los procesos de fresado, moldeado y acabado. Cada producto se ensambla meticulosamente en nuestras instalaciones, lo que garantiza la máxima calidad y apoya la industria artesana local.








engineering in BARCELONA

Our engineering department specialises in advanced lighting projects, carrying out prototypes and precise laboratory tests, as well as detailed thermal and optical simulations using sophisticated software to ensure superior performance and innovation.

Nuestro departamento de ingeniería se especializa en proyectos de iluminación complejos, realizando prototipos precisos y pruebas de laboratorio, así como simulaciones térmicas y ópticas detalladas utilizando software sofisticado para garantizar un rendimiento e innovación superiores.

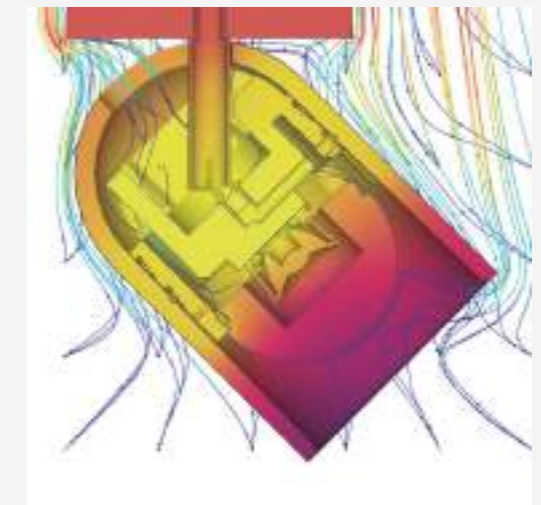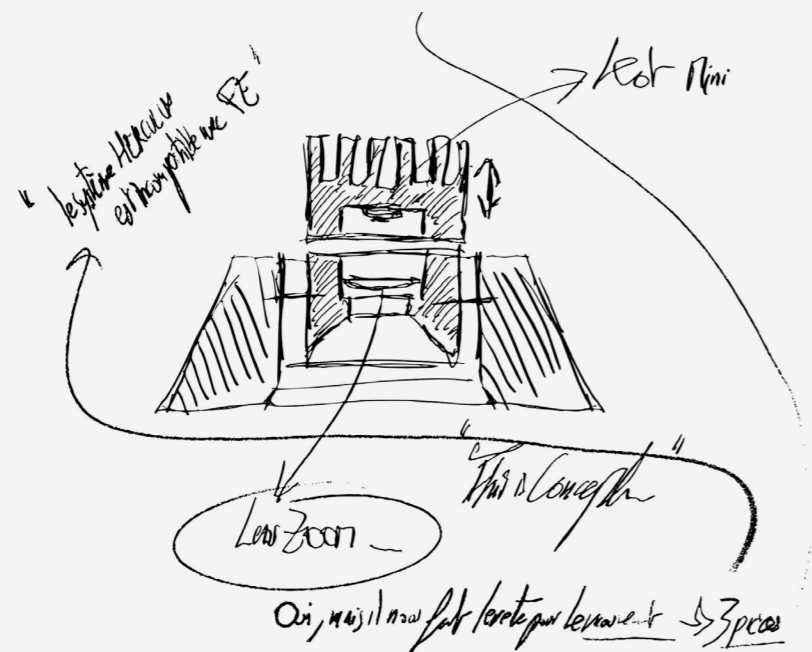

Project development

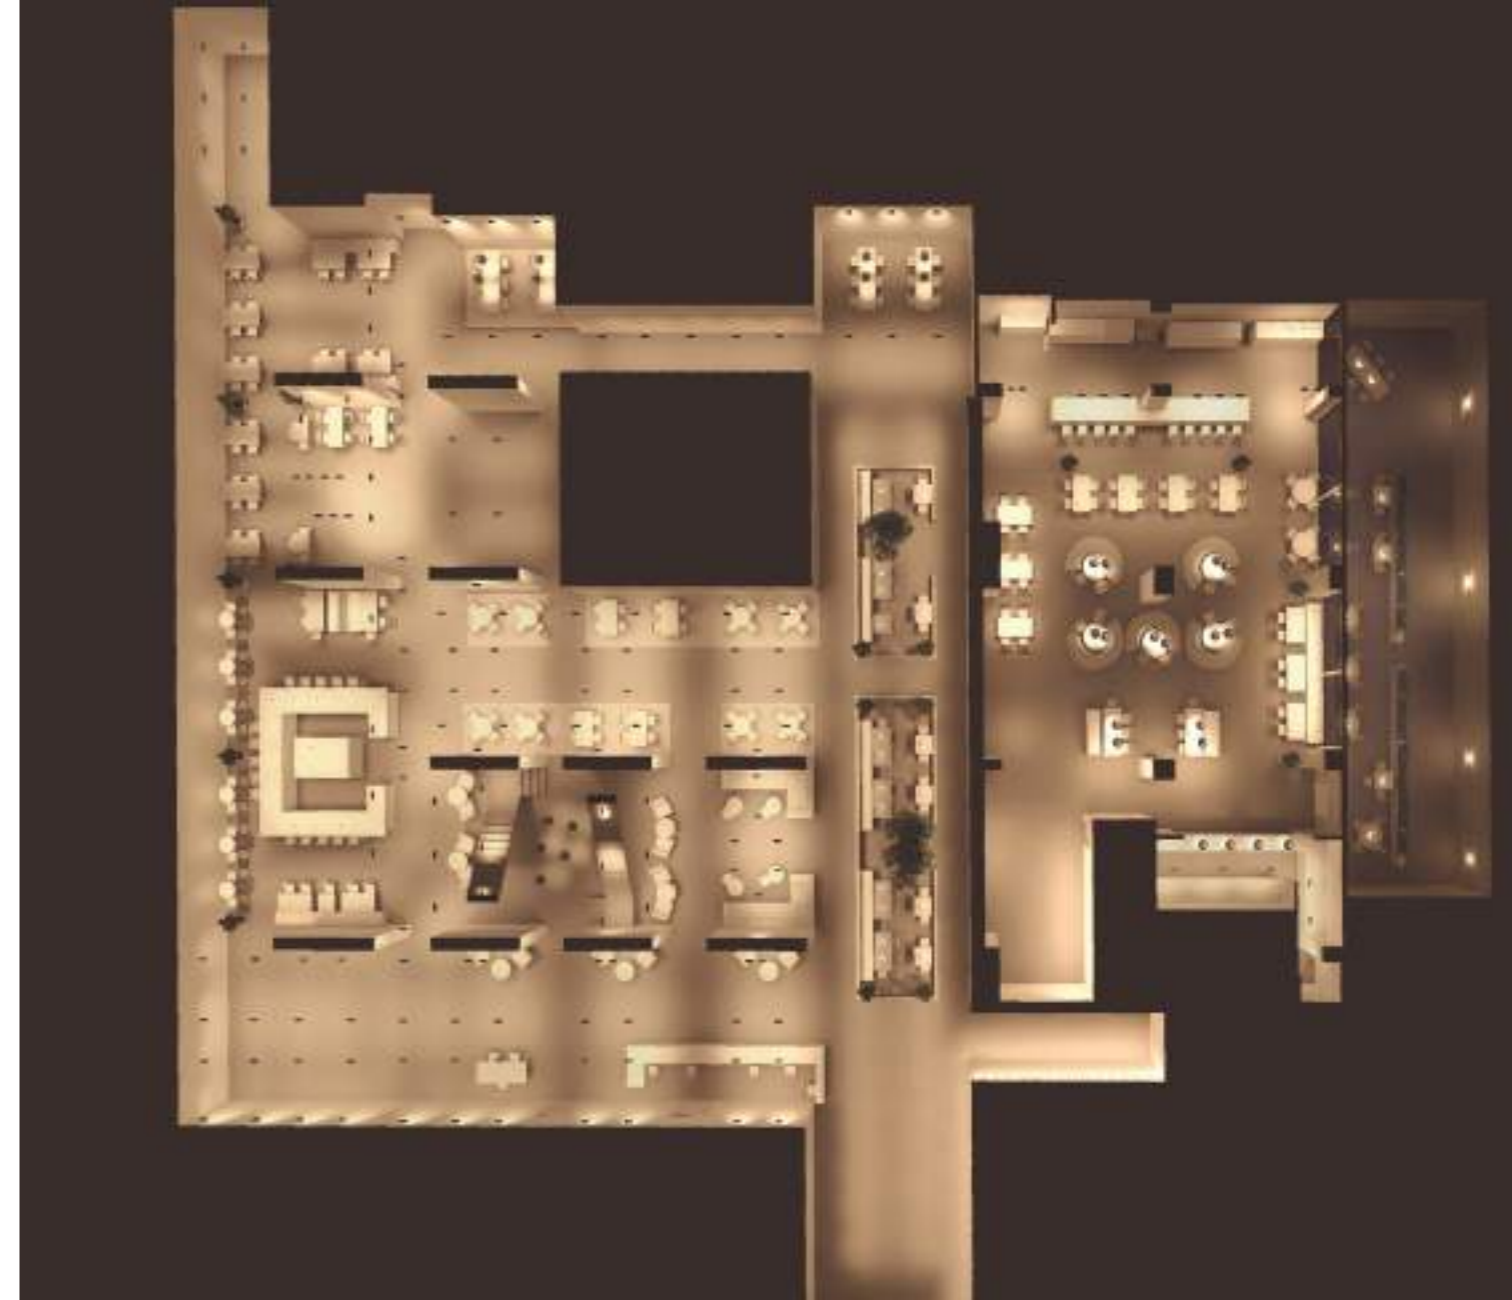

Our project department is made up of a group of multicultural, young, dynamic and flexible professionals who approach lighting projects with enthusiasm and energy. We tackle each project in each of its phases: conceptual, planning, execution and start-up. We analyse and propose the most suitable lighting solutions, taking into account technical, aesthetic and architectural aspects to ensure the final success of the project.






Nuestro departamento de proyectos está formado por conjunto de profesionales multicultural, joven, dinámico y flexible, que afronta los proyectos de iluminación con ilusión y energía. Abordamos cada proyecto en cada una de sus fases; conceptual, planificación, ejecución y puesta en marcha. Analizamos y proponemos las soluciones lumínicas más adecuadas, teniendo en cuenta tanto los aspectos técnicos como estéticos y arquitectónicos, para asegurar de este modo el éxito final de la obra.

NCS colors



In our search for differentiation and harmony with the space, we have included the possibility of customising our Her Collection luminaires with colours from the NCS colour palette. Thus adding a detail of integration and beauty to the lighting project.

En nuestra búsqueda de diferenciación y armonía con el espacio, hemos incluido la posibilidad de personalizar nuestras luminarias Her Collection con colores de la carta NCS. Aportando así un detalle de integración y belleza al proyecto de iluminación.

Oliva	Ocre	Terracota	Mocha	Sand
				
S 7010-G30Y cod. NY	S 5040-Y70R cod. LX	S 3050-Y60R cod. PX	S 5010-Y10R cod. OX	S 2005-Y50R cod. RY

Metallic finishes



We offer a wide and exclusive range of metallic finishes that add a touch of sophistication and elegance to our luminaires. We have a selection of standard metallics and we can also customise luminaires with specific finishes developed for special projects.

Ofrecemos una amplia y exclusiva gama de acabados metálicos que aportan un toque de sofisticación y elegancia a nuestras luminarias. Contamos con una selección de metalizados estándar y también podemos personalizar las luminarias con acabados específicos desarrollados para proyectos especiales.

Gun Metal



cod. DM

Bronze



cod. DN

Brushed Copper



cod. DF

Old Silver



cod. DS

Cava



cod. DG

PM 25_in spot
p. 28

PM 25_in dot double
p. 32

PM 25_on slim
p. 36

PM 25_on dot
p. 40

SOFT 33_in spot
p. 82

PM 46_in dl zoom
p. 86

TORCH 53_in spot
p. 90

PM 25_trk mag
p. 44

PM 29-250_p on
p. 46

PM 29-500_p on
p. 50

PM 55_in dl
p. 96

PM 55_in dl-
p. 100

PM 55_in dl+
p. 102

PM 55_in dl+ tl
p. 106

PM 33_in dl
p. 54

PM 33_in dl+
p. 56

PM 33_in dot double
p. 60

PM 33_in spot
p. 64

PM 55_in spot
p. 108

PM 55+_in spot
p. 112

PM 55+_on spot
p. 116

PM 55_on plate
double
p. 120

PM 33_on plate
double
p. 68

PM 33_on plate triple
p. 72

PM 37-250_p on
p. 76

PM 37-500_p on
p. 80

PM 55_on plate
triple
p. 124

PM 55_trk mag
p. 128

PM 55+_trk mag
p. 130

PM 55+_trk 230V
p. 132

PM 70_in spot
p. 136

PM 70_on fix
p. 140

PM 70_on slim
p. 144

PM 70_p on
p. 148

HALO 40_in fix
p. 180

HALO 73_in fix
p. 184

PM 40_in fix
p. 188

LOW 70_in fix
p. 192

PM 111_in spot
p. 154

PM 111_on fix
p. 158

PM 111_on mov
p. 162

PM 111_p on
p. 166

NIO_in 3x1
p. 198

NIO_in 2x2
p. 200

NIO_in 5x1
p. 202

NIO_in 3x3
p. 204

PM 111_trk mag
p. 170

PM 111_trk 230V
p. 174

NIO_on 2x2
p. 208

NIO_on 3x3
p. 210

Nit Down Pendant
p. 228

Nit UpDown Pend.
p. 232

Nit Down Surface
p. 234

Nit Down Trimless
p. 238

LIV_baliza
p. 262

PM 111_baliza
p. 266

PM 111_on fix ip
p. 270

Nit Down Wall
p. 244

Nit UpDown Wall
p. 246

Nixeven Pendant
p. 248

Nixeven Surface
p. 254

Nixeven Trimless
p. 258

PM 60_on fix gu10
p. 212

PL 80_in fix e27
p. 216

Nik
p. 220

DOT_trk mag
p. 224

PM 25

by *eng*



Elegant, sober and discreet, our PM 25 models offer a minimalist look without renouncing to the highest lighting performance.

Elegantes, sobrios y discretos, nuestros modelos PM 25 ofrecen un look minimalista sin renunciar a las más altas prestaciones lumínicas.



Recessed

in spot p. 28 in dot double p. 32

Surface

on slim p. 36 on dot p. 40

Magnetic

trk mag p. 44


Pendant

29-250_p on p. 46 29-500_p on p. 50

PM 25_in spot



PM 25_in spot



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2115.92700414.x	4,8W	14°	90	2700K	350Lm	73Lm/W
2115.92700439.x	4,8W	39°	90	2700K	350Lm	73Lm/W
2115.93000414.x	4,8W	14°	90	3000K	350Lm	73Lm/W
2115.93000439.x	4,8W	39°	90	3000K	350Lm	73Lm/W

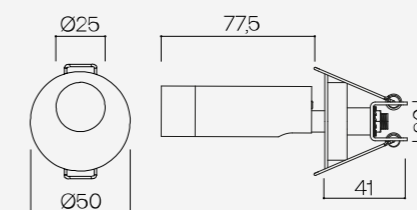

PM 25_in dot double



PM 25_in dot double



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2273.92700414.x	2x4,8W	14°	90	2700K	2x350Lm	73Lm/W
2273.92700439.x	2x4,8W	39°	90	2700K	2x350Lm	73Lm/W
2273.93000414.x	2x4,8W	14°	90	3000K	2x350Lm	73Lm/W
2273.93000439.x	2x4,8W	39°	90	3000K	2x350Lm	73Lm/W

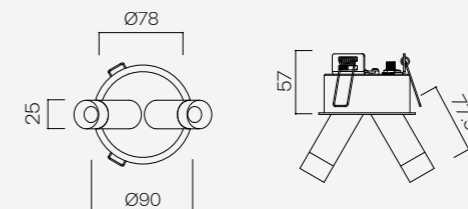

PM 25_on slim

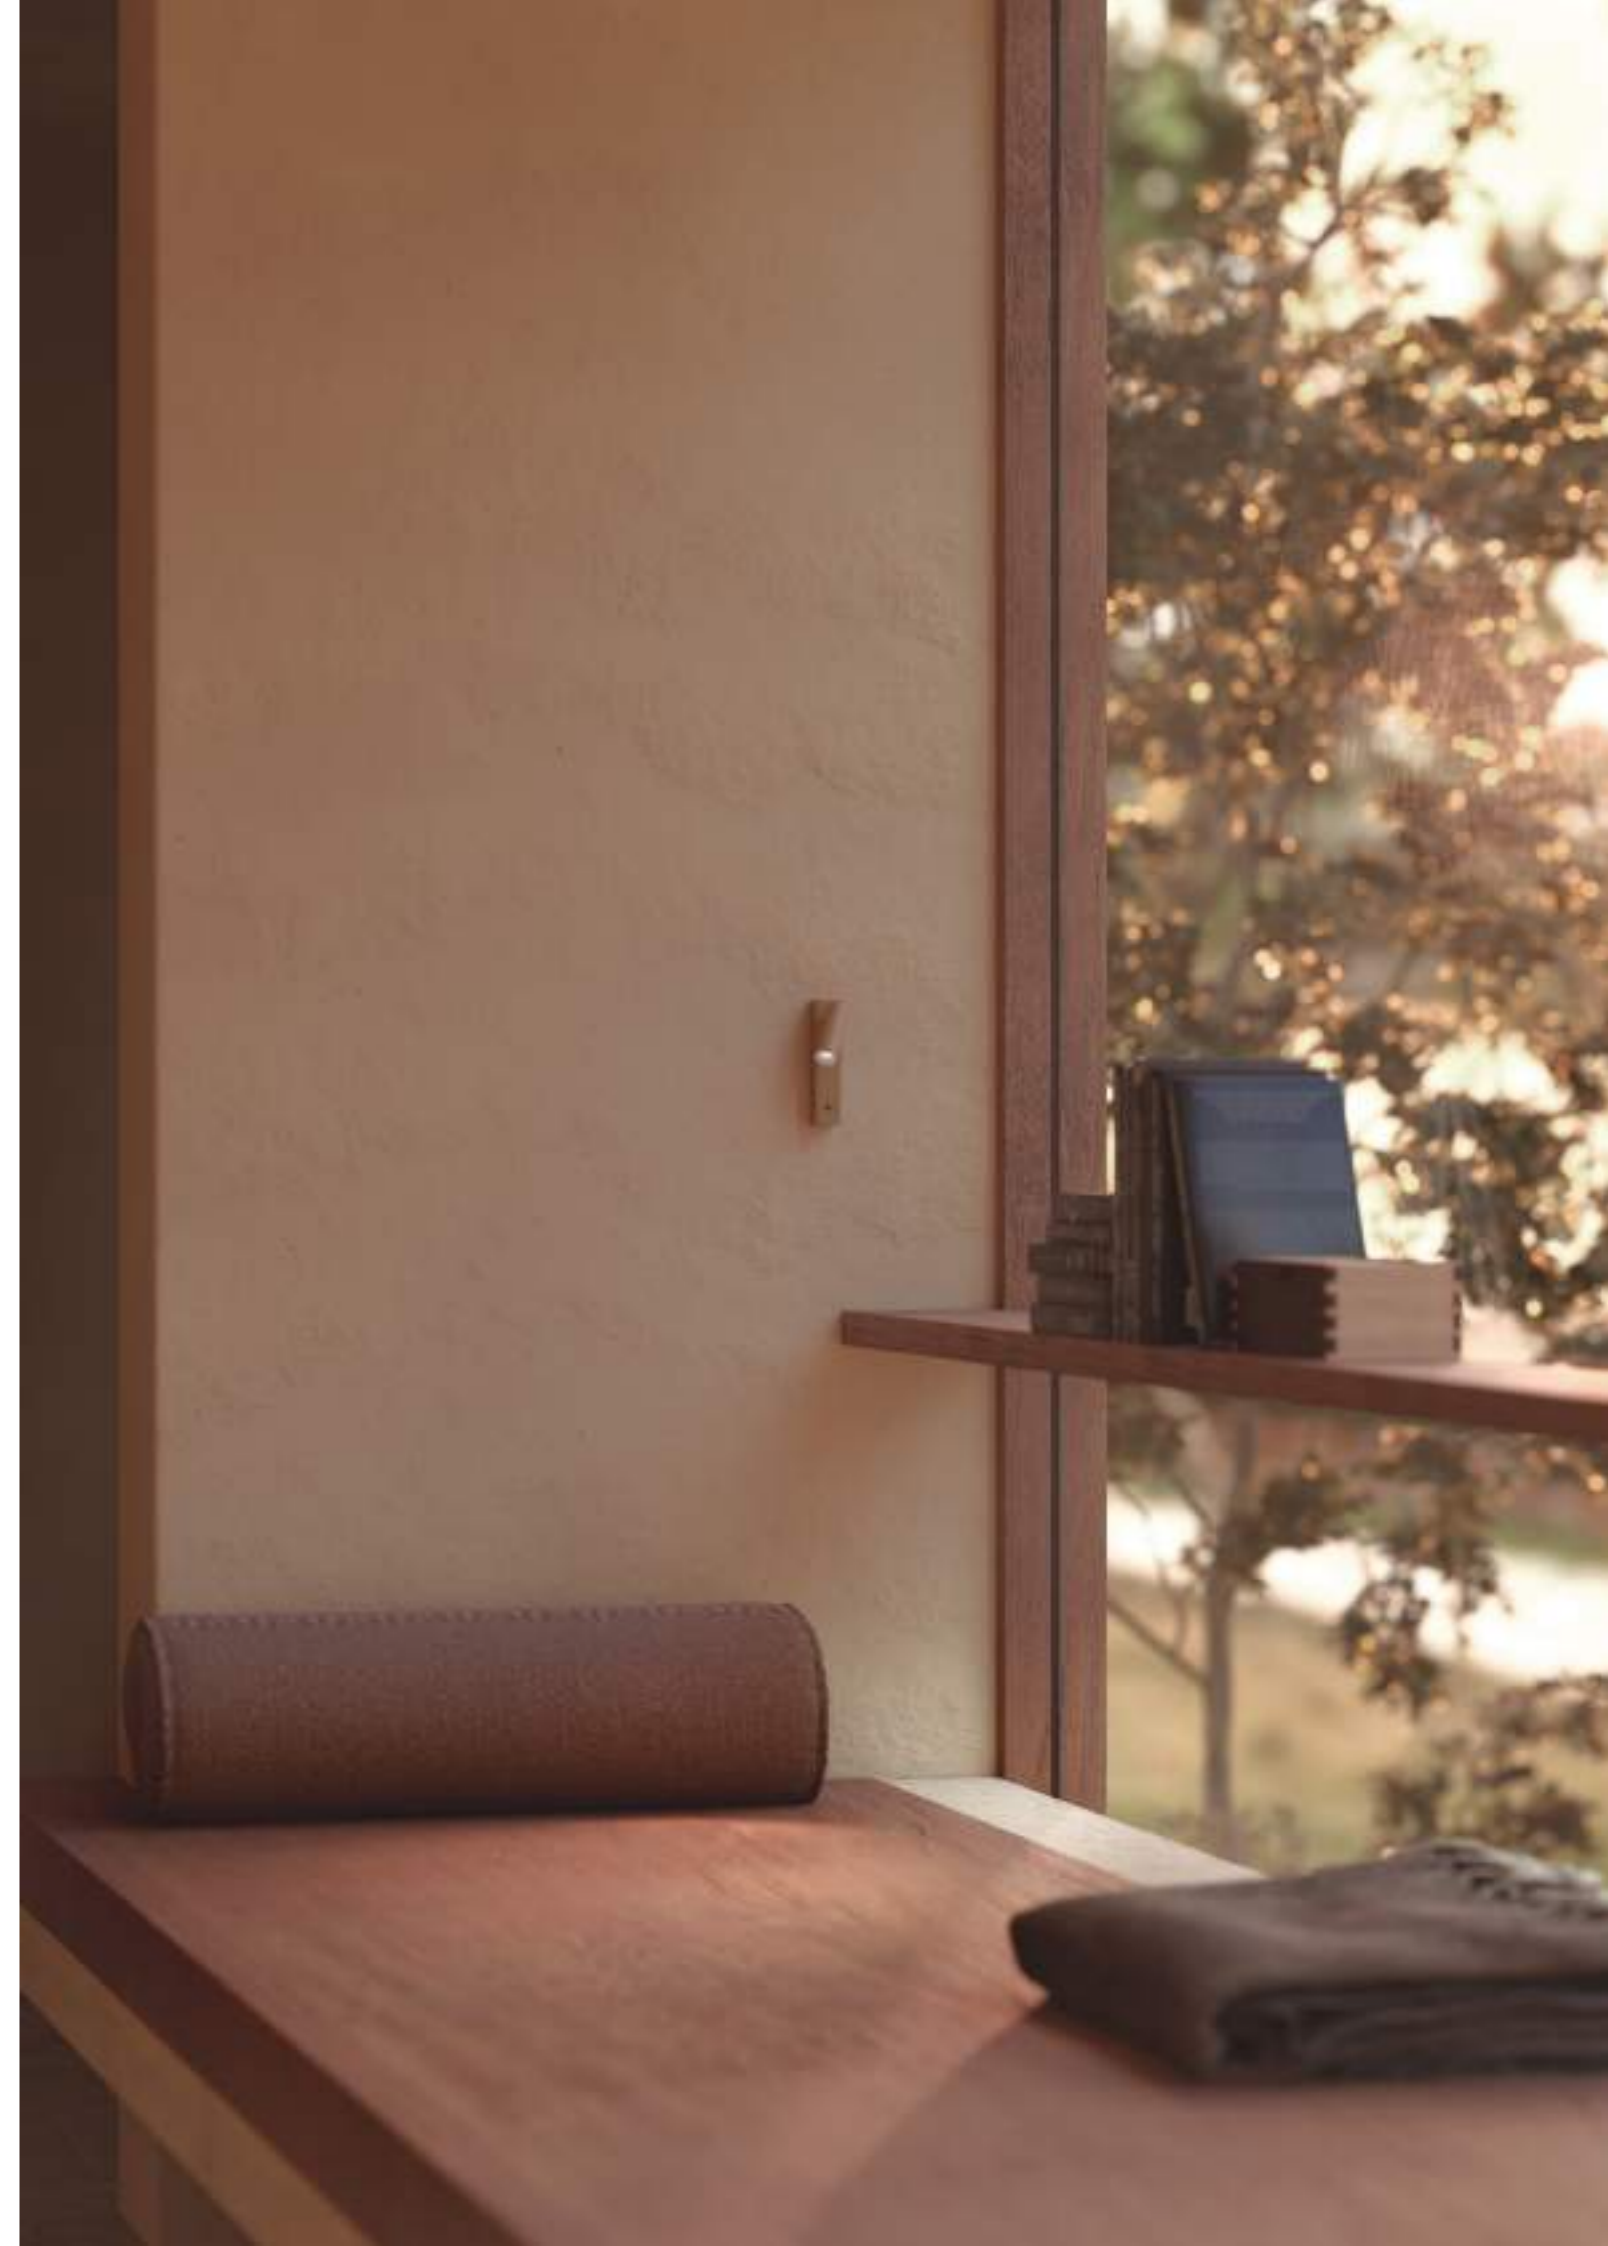

PM 25_on slim



Ask for option without switch
 Consultar opción sin interruptor



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava



Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2244.92700414.x	4,8W	14°	90	2700K	350Lm	73Lm/W
2244.92700439.x	4,8W	39°	90	2700K	350Lm	73Lm/W
2444.93000414.x	4,8W	14°	90	3000K	350Lm	73Lm/W
2244.93000439.x	4,8W	39°	90	3000K	350Lm	73Lm/W



PM 25_on dot

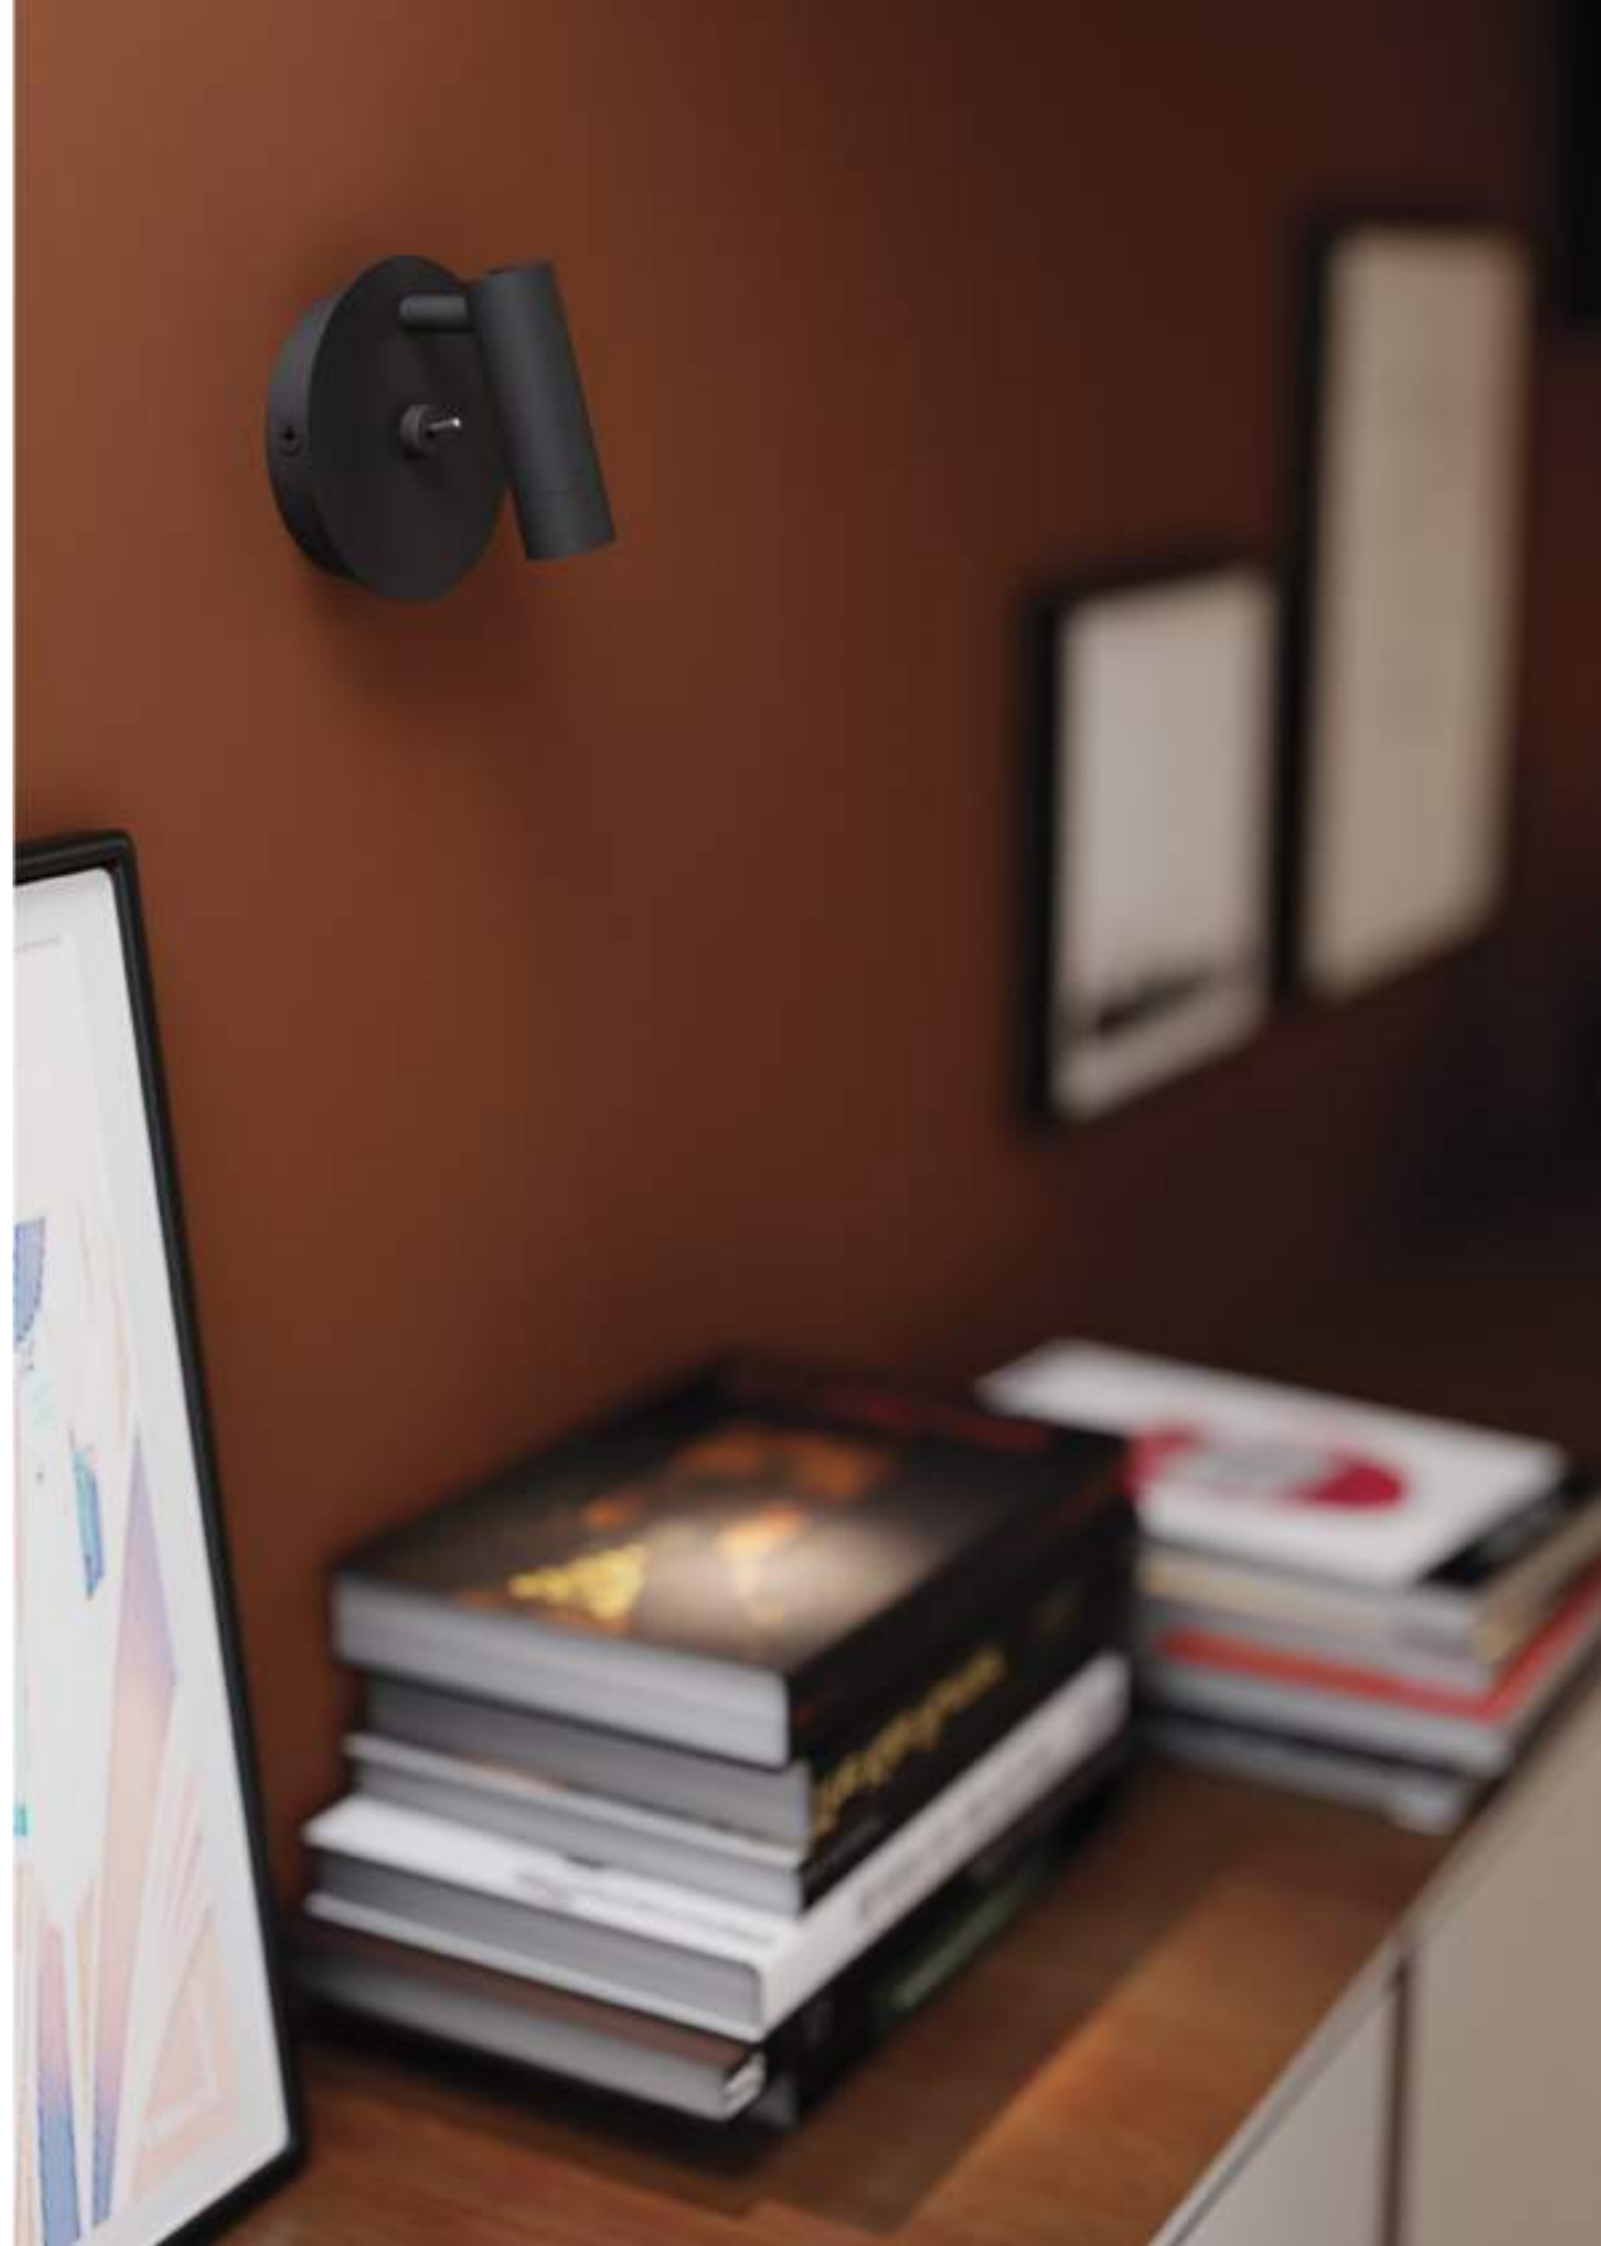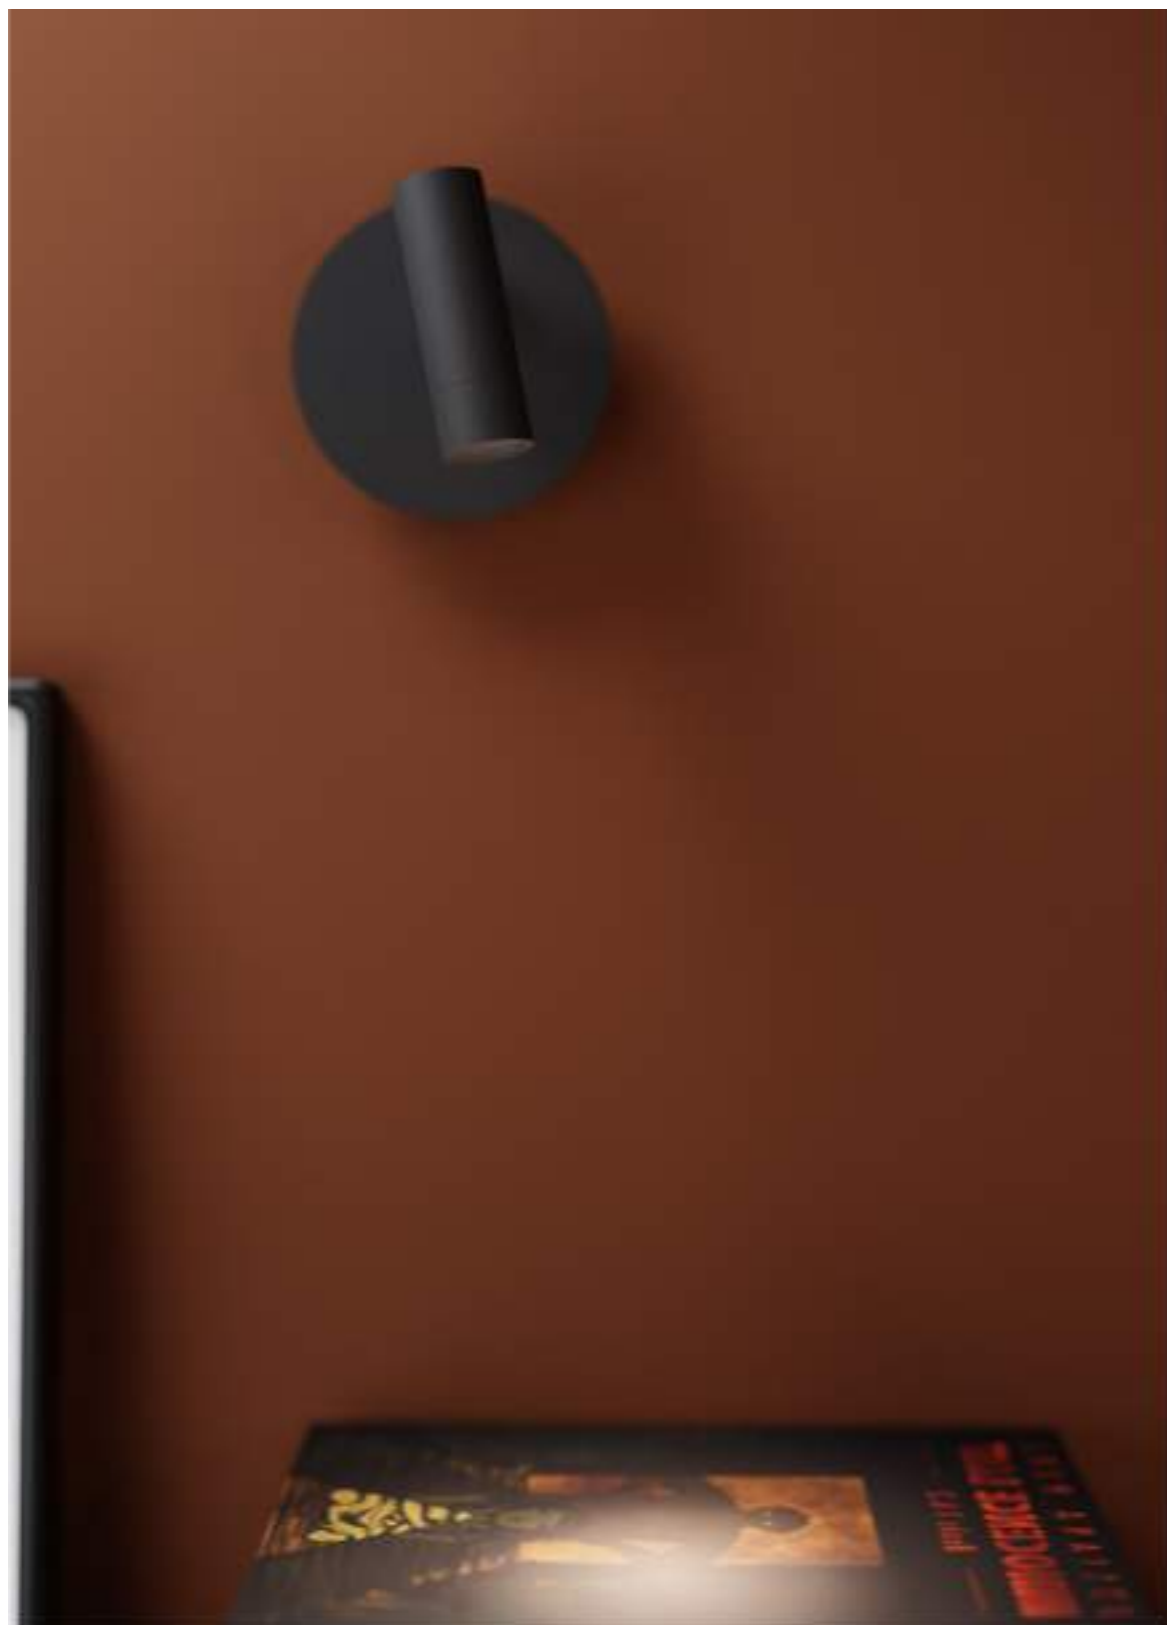

PM 25_on dot



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2208.92700414.x	4,8W	14°	90	2700K	350Lm	73Lm/W
2208.92700439.x	4,8W	39°	90	2700K	350Lm	73Lm/W
2208.93000414.x	4,8W	14°	90	3000K	350Lm	73Lm/W
2208.93000439.x	4,8W	39°	90	3000K	350Lm	73Lm/W



PM 25_trk mag



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Profile Carril

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
6020.92700414.x	4,8W	14°	90	2700K	350Lm	73Lm/W
6020.92700439.x	4,8W	39°	90	2700K	350Lm	73Lm/W
6020.93000414.x	4,8W	14°	90	3000K	350Lm	73Lm/W
6020.93000439.x	4,8W	39°	90	3000K	350Lm	73Lm/W

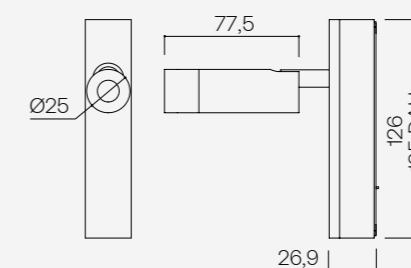

PM 29_p on



PM 29-250_p on



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava



Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
8225.92700414.x	4,8W	14°	90	2700K	350Lm	73Lm/W
8225.92700439.x	4,8W	39°	90	2700K	350Lm	73Lm/W
8225.93000414.x	4,8W	14°	90	3000K	350Lm	73Lm/W
8225.93000439.x	4,8W	39°	90	3000K	350Lm	73Lm/W



Ask for recessed base.
Base de empotrar, consultar.

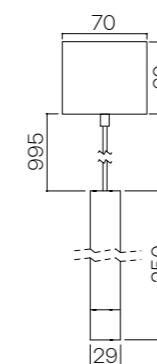

PM 29-500_p on



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
8250.92700414.x	4,8W	14°	90	2700K	350Lm	73Lm/W
8250.92700439.x	4,8W	39°	90	2700K	350Lm	73Lm/W
8250.93000414.x	4,8W	14°	90	3000K	350Lm	73Lm/W
8250.93000439.x	4,8W	39°	90	3000K	350Lm	73Lm/W



Ask for recessed base.
Base de empotrar, consultar.

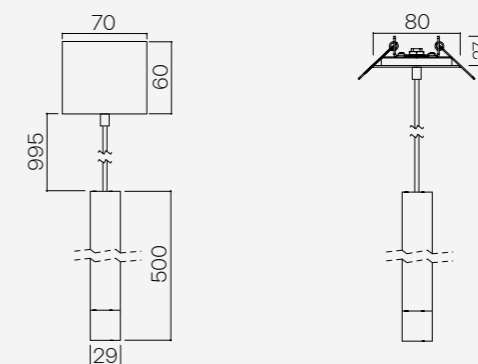

PM 33

by *eng*



Designed with accurate optical control and optimum visual comfort,
our PM 33 models offer flexible and precise lighting solutions.

*Diseñadas con un preciso control óptico y un óptimo confort visual,
nuestros modelos PM 33 ofrecen soluciones lumínicas flexibles y precisas.*



Recessed

in dl p. 54 in dl+ p. 56 in dot double p. 60 in spot p. 64

Surface

on plate double p. 68 on plate triple p. 72


Pendant

250_p on p. 76 500_p on p. 80

PM 33_in dl



Ask for trimless option
Consultar opción trimless



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

Dimming Regulación

- NO-DRV
- DALI DT8

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
- Panel de abeja

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2245.I2700710.x	7,8W	10°	95	2700K	545Lm	70Lm/W
2245.I2700715.x	7,8W	15°	95	2700K	545Lm	70Lm/W
2245.I2700724.x	7,8W	24°	95	2700K	545Lm	70Lm/W
2245.I2700736.x	7,8W	36°	95	2700K	545Lm	70Lm/W
2245.I2700750.x	7,8W	50°	95	2700K	545Lm	70Lm/W
2245.I3000710.x	7,8W	10°	95	3000K	573Lm	74Lm/W
2245.I3000715.x	7,8W	15°	95	3000K	573Lm	74Lm/W
2245.I3000724.x	7,8W	24°	95	3000K	573Lm	74Lm/W
2245.I3000736.x	7,8W	36°	95	3000K	573Lm	74Lm/W
2245.I3000750.x	7,8W	50°	95	3000K	573Lm	74Lm/W
2245.I4000710.x	7,8W	10°	95	4000K	629Lm	81Lm/W
2245.I4000715.x	7,8W	15°	95	4000K	629Lm	81Lm/W
2245.I4000724.x	7,8W	24°	95	4000K	629Lm	81Lm/W
2245.I4000736.x	7,8W	36°	95	4000K	629Lm	81Lm/W
2245.I4000750.x	7,8W	50°	95	4000K	629Lm	81Lm/W

Tunable White


2245.TWB00515.x	6,2W	15°	90	1800-4000K	275-450Lm	45-73Lm/W
2245.TWB00524.x	6,2W	24°	90	1800-4000K	275-450Lm	45-73Lm/W
2245.TWB00536.x	6,2W	36°	90	1800-4000K	275-450Lm	45-73Lm/W
2245.TWB00550.x	6,2W	50°	90	1800-4000K	275-450Lm	45-73Lm/W



PM 33_in dl+

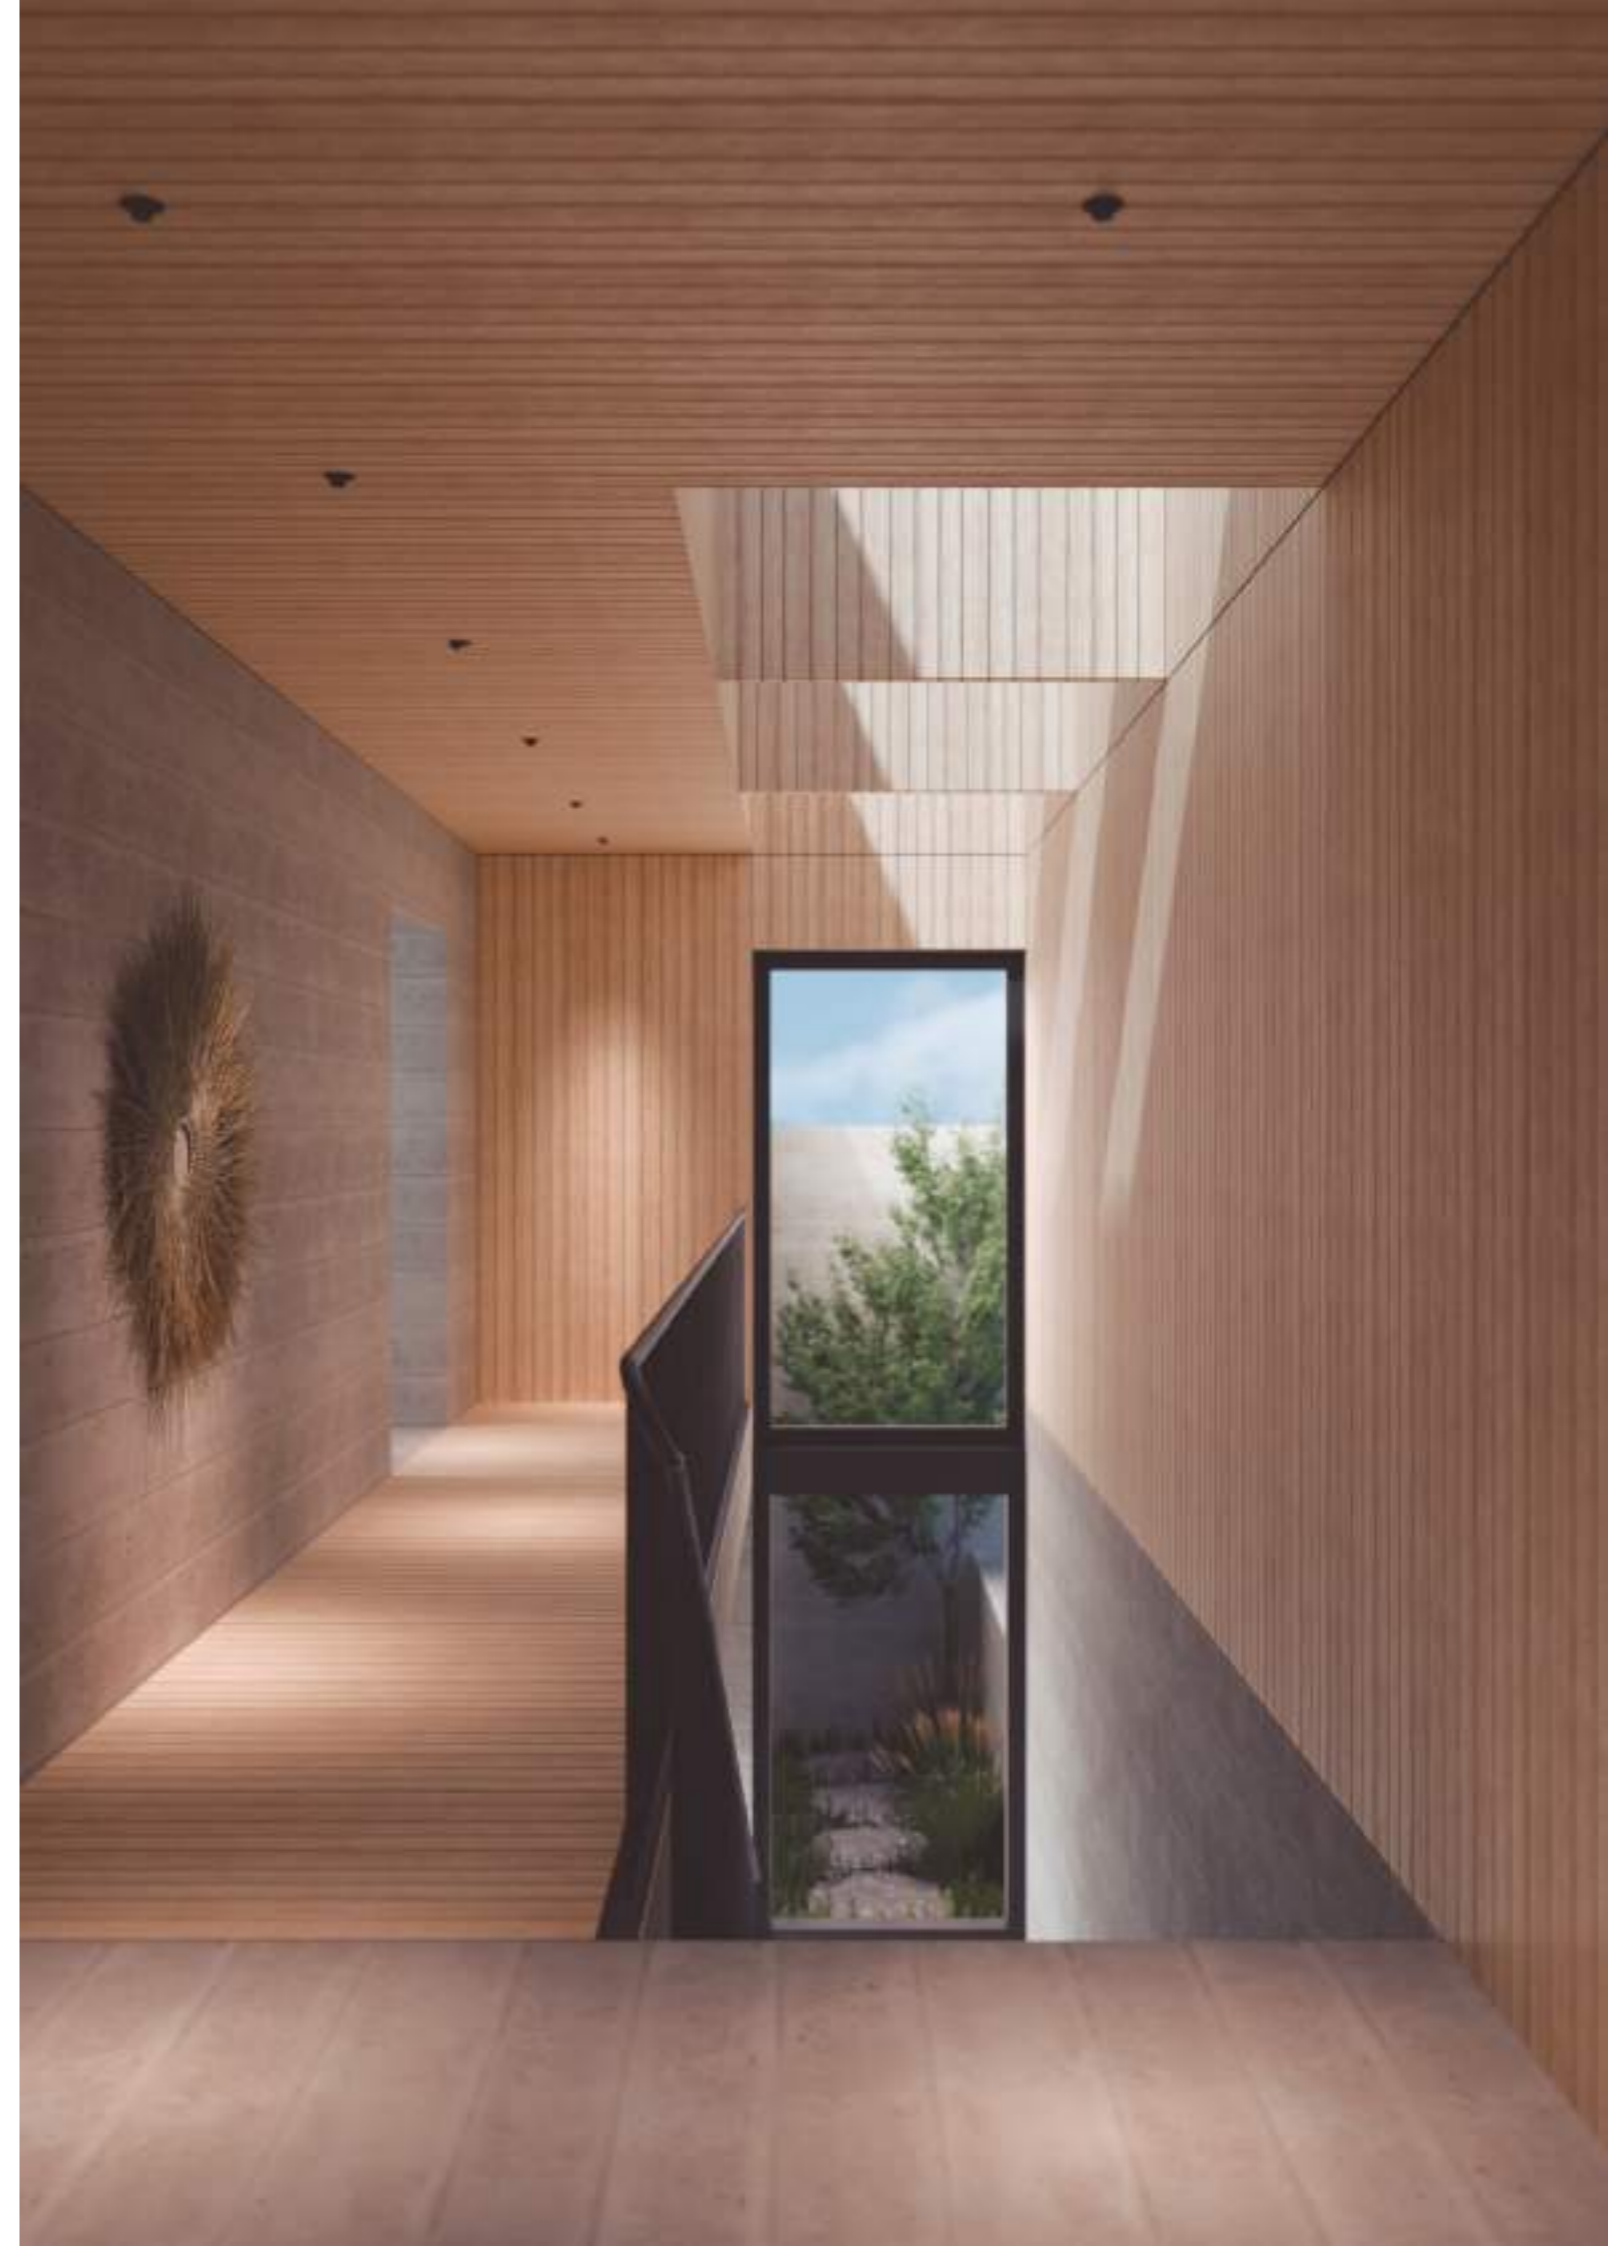

PM 33_in dl+



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

Dimming Regulación

- NO-DRV
- DALI DT8

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2246.I2700710.x	7,8W	10°	95	2700K	545Lm	70Lm/W
2246.I2700715.x	7,8W	15°	95	2700K	545Lm	70Lm/W
2246.I2700724.x	7,8W	24°	95	2700K	545Lm	70Lm/W
2246.I2700736.x	7,8W	36°	95	2700K	545Lm	70Lm/W
2246.I2700750.x	7,8W	50°	95	2700K	545Lm	70Lm/W
2246.I3000710.x	7,8W	10°	95	3000K	573Lm	74Lm/W
2246.I3000715.x	7,8W	15°	95	3000K	573Lm	74Lm/W
2246.I3000724.x	7,8W	24°	95	3000K	573Lm	74Lm/W
2246.I3000736.x	7,8W	36°	95	3000K	573Lm	74Lm/W
2246.I3000750.x	7,8W	50°	95	3000K	573Lm	74Lm/W
2246.I4000710.x	7,8W	10°	95	4000K	629Lm	81Lm/W
2246.I4000715.x	7,8W	15°	95	4000K	629Lm	81Lm/W
2246.I4000724.x	7,8W	24°	95	4000K	629Lm	81Lm/W
2246.I4000736.x	7,8W	36°	95	4000K	629Lm	81Lm/W
2246.I4000750.x	7,8W	50°	95	4000K	629Lm	81Lm/W

Tunable White


2246.TWB00515.x	6,2W	15°	90	1800-4000K	275-450Lm	45-73Lm/W
2246.TWB00524.x	6,2W	24°	90	1800-4000K	275-450Lm	45-73Lm/W
2246.TWB00536.x	6,2W	36°	90	1800-4000K	275-450Lm	45-73Lm/W
2246.TWB00550.x	6,2W	50°	90	1800-4000K	275-450Lm	45-73Lm/W



PM 33_in dot double

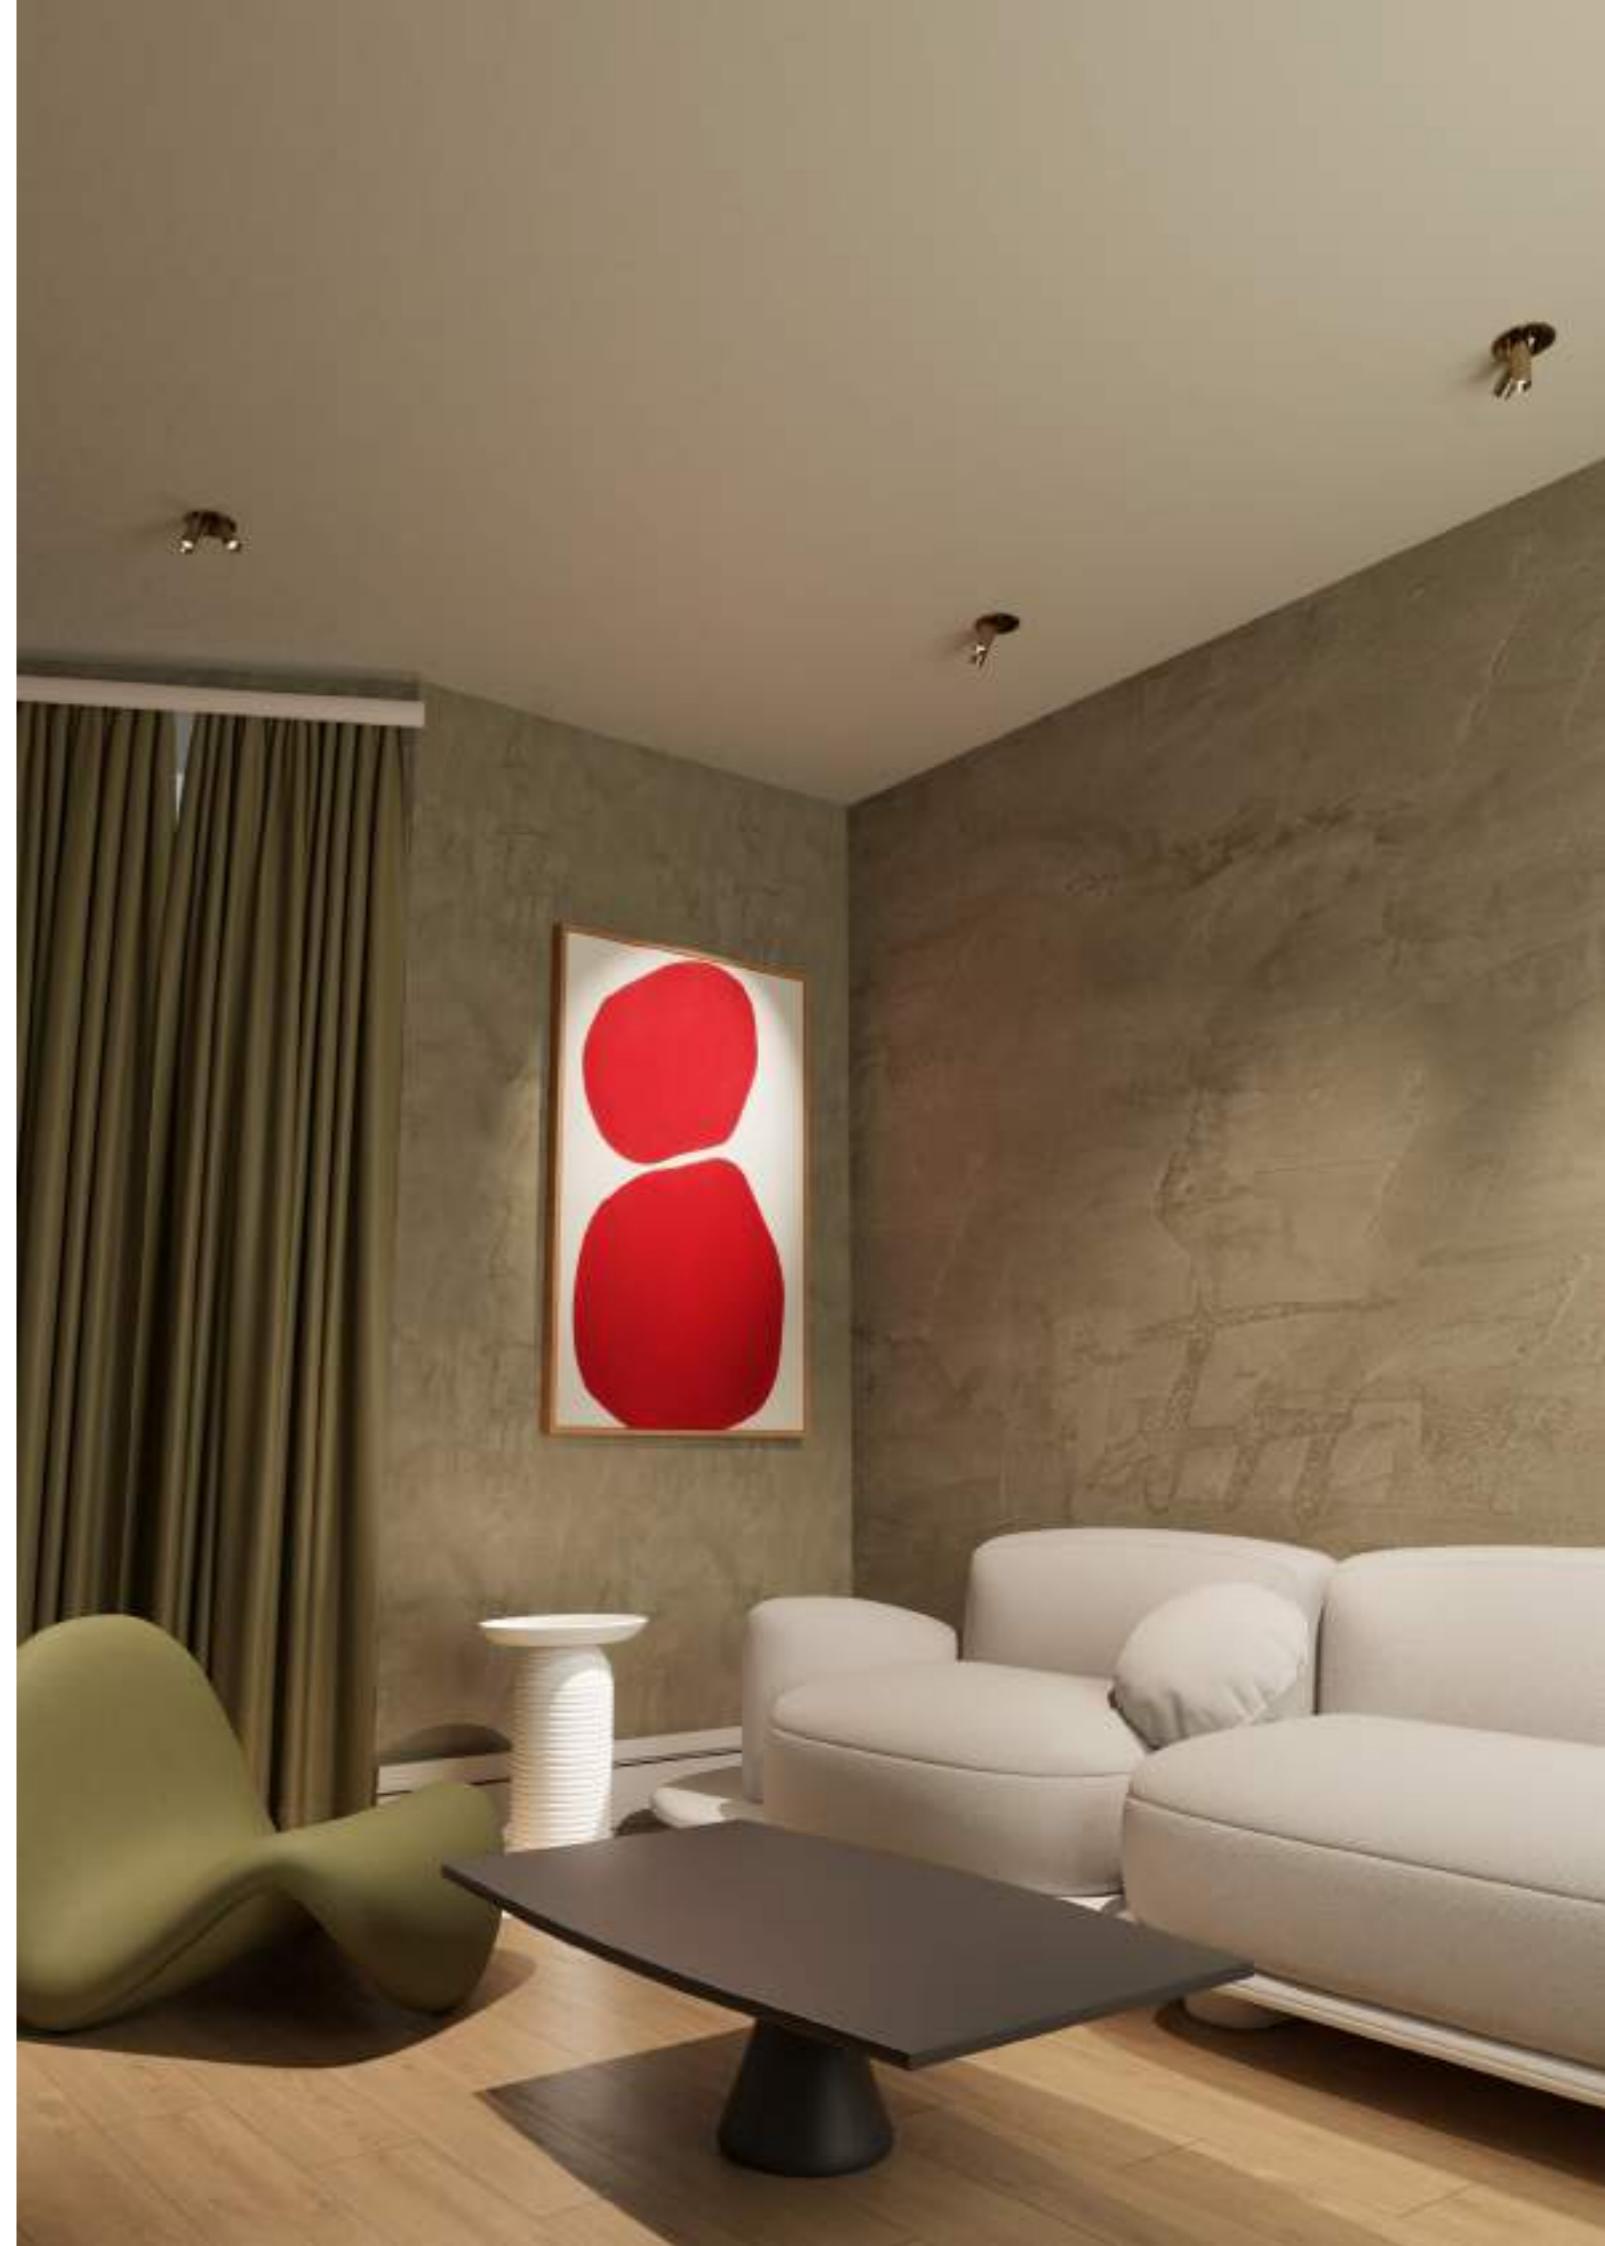

PM 33_in dot double



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

Dimming Regulación

- NO-DRV
- DALI DT8

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
- *Panal de abeja*

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2274.I2700710.x	2x7,8W	10°	95	2700K	2x545Lm	70Lm/W
2274.I2700715.x	2x7,8W	15°	95	2700K	2x545Lm	70Lm/W
2274.I2700724.x	2x7,8W	24°	95	2700K	2x545Lm	70Lm/W
2274.I2700736.x	2x7,8W	36°	95	2700K	2x545Lm	70Lm/W
2274.I2700750.x	2x7,8W	50°	95	2700K	2x545Lm	70Lm/W
2274.I3000710.x	2x7,8W	10°	95	3000K	2x573Lm	74Lm/W
2274.I3000715.x	2x7,8W	15°	95	3000K	2x573Lm	74Lm/W
2274.I3000724.x	2x7,8W	24°	95	3000K	2x573Lm	74Lm/W
2274.I3000736.x	2x7,8W	36°	95	3000K	2x573Lm	74Lm/W
2274.I3000750.x	2x7,8W	50°	95	3000K	2x573Lm	74Lm/W
2274.I4000710.x	2x7,8W	10°	95	4000K	2x629Lm	81Lm/W
2274.I4000715.x	2x7,8W	15°	95	4000K	2x629Lm	81Lm/W
2274.I4000724.x	2x7,8W	24°	95	4000K	2x629Lm	81Lm/W
2274.I4000736.x	2x7,8W	36°	95	4000K	2x629Lm	81Lm/W
2274.I4000750.x	2x7,8W	50°	95	4000K	2x629Lm	81Lm/W

Tunable White


2274.TWB00515.x	2x6,2W	15°	90	1800-4000K	2x275-450Lm	45-73Lm/W
2274.TWB00524.x	2x6,2W	24°	90	1800-4000K	2x275-450Lm	45-73Lm/W
2274.TWB00536.x	2x6,2W	36°	90	1800-4000K	2x275-450Lm	45-73Lm/W
2274.TWB00550.x	2x6,2W	50°	90	1800-4000K	2x275-450Lm	45-73Lm/W

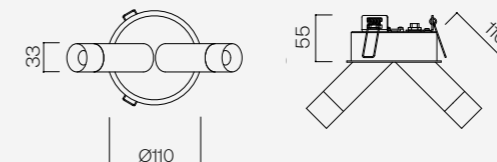

PM 33_in spot



PM 33_in spot



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

Dimming Regulación

- NO-DRV
- DALI DT8

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
- Panal de abeja*

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2243.I2700710.x	7,8W	10°	95	2700K	545Lm	70Lm/W
2243.I2700715.x	7,8W	15°	95	2700K	545Lm	70Lm/W
2243.I2700724.x	7,8W	24°	95	2700K	545Lm	70Lm/W
2243.I2700736.x	7,8W	36°	95	2700K	545Lm	70Lm/W
2243.I2700750.x	7,8W	50°	95	2700K	545Lm	70Lm/W
2243.I3000710.x	7,8W	10°	95	3000K	573Lm	74Lm/W
2243.I3000715.x	7,8W	15°	95	3000K	573Lm	74Lm/W
2243.I3000724.x	7,8W	24°	95	3000K	573Lm	74Lm/W
2243.I3000736.x	7,8W	36°	95	3000K	573Lm	74Lm/W
2243.I3000750.x	7,8W	50°	95	3000K	573Lm	74Lm/W
2243.I4000710.x	7,8W	10°	95	4000K	629Lm	81Lm/W
2243.I4000715.x	7,8W	15°	95	4000K	629Lm	81Lm/W
2243.I4000724.x	7,8W	24°	95	4000K	629Lm	81Lm/W
2243.I4000736.x	7,8W	36°	95	4000K	629Lm	81Lm/W
2243.I4000750.x	7,8W	50°	95	4000K	629Lm	81Lm/W

Tunable White

2243.TWB00515.x	6,2W	15°	90	1800-4000K	275-450Lm	45-73Lm/W
2243.TWB00524.x	6,2W	24°	90	1800-4000K	275-450Lm	45-73Lm/W
2243.TWB00536.x	6,2W	36°	90	1800-4000K	275-450Lm	45-73Lm/W
2243.TWB00550.x	6,2W	50°	90	1800-4000K	275-450Lm	45-73Lm/W



PM 33_on plate double



PM 33_on plate double



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

Dimming Regulación

- NO-DRV
- DALI DT8

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
- Panal de abeja*

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2271.I2700710.x	2x7,8W	10°	95	2700K	2x545Lm	70Lm/W
2271.I2700715.x	2x7,8W	15°	95	2700K	2x545Lm	70Lm/W
2271.I2700724.x	2x7,8W	24°	95	2700K	2x545Lm	70Lm/W
2271.I2700736.x	2x7,8W	36°	95	2700K	2x545Lm	70Lm/W
2271.I2700750.x	2x7,8W	50°	95	2700K	2x545Lm	70Lm/W
2271.I3000710.x	2x7,8W	10°	95	3000K	2x573Lm	74Lm/W
2271.I3000715.x	2x7,8W	15°	95	3000K	2x573Lm	74Lm/W
2271.I3000724.x	2x7,8W	24°	95	3000K	2x573Lm	74Lm/W
2271.I3000736.x	2x7,8W	36°	95	3000K	2x573Lm	74Lm/W
2271.I3000750.x	2x7,8W	50°	95	3000K	2x573Lm	74Lm/W
2271.I4000710.x	2x7,8W	10°	95	4000K	2x629Lm	81Lm/W
2271.I4000715.x	2x7,8W	15°	95	4000K	2x629Lm	81Lm/W
2271.I4000724.x	2x7,8W	24°	95	4000K	2x629Lm	81Lm/W
2271.I4000736.x	2x7,8W	36°	95	4000K	2x629Lm	81Lm/W
2271.I4000750.x	2x7,8W	50°	95	4000K	2x629Lm	81Lm/W

Tunable White

2271.TWB00515.x	2x6,2W	15°	90	1800-4000K	275-450Lm	45-73Lm/W
2271.TWB00524.x	2x6,2W	24°	90	1800-4000K	275-450Lm	45-73Lm/W
2271.TWB00536.x	2x6,2W	36°	90	1800-4000K	275-450Lm	45-73Lm/W
2271.TWB00550.x	2x6,2W	50°	90	1800-4000K	275-450Lm	45-73Lm/W

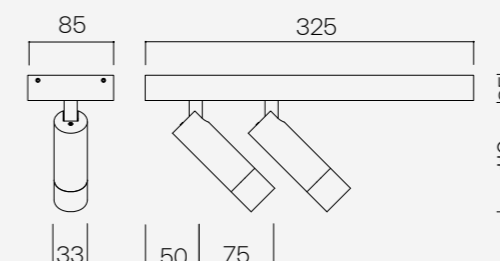

PM 33_on plate triple

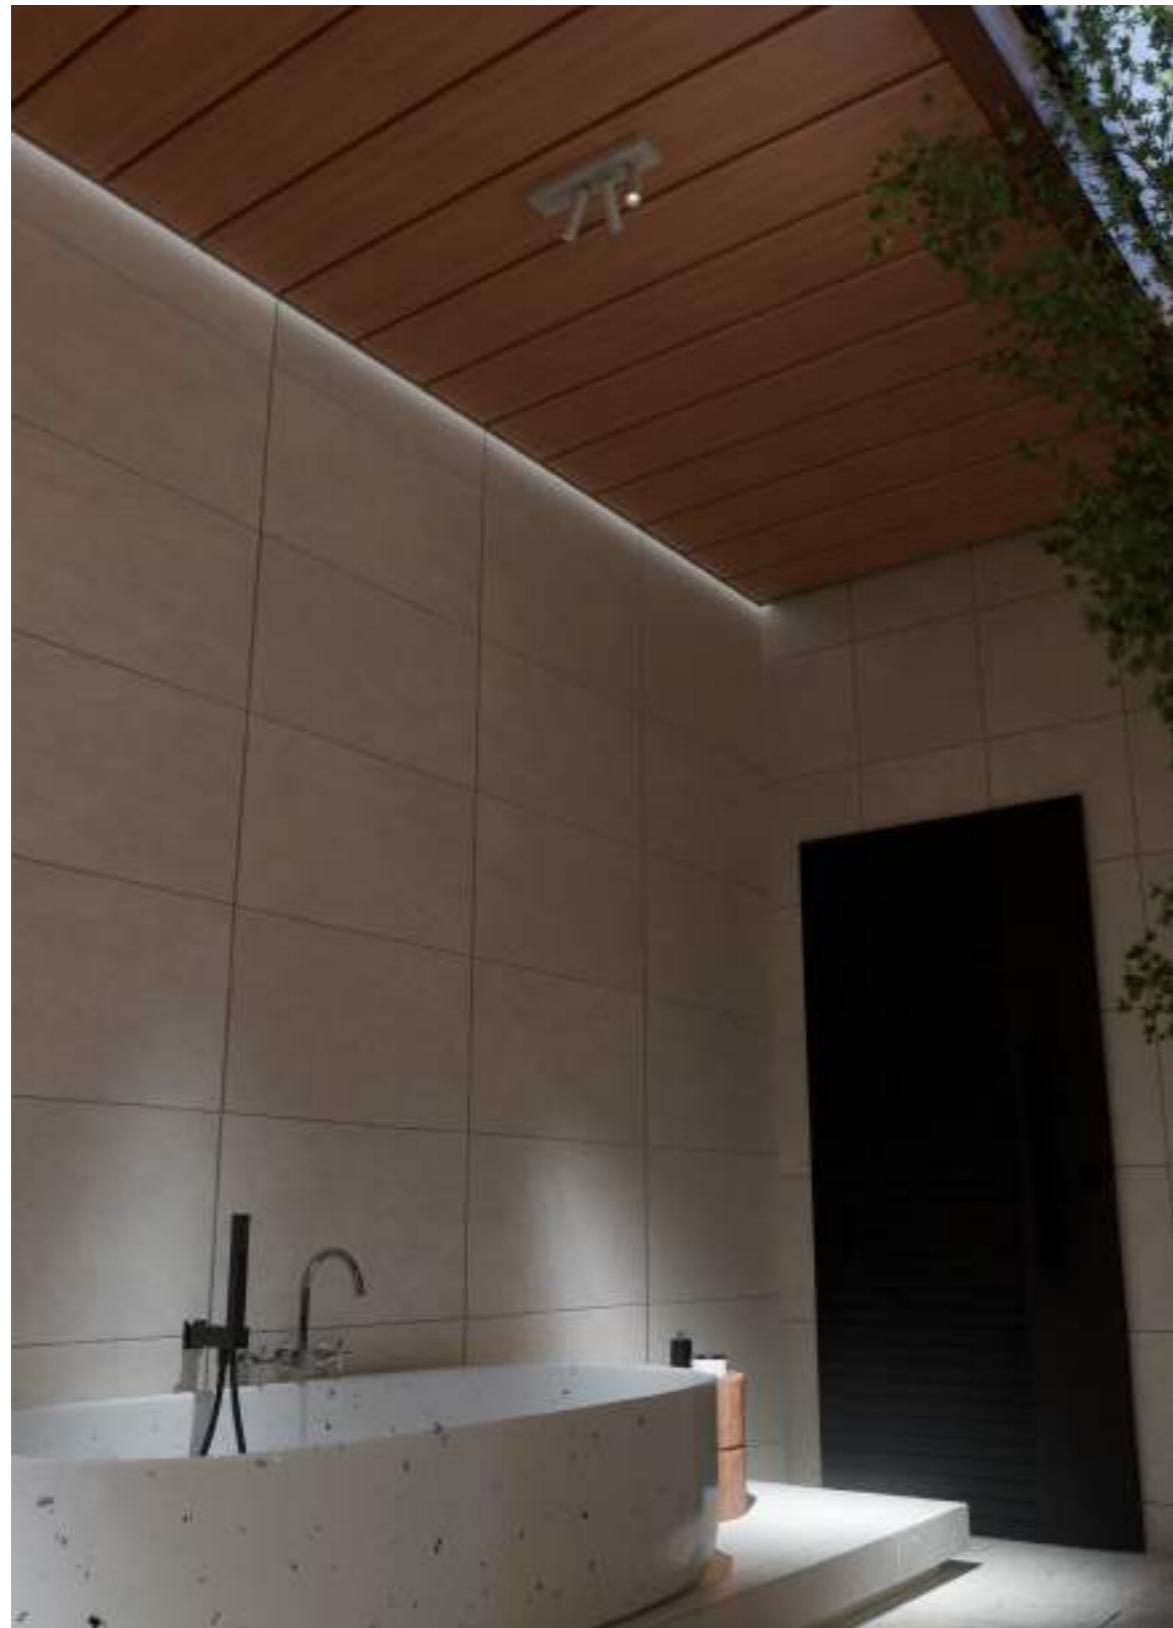

PM 33_on plate triple



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

Dimming Regulación

- NO-DRV
- DALI DT8

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
- Panal de abeja*

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2272.I2700710.x	3x7,8W	10°	95	2700K	3x545Lm	70Lm/W
2272.I2700715.x	3x7,8W	15°	95	2700K	3x545Lm	70Lm/W
2272.I2700724.x	3x7,8W	24°	95	2700K	3x545Lm	70Lm/W
2272.I2700736.x	3x7,8W	36°	95	2700K	3x545Lm	70Lm/W
2272.I2700750.x	3x7,8W	50°	95	2700K	3x545Lm	70Lm/W
2272.I3000710.x	3x7,8W	10°	95	3000K	3x573Lm	74Lm/W
2272.I3000715.x	3x7,8W	15°	95	3000K	3x573Lm	74Lm/W
2272.I3000724.x	3x7,8W	24°	95	3000K	3x573Lm	74Lm/W
2272.I3000736.x	3x7,8W	36°	95	3000K	3x573Lm	74Lm/W
2272.I3000750.x	3x7,8W	50°	95	3000K	3x573Lm	74Lm/W
2272.I4000710.x	3x7,8W	10°	95	4000K	3x629Lm	81Lm/W
2272.I4000715.x	3x7,8W	15°	95	4000K	3x629Lm	81Lm/W
2272.I4000724.x	3x7,8W	24°	95	4000K	3x629Lm	81Lm/W
2272.I4000736.x	3x7,8W	36°	95	4000K	3x629Lm	81Lm/W
2272.I4000750.x	3x7,8W	50°	95	4000K	3x629Lm	81Lm/W

Tunable White


2243.TWB00515.x	3x6,2W	15°	90	1800-4000K	3x275-450Lm	45-73Lm/W
2243.TWB00524.x	3x6,2W	24°	90	1800-4000K	3x275-450Lm	45-73Lm/W
2243.TWB00536.x	3x6,2W	36°	90	1800-4000K	3x275-450Lm	45-73Lm/W
2243.TWB00550.x	3x6,2W	50°	90	1800-4000K	3x275-450Lm	45-73Lm/W

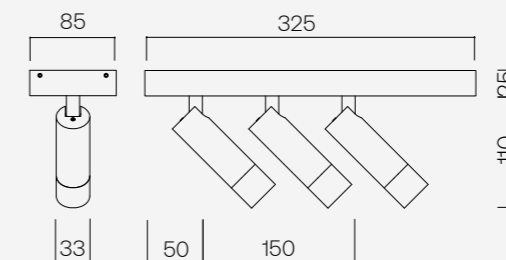

PM 37-250_p on



PM 37-250_p on



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- COB LUMINUS
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
- *Panal de abeja*

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
8925.I2700710.x	7,8W	10°	95	2700K	545Lm	70Lm/W
8925.I2700715.x	7,8W	15°	95	2700K	545Lm	70Lm/W
8925.I2700724.x	7,8W	24°	95	2700K	545Lm	70Lm/W
8925.I2700736.x	7,8W	36°	95	2700K	545Lm	70Lm/W
8925.I2700750.x	7,8W	50°	95	2700K	545Lm	70Lm/W
8925.I3000710.x	7,8W	10°	95	3000K	573Lm	74Lm/W
8925.I3000715.x	7,8W	15°	95	3000K	573Lm	74Lm/W
8925.I3000724.x	7,8W	24°	95	3000K	573Lm	74Lm/W
8925.I3000736.x	7,8W	36°	95	3000K	573Lm	74Lm/W
8925.I3000750.x	7,8W	50°	95	3000K	573Lm	74Lm/W
8925.I4000710.x	7,8W	10°	95	4000K	629Lm	81Lm/W
8925.I4000715.x	7,8W	15°	95	4000K	629Lm	81Lm/W
8925.I4000724.x	7,8W	24°	95	4000K	629Lm	81Lm/W
8925.I4000736.x	7,8W	36°	95	4000K	629Lm	81Lm/W
8925.I4000750.x	7,8W	50°	95	4000K	629Lm	81Lm/W



Ask for recessed base.
Base de empotrar, consultar.

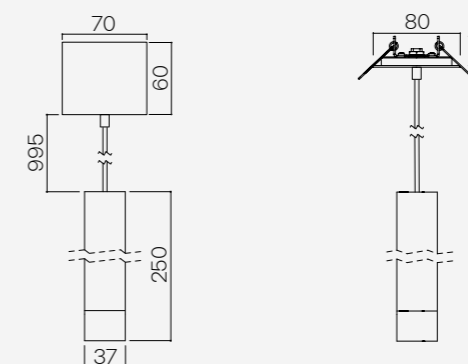

PM 37-500_p on



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- COB LUMINUS
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
- Panal de abeja

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
8950.I2700710.x	7,8W	10°	95	2700K	545Lm	70Lm/W
8950.I2700715.x	7,8W	15°	95	2700K	545Lm	70Lm/W
8950.I2700724.x	7,8W	24°	95	2700K	545Lm	70Lm/W
8950.I2700736.x	7,8W	36°	95	2700K	545Lm	70Lm/W
8950.I2700750.x	7,8W	50°	95	2700K	545Lm	70Lm/W
8950.I3000710.x	7,8W	10°	95	3000K	573Lm	74Lm/W
8950.I3000715.x	7,8W	15°	95	3000K	573Lm	74Lm/W
8950.I3000724.x	7,8W	24°	95	3000K	573Lm	74Lm/W
8950.I3000736.x	7,8W	36°	95	3000K	573Lm	74Lm/W
8950.I3000750.x	7,8W	50°	95	3000K	573Lm	74Lm/W
8950.I4000710.x	7,8W	10°	95	4000K	629Lm	81Lm/W
8950.I4000715.x	7,8W	15°	95	4000K	629Lm	81Lm/W
8950.I4000724.x	7,8W	24°	95	4000K	629Lm	81Lm/W
8950.I4000736.x	7,8W	36°	95	4000K	629Lm	81Lm/W
8950.I4000750.x	7,8W	50°	95	4000K	629Lm	81Lm/W




Ask for recessed base.
Base de empotrar, consultar.

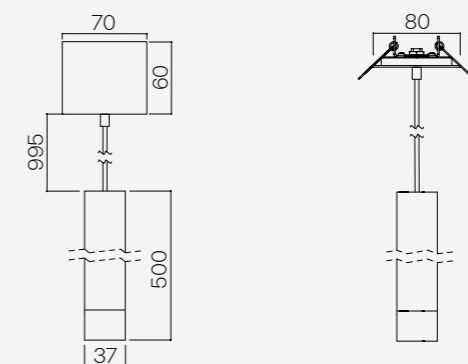

SOFT 33_in spot
by *eng*



SOFT 33_in spot



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

Dimming Regulación

- NO-DRV
- DALI DT8

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
- *Panal de abeja*

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2280.I2700710.x	7,8W	10°	95	2700K	545Lm	70Lm/W
2280.I2700715.x	7,8W	15°	95	2700K	545Lm	70Lm/W
2280.I2700724.x	7,8W	24°	95	2700K	545Lm	70Lm/W
2280.I2700736.x	7,8W	36°	95	2700K	545Lm	70Lm/W
2280.I2700750.x	7,8W	50°	95	2700K	545Lm	70Lm/W
2280.I3000710.x	7,8W	10°	95	3000K	573Lm	74Lm/W
2280.I3000715.x	7,8W	15°	95	3000K	573Lm	74Lm/W
2280.I3000724.x	7,8W	24°	95	3000K	573Lm	74Lm/W
2280.I3000736.x	7,8W	36°	95	3000K	573Lm	74Lm/W
2280.I3000750.x	7,8W	50°	95	3000K	573Lm	74Lm/W
2280.I4000710.x	7,8W	10°	95	4000K	629Lm	81Lm/W
2280.I4000715.x	7,8W	15°	95	4000K	629Lm	81Lm/W
2280.I4000724.x	7,8W	24°	95	4000K	629Lm	81Lm/W
2280.I4000736.x	7,8W	36°	95	4000K	629Lm	81Lm/W
2280.I4000750.x	7,8W	50°	95	4000K	629Lm	81Lm/W

Tunable White


2280.TWB00515.x	6,2W	15°	90	1800-4000K	275-450Lm	45-73Lm/W
2280.TWB00524.x	6,2W	24°	90	1800-4000K	275-450Lm	45-73Lm/W
2280.TWB00536.x	6,2W	36°	90	1800-4000K	275-450Lm	45-73Lm/W
2280.TWB00550.x	6,2W	50°	90	1800-4000K	275-450Lm	45-73Lm/W

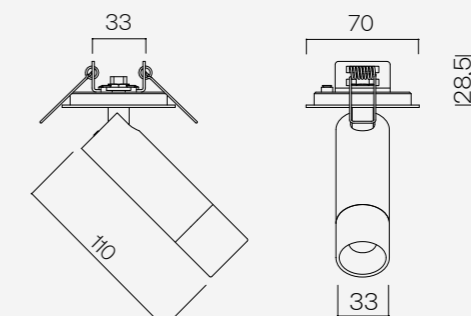

PM 46_in dl zoom
by *eng*



PM 46_in dl zoom



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

Dimming Regulación

- Driver not included
- DALI DT8

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2261.I27007ZM.x	7,8W	16-45°	95	2700K	436Lm	56Lm/W
2261.I30007ZM.x	7,8W	16-45°	95	3000K	459Lm	59Lm/W
2261.I40007ZM.x	7,8W	16-45°	95	4000K	504Lm	65Lm/W

Tunable White


2261.TWB005ZM.x	6,2W	16-45°	90	1800-4000K	-	-
-----------------	------	--------	----	------------	---	---



TORCH 53_in spot
by *eng*



TORCH 53_in spot



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

Dimming Regulación

- NO-DRV
- DALI DT8

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
- *Panal de abeja*

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2275.I2700710.x	7,8W	10°	95	2700K	545Lm	70Lm/W
2275.I2700715.x	7,8W	15°	95	2700K	545Lm	70Lm/W
2275.I2700724.x	7,8W	24°	95	2700K	545Lm	70Lm/W
2275.I2700736.x	7,8W	36°	95	2700K	545Lm	70Lm/W
2275.I2700750.x	7,8W	50°	95	2700K	545Lm	70Lm/W
2275.I3000710.x	7,8W	10°	95	3000K	573Lm	74Lm/W
2275.I3000715.x	7,8W	15°	95	3000K	573Lm	74Lm/W
2275.I3000724.x	7,8W	24°	95	3000K	573Lm	74Lm/W
2275.I3000736.x	7,8W	36°	95	3000K	573Lm	74Lm/W
2275.I3000750.x	7,8W	50°	95	3000K	573Lm	74Lm/W
2275.I4000710.x	7,8W	10°	95	4000K	629Lm	81Lm/W
2275.I4000715.x	7,8W	15°	95	4000K	629Lm	81Lm/W
2275.I4000724.x	7,8W	24°	95	4000K	629Lm	81Lm/W
2275.I4000736.x	7,8W	36°	95	4000K	629Lm	81Lm/W
2275.I4000750.x	7,8W	50°	95	4000K	629Lm	81Lm/W

Tunable White

2275.TWB00515.x	6,2W	15°	90	1800-4000K	275-450Lm	45-73Lm/W
2275.TWB00524.x	6,2W	24°	90	1800-4000K	275-450Lm	45-73Lm/W
2275.TWB00536.x	6,2W	36°	90	1800-4000K	275-450Lm	45-73Lm/W
2275.TWB00550.x	6,2W	50°	90	1800-4000K	275-450Lm	45-73Lm/W

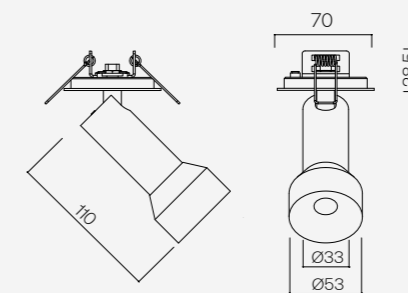

PM 55

by *eng*



The PM 55 model offers several lighting options; for accent lighting as well as general lighting. Its stylish and attractive design is ideal for any type of space.

El modelo PM 55 nos ofrece múltiples opciones de iluminación; tanto de acento como iluminación general. Su atractivo diseño de cuidadas líneas es ideal para cualquier tipo de espacio.



Recessed

in dl p. 96 in dl- p. 100 in dl+ p. 102 in dl+ tl p. 106

in spot p. 108 + in spot p. 112

Surface

+ on spot p. 116 on plate double p. 120 on plate triple p. 124

Magnetic

trk mag p. 128 + trk mag p. 130


Tracklight

+ trk 230v p. 132

PM 55_in dl



PM 55_in dl



Luminary

- Luminária
- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panel de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R



Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2209.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
2209.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
2209.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
2209.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
2209.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
2209.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
2209.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
2209.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
2209.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
2209.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
2209.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
2209.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
2209.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
2209.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
2209.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
2209.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
2209.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
2209.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W



PM 55_in dl-



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panel de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2211.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
2211.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
2211.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
2211.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
2211.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
2211.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
2211.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
2211.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
2211.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
2211.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
2211.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
2211.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
2211.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
2211.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
2211.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
2211.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
2211.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
2211.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

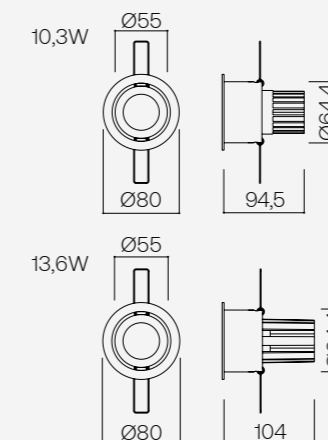

PM 55_in dl+



PM 55_in dl+



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panel de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2230.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
2230.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
2230.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
2230.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
2230.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
2230.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
2230.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
2230.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
2230.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
2230.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
2230.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
2230.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
2230.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
2230.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
2230.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
2230.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
2230.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
2230.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W



PM 55_in dl+ tl



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panel de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2062.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
2062.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
2062.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
2062.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
2062.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
2062.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
2062.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
2062.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
2062.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
2062.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
2062.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
2062.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
2062.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
2062.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
2062.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
2062.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
2062.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
2062.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W



PM 55_in spot



PM 55_in spot



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panel de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2204.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
2204.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
2204.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
2204.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
2204.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
2204.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
2204.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
2204.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
2204.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
2204.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
2204.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
2204.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
2204.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
2204.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
2204.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
2204.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
2204.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
2204.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

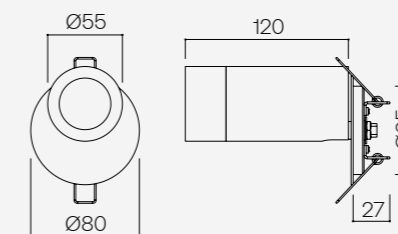

PM 55+_in spot

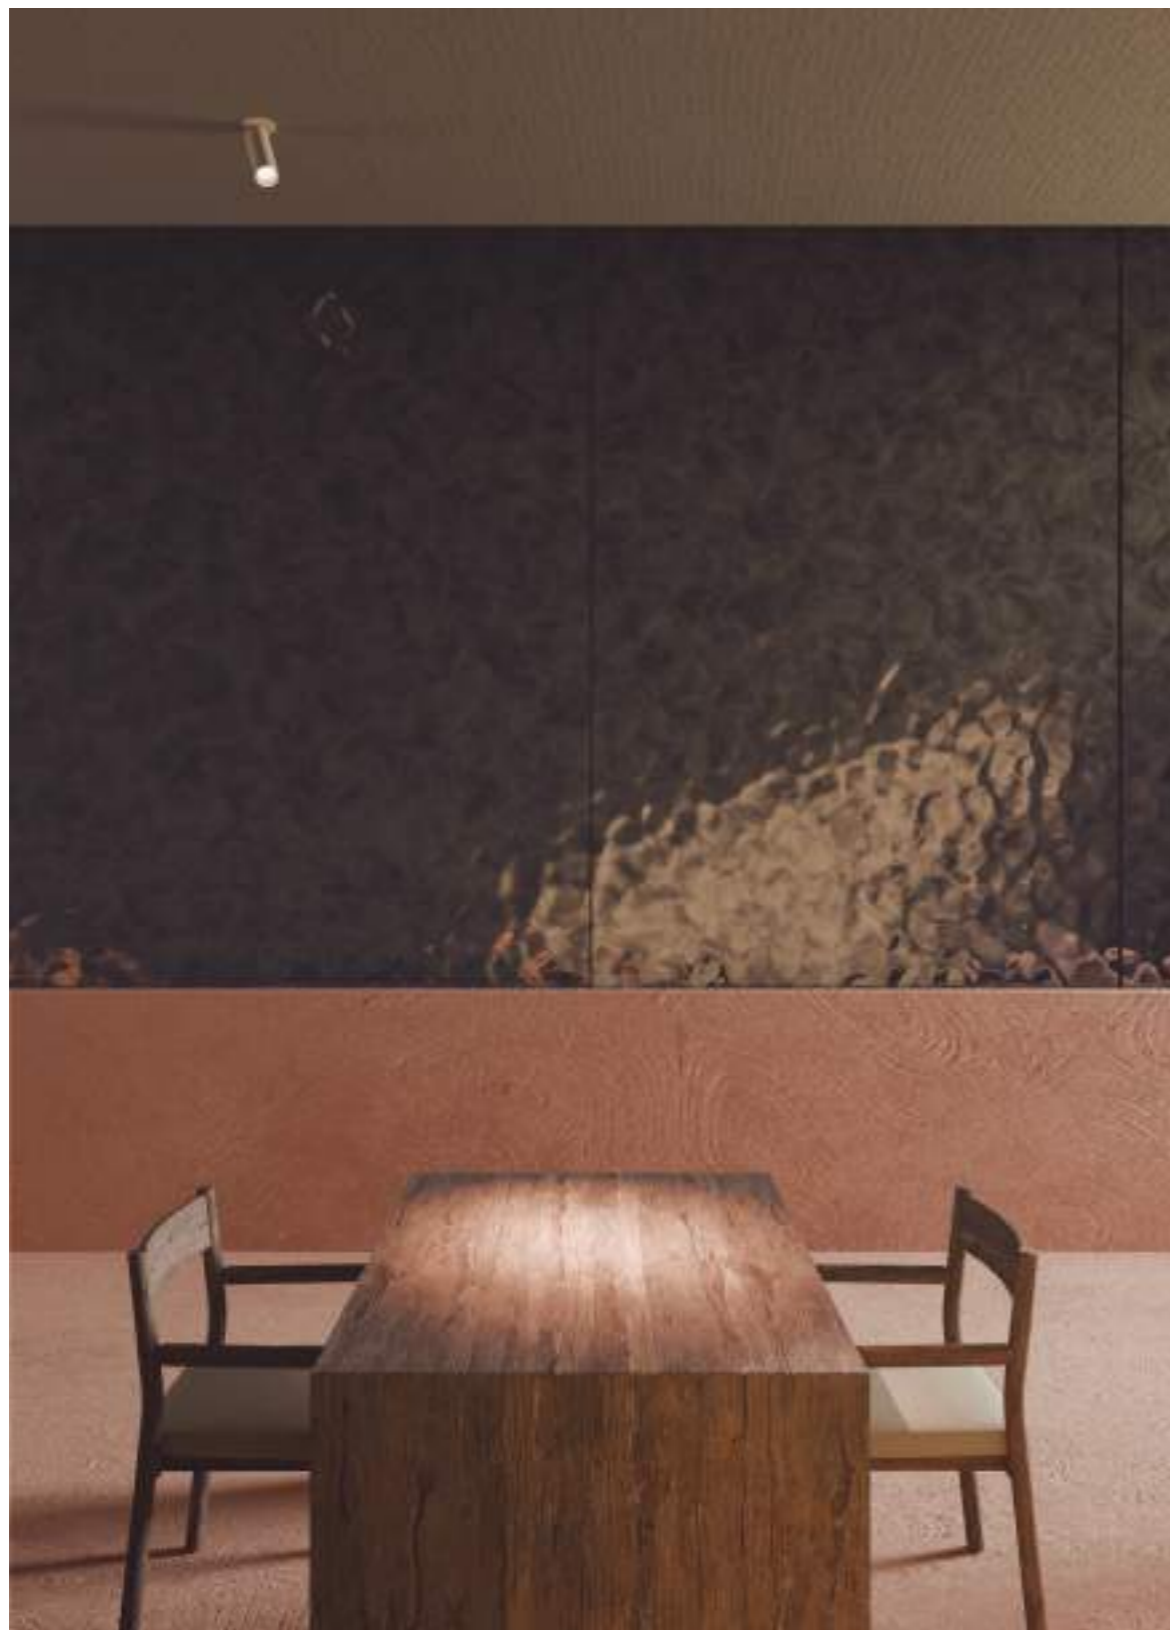

PM 55+_in spot



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panel de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2231.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
2231.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
2231.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
2231.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
2231.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
2231.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
2231.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
2231.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
2231.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
2231.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
2231.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
2231.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
2231.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
2231.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
2231.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
2231.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
2231.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
2231.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

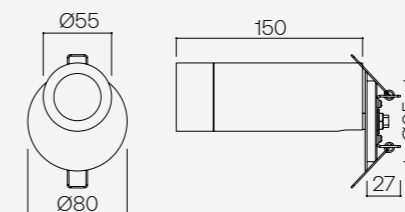

PM 55+_on spot

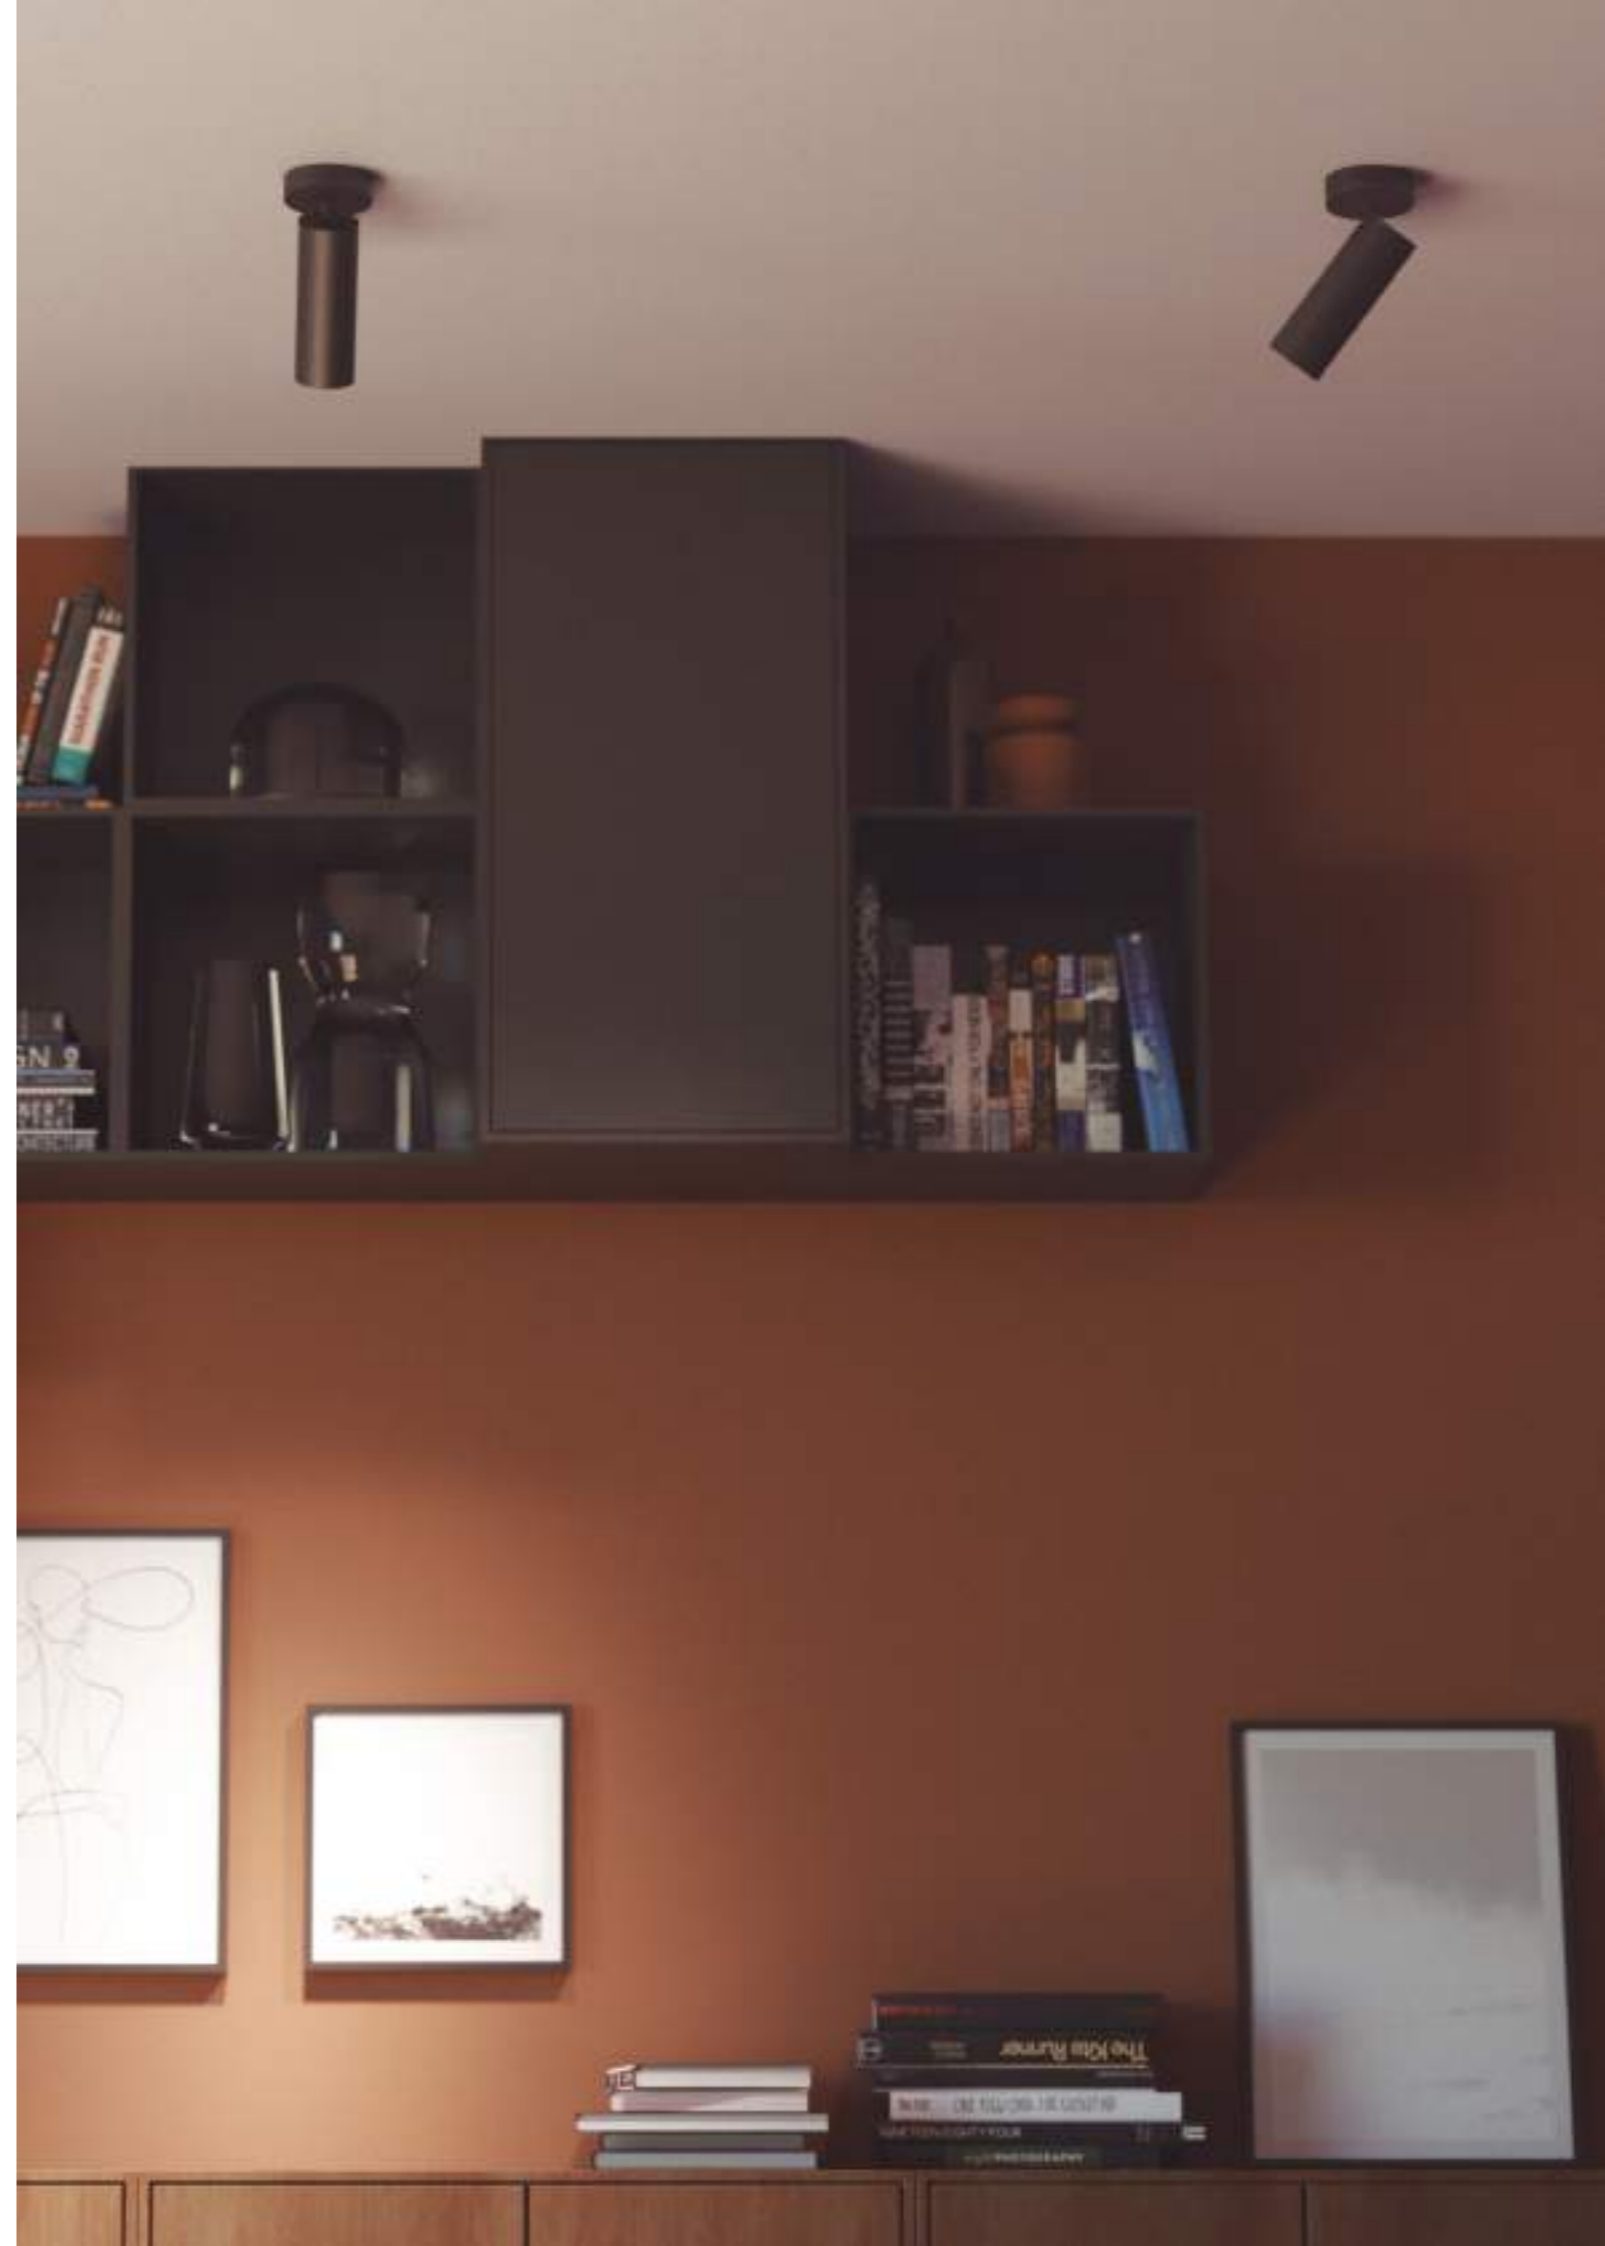

PM 55+_on spot



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2229.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
2229.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
2229.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
2229.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
2229.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
2229.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
2229.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
2229.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
2229.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
2229.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
2229.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
2229.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
2229.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
2229.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
2229.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
2229.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
2229.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
2229.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

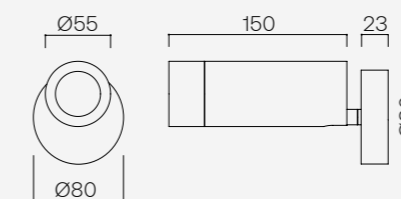

PM 55_on plate double

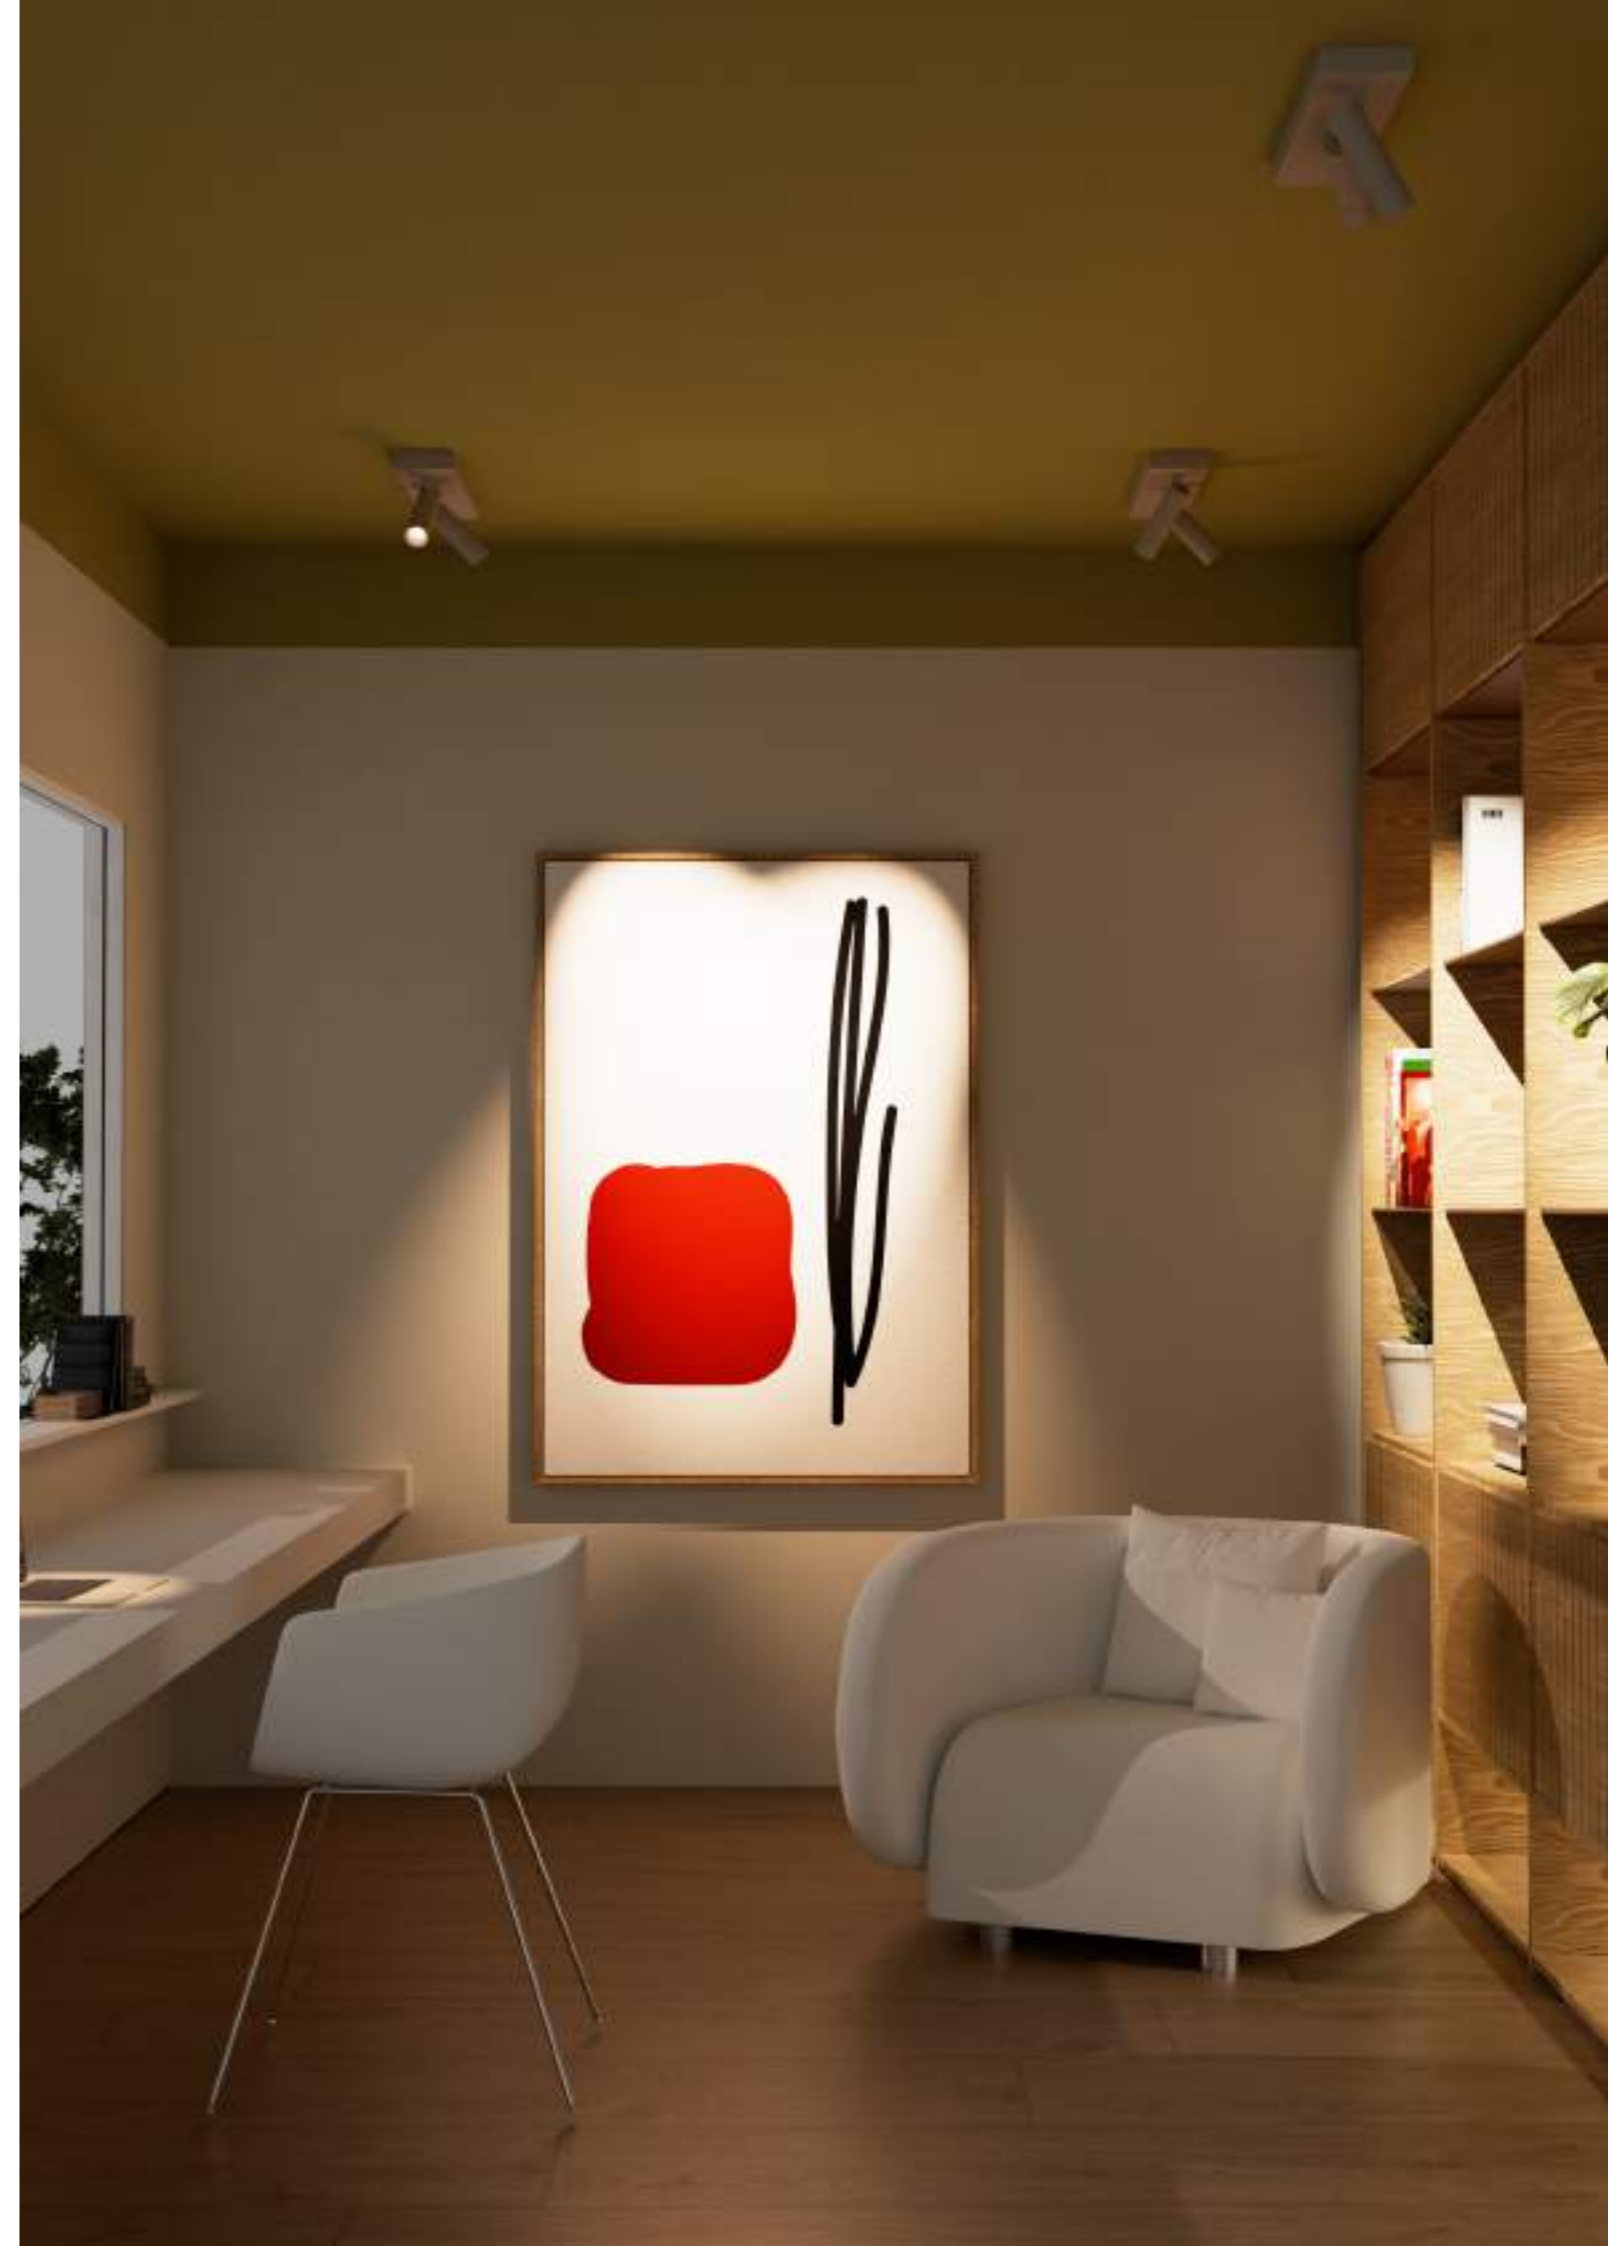

PM 55_on plate double



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Integrated - Integrado

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2225.92700920.x	2x10,3W	20°	90	2700K	2x683Lm	67Lm/W
2225.92700940.x	2x10,3W	40°	90	2700K	2x683Lm	67Lm/W
2225.92700960.x	2x10,3W	60°	90	2700K	2x683Lm	67Lm/W
2225.93000920.x	2x10,3W	20°	90	3000K	2x779Lm	76Lm/W
2225.93000940.x	2x10,3W	40°	90	3000K	2x779Lm	76Lm/W
2225.93000960.x	2x10,3W	60°	90	3000K	2x779Lm	76Lm/W
2225.94000920.x	2x10,3W	20°	90	4000K	2x870Lm	85Lm/W
2225.94000940.x	2x10,3W	40°	90	4000K	2x870Lm	85Lm/W
2225.94000960.x	2x10,3W	60°	90	4000K	2x870Lm	85Lm/W
2225.92701225.x	2x13,6W	25°	90	2700K	2x1080Lm	80Lm/W
2225.92701243.x	2x13,6W	43°	90	2700K	2x1080Lm	80Lm/W
2225.92701260.x	2x13,6W	60°	90	2700K	2x1080Lm	80Lm/W
2225.93001225.x	2x13,6W	25°	90	3000K	2x1217Lm	90Lm/W
2225.93001243.x	2x13,6W	43°	90	3000K	2x1217Lm	90Lm/W
2225.93001260.x	2x13,6W	60°	90	3000K	2x1217Lm	90Lm/W
2225.94001225.x	2x13,6W	25°	90	4000K	2x1318Lm	97Lm/W
2225.94001243.x	2x13,6W	43°	90	4000K	2x1318Lm	97Lm/W
2225.94001260.x	2x13,6W	60°	90	4000K	2x1318Lm	97Lm/W

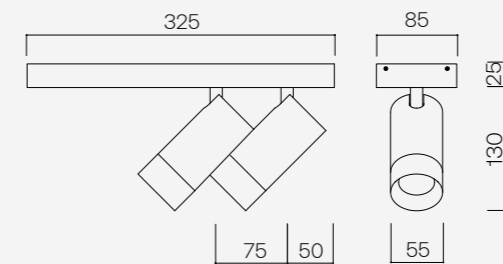

PM 55_on plate triple



PM 55_on plate triple



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R



Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2226.92700920.x	3x10,3W	20°	90	2700K	3x683Lm	67Lm/W
2226.92700940.x	3x10,3W	40°	90	2700K	3x683Lm	67Lm/W
2226.92700960.x	3x10,3W	60°	90	2700K	3x683Lm	67Lm/W
2226.93000920.x	3x10,3W	20°	90	3000K	3x779Lm	76Lm/W
2226.93000940.x	3x10,3W	40°	90	3000K	3x779Lm	76Lm/W
2226.93000960.x	3x10,3W	60°	90	3000K	3x779Lm	76Lm/W
2226.94000920.x	3x10,3W	20°	90	4000K	3x870Lm	85Lm/W
2226.94000940.x	3x10,3W	40°	90	4000K	3x870Lm	85Lm/W
2226.94000960.x	3x10,3W	60°	90	4000K	3x870Lm	85Lm/W
2226.92701225.x	3x13,6W	25°	90	2700K	3x1080Lm	80Lm/W
2226.92701243.x	3x13,6W	43°	90	2700K	3x1080Lm	80Lm/W
2226.92701260.x	3x13,6W	60°	90	2700K	3x1080Lm	80Lm/W
2226.93001225.x	3x13,6W	25°	90	3000K	3x1217Lm	90Lm/W
2226.93001243.x	3x13,6W	43°	90	3000K	3x1217Lm	90Lm/W
2226.93001260.x	3x13,6W	60°	90	3000K	3x1217Lm	90Lm/W
2226.94001225.x	3x13,6W	25°	90	4000K	3x1318Lm	97Lm/W
2226.94001243.x	3x13,6W	43°	90	4000K	3x1318Lm	97Lm/W
2226.94001260.x	3x13,6W	60°	90	4000K	3x1318Lm	97Lm/W

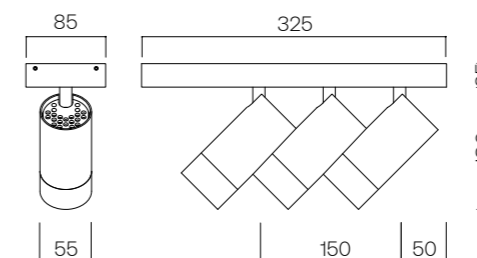

PM 55_trk mag



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Profile Carril

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
6203.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
6203.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
6203.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
6203.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
6203.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
6203.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
6203.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
6203.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
6203.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
6203.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
6203.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
6203.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
6203.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
6203.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
6203.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
6203.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
6203.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
6203.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

Downloads Descargas

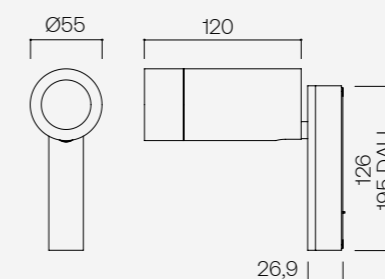

PM 55+_trk mag



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Profile Carril

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
6208.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
6208.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
6208.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
6208.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
6208.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
6208.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
6208.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
6208.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
6208.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
6208.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
6208.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
6208.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
6208.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
6208.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
6208.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
6208.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
6208.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
6208.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

Downloads Descargas

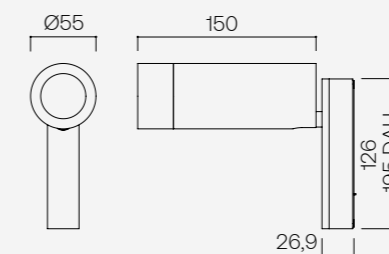

PM 55+_trk 230V



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb
Panal de abeja
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Profile Carril

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
6209.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
6209.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
6209.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
6209.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
6209.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
6209.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
6209.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
6209.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
6209.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
6209.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
6209.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
6209.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
6209.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
6209.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
6209.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
6209.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
6209.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
6209.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

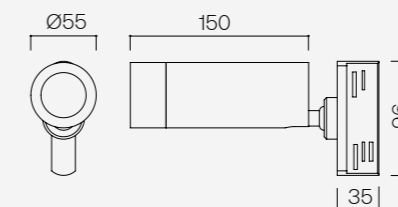

PM 70

by *eng*



Recessed

in spot p. 136

Surface

on fix p. 140 on slim p. 144

Pendant


p on p. 148

Inspired by the AR70, the PM70 model brings us high quality lighting combined with an exclusive and delicate design.


Inspirado en la AR70, el modelo PM 70 nos aporta una iluminación de gran calidad unido a un exclusivo y delicado diseño.



PM 70_in spot

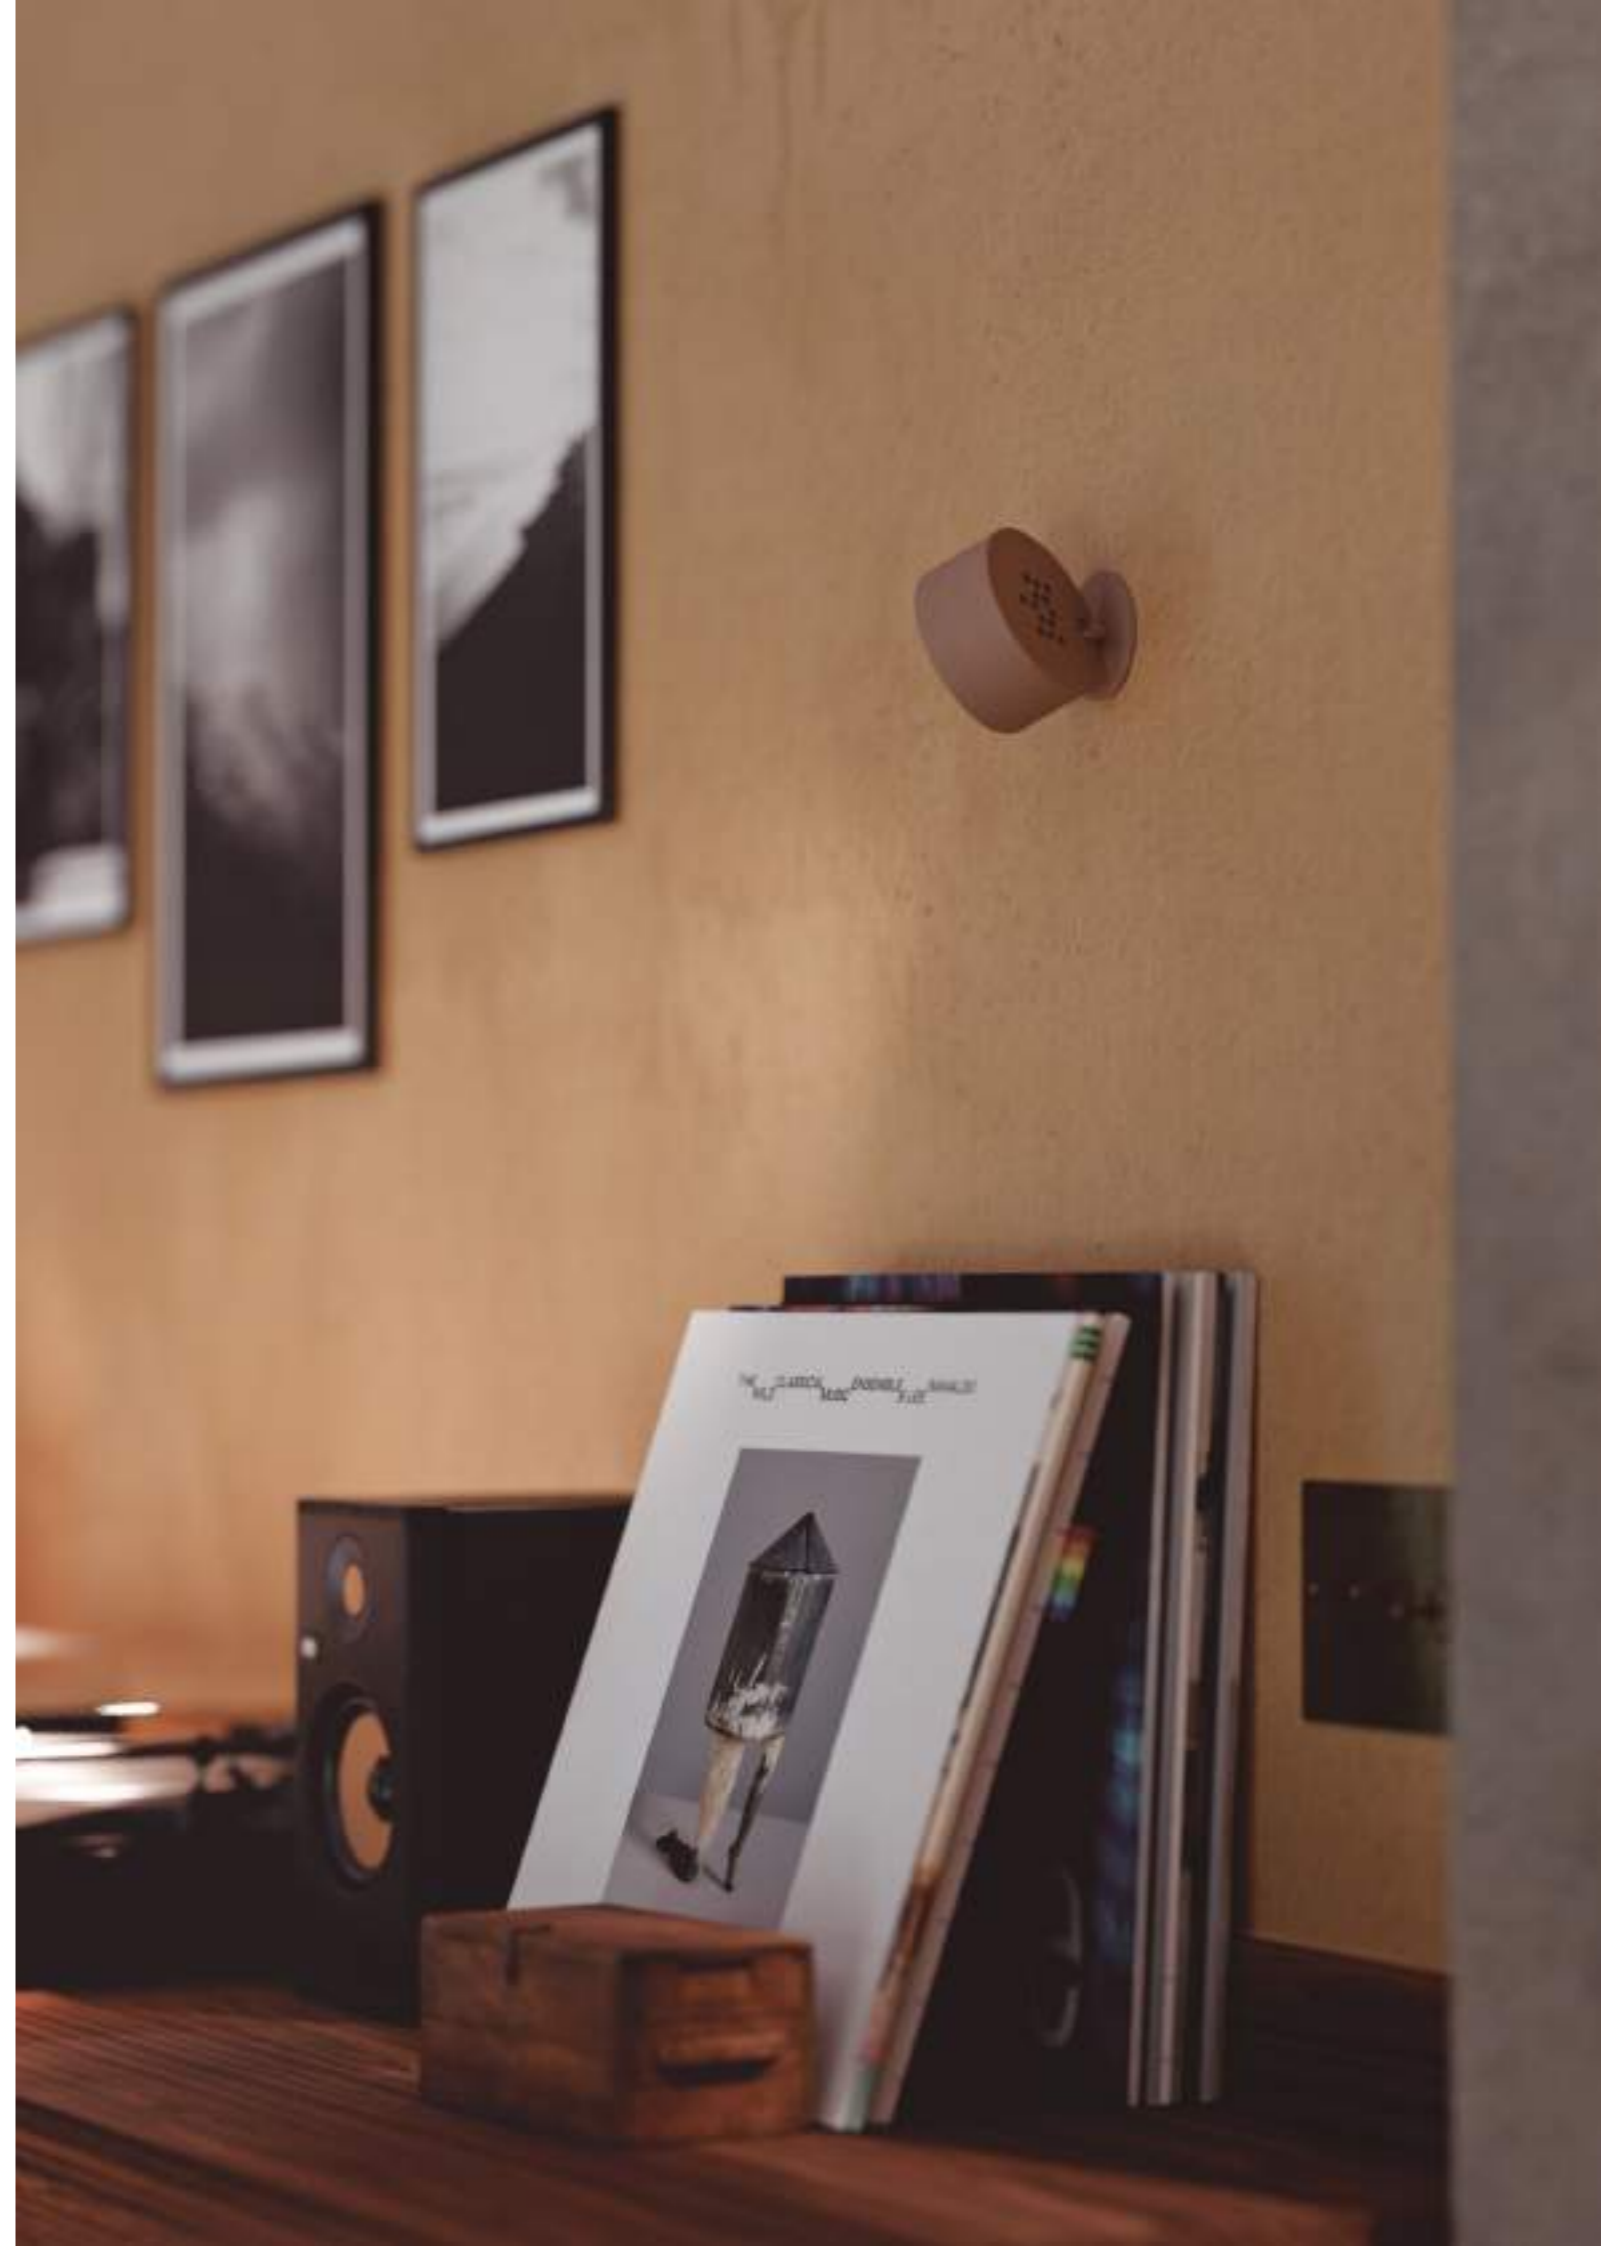

PM 70_in spot



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB CITIZEN
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2249.927007HA.x	8,2W	HC15°	90	2700K	594Lm	73Lm/W
2249.927007HC.x	8,2W	HC36°	90	2700K	594Lm	73Lm/W
2249.930007HA.x	8,2W	HC15°	90	3000K	638Lm	78Lm/W
2249.930007HC.x	8,2W	HC36°	90	3000K	638Lm	78Lm/W
2249.940007HA.x	8,2W	HC15°	90	4000K	688Lm	84Lm/W
2249.940007HC.x	8,2W	HC36°	90	4000K	688Lm	84Lm/W

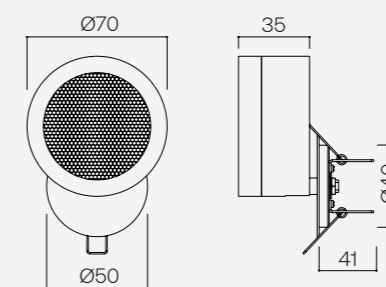

PM 70_on fix



PM 70_on fix



Luminary

- Luminária**
- L70 > 35000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- DOB VOSSLOH-SCHWABE
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2247.92700536.x	6W	36°	90	2700K	383Lm	64Lm/W
2247.93000536.x	6W	36°	90	3000K	417Lm	70Lm/W



PM 70_on slim

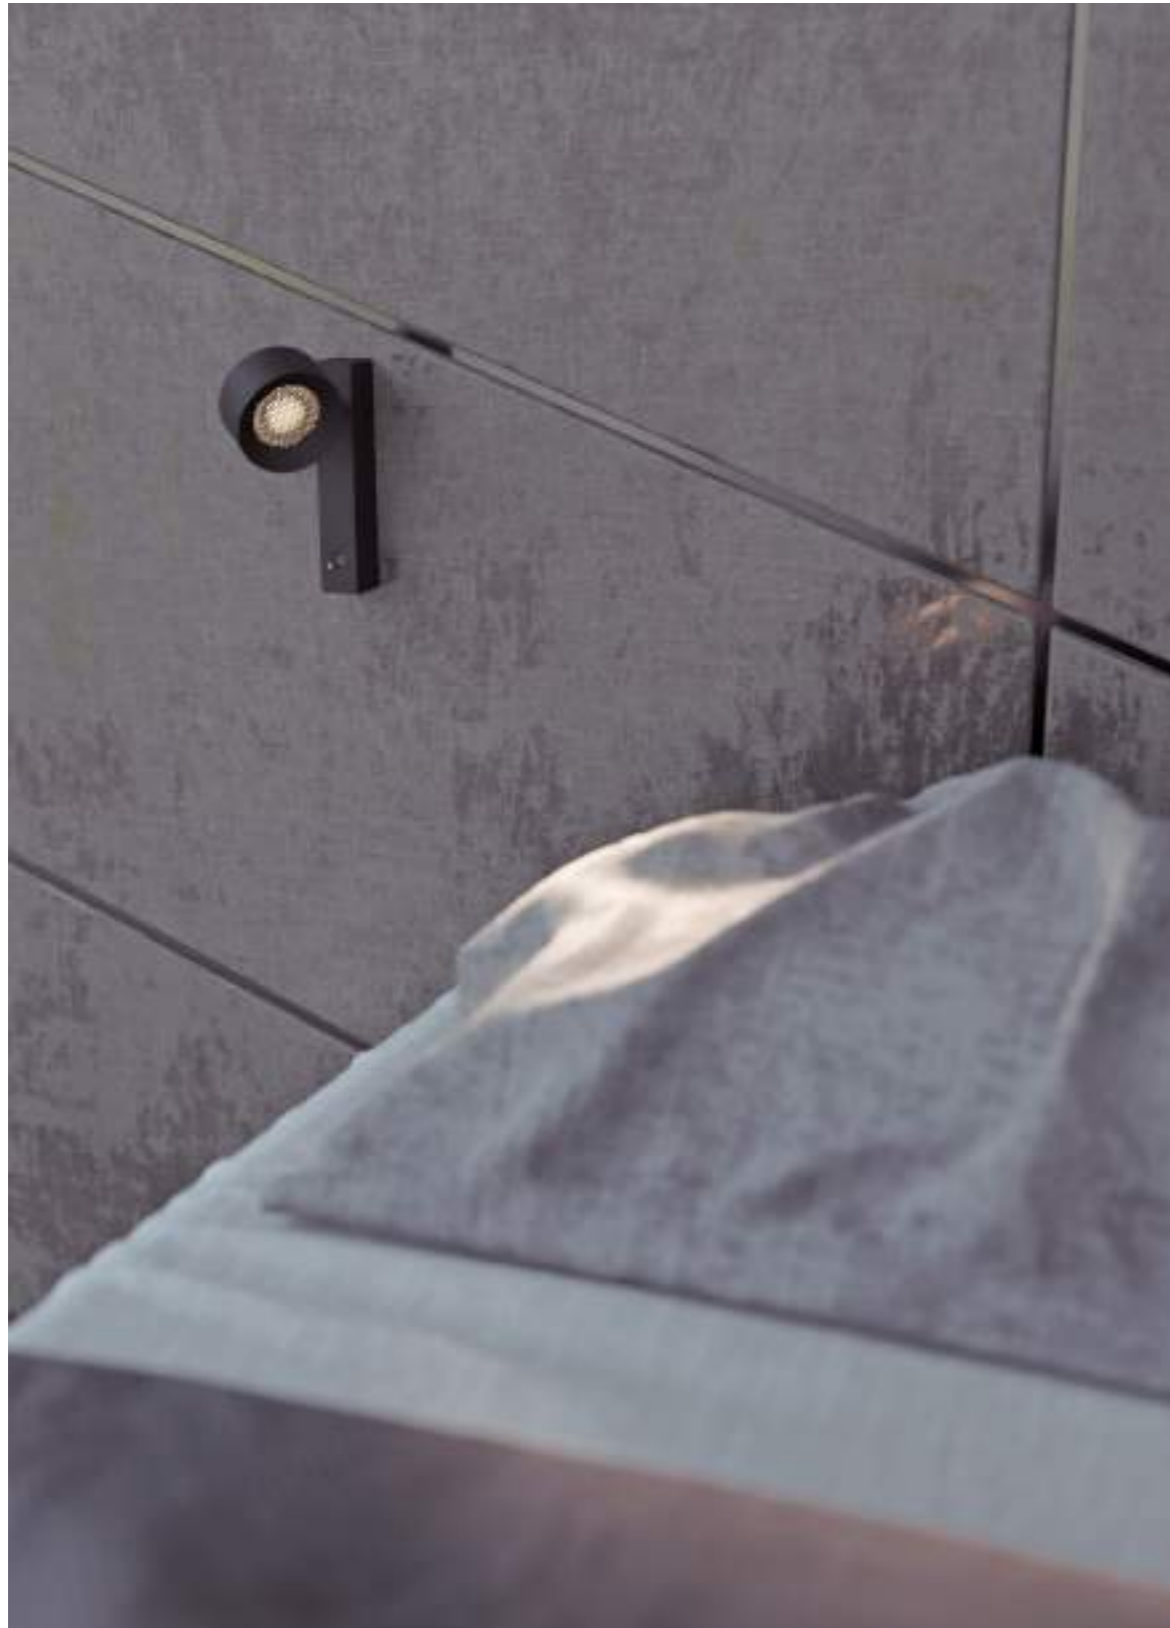

PM 70_on slim



Ask for option with switch
Consultar opción con interruptor



Luminary

- Luminária**
- L70 > 35000h
 - MacAdam 3

LED/Optic Óptica

- COB CITIZEN
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panel de abeja (incluido)
- With switch
Con interruptor

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas





Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2258.927005HC.x	6W	HC36°	90	2700K	475Lm	77Lm/W
2258.927005HA.x	6W	HC15°	90	2700K	475Lm	77Lm/W
2258.930005HC.x	6W	HC36°	90	3000K	510Lm	83Lm/W
2258.930005HA.x	6W	HC15°	90	3000K	510Lm	83Lm/W
2258.940005HC.x	6W	HC36°	90	4000K	550Lm	89Lm/W
2258.940005HA.x	6W	HC15°	90	4000K	550Lm	89Lm/W



PM 70_p on



PM 70_p on

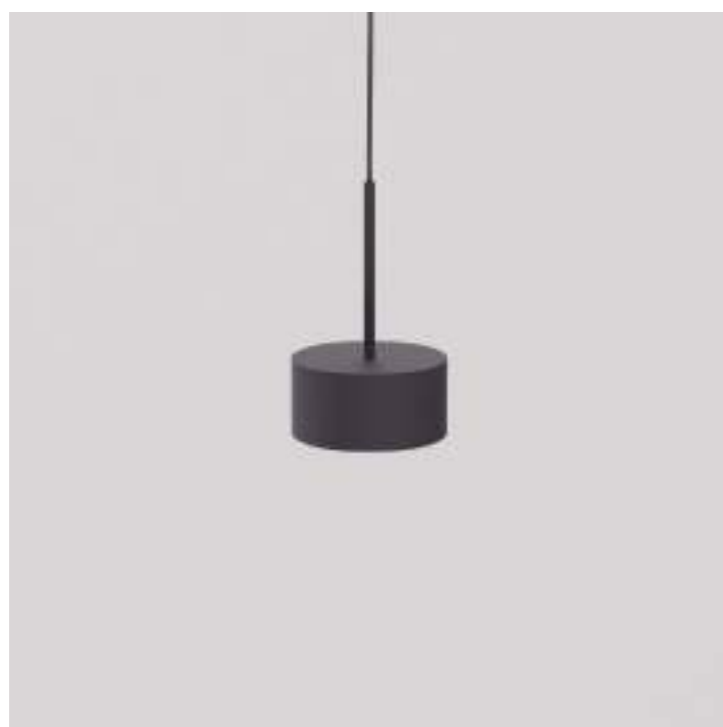

Luminary

- Luminária**
- L70 > 35000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- COB CITIZEN
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2257.927007HA.x	8,2W	HC15°	90	2700K	594Lm	73Lm/W
2257.927007HC.x	8,2W	HC36°	90	2700K	594Lm	73Lm/W
2257.930007HA.x	8,2W	HC15°	90	3000K	638Lm	78Lm/W
2257.930007HC.x	8,2W	HC36°	90	3000K	638Lm	78Lm/W
2257.940007HA.x	8,2W	HC15°	90	4000K	688Lm	84Lm/W
2257.940007HC.x	8,2W	HC36°	90	4000K	688Lm	84Lm/W



Ask for recessed base.
Base de empotrar, consultar.



PM 111

by *eng*



Our innovative design, based on the classic AR111, keeps the elegance and visual comfort of the original, with high luminous efficiency and low energy consumption.

Nuestro innovador diseño basado en la clásica AR111, conserva la elegancia y confort visual original, sumando una gran eficiencia lumínica y bajo consumo.



Recessed

in spot p. 154

Surface

on fix p. 158 on mov p. 162

Pendant

p on p. 166

Magnetic

trk mag p. 170

Track

trk 230v p. 174


Outdoor

baliza p. 266 on fix ip p. 276

PM 111_in spot



PM 111_in spot



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
- *Panal de abeja (incluido)*

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2227.927018HA.x	20,7W	HC15°	90	2700K	1464Lm	71Lm/W
2227.927018HC.x	20,7W	HC36°	90	2700K	1464Lm	71Lm/W
2227.930018HA.x	20,7W	HC15°	90	3000K	1579Lm	77Lm/W
2227.930018HC.x	20,7W	HC36°	90	3000K	1579Lm	77Lm/W
2227.940018HA.x	20,7W	HC15°	90	4000K	1698Lm	82Lm/W
2227.940018HC.x	20,7W	HC36°	90	4000K	1698Lm	82Lm/W

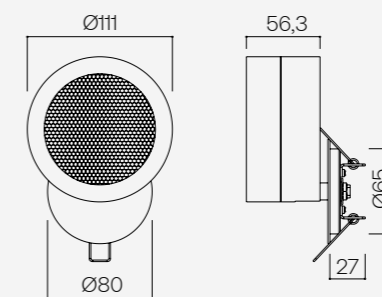

PM 111_on fix

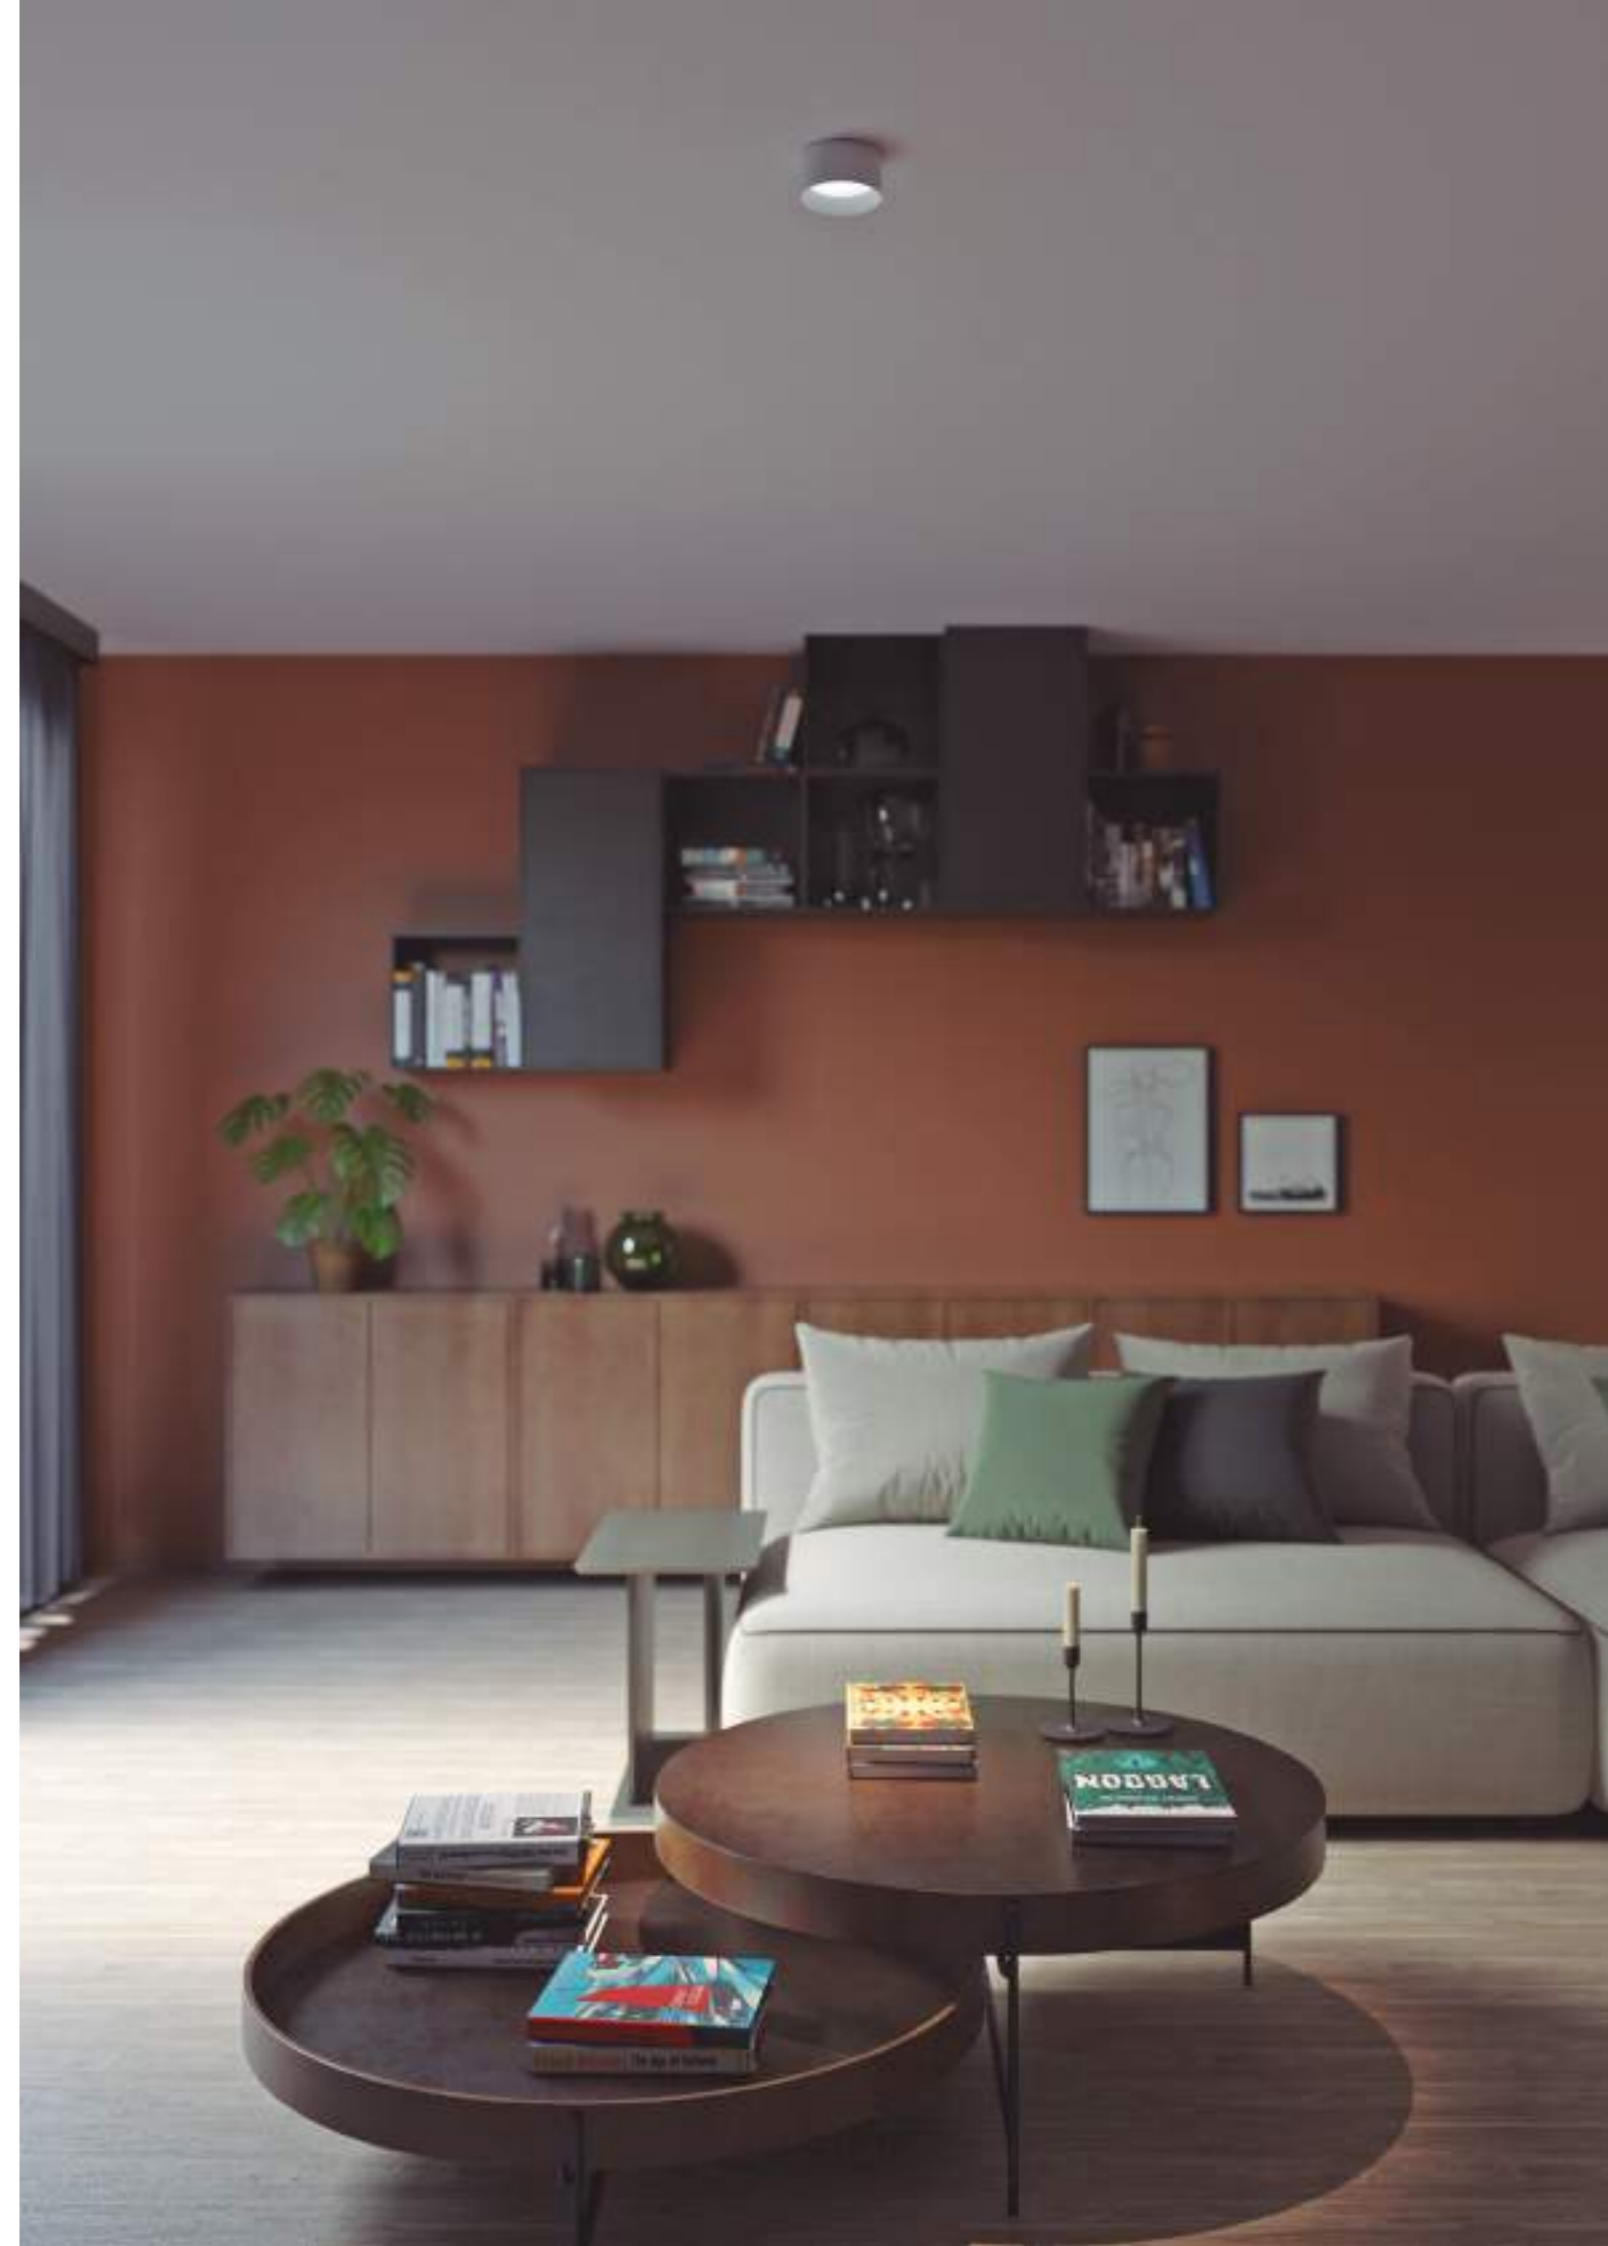

PM 111_on fix



Luminary

- Luminária**
- L70 > 35000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- DOB VOSSLOH-SCHWABE
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2232.92701336.x	15W	36°	90	2700K	1020Lm	68Lm/W
2232.93001336.x	15W	36°	90	3000K	1084Lm	73Lm/W




PM 111_on mov

by Her design team

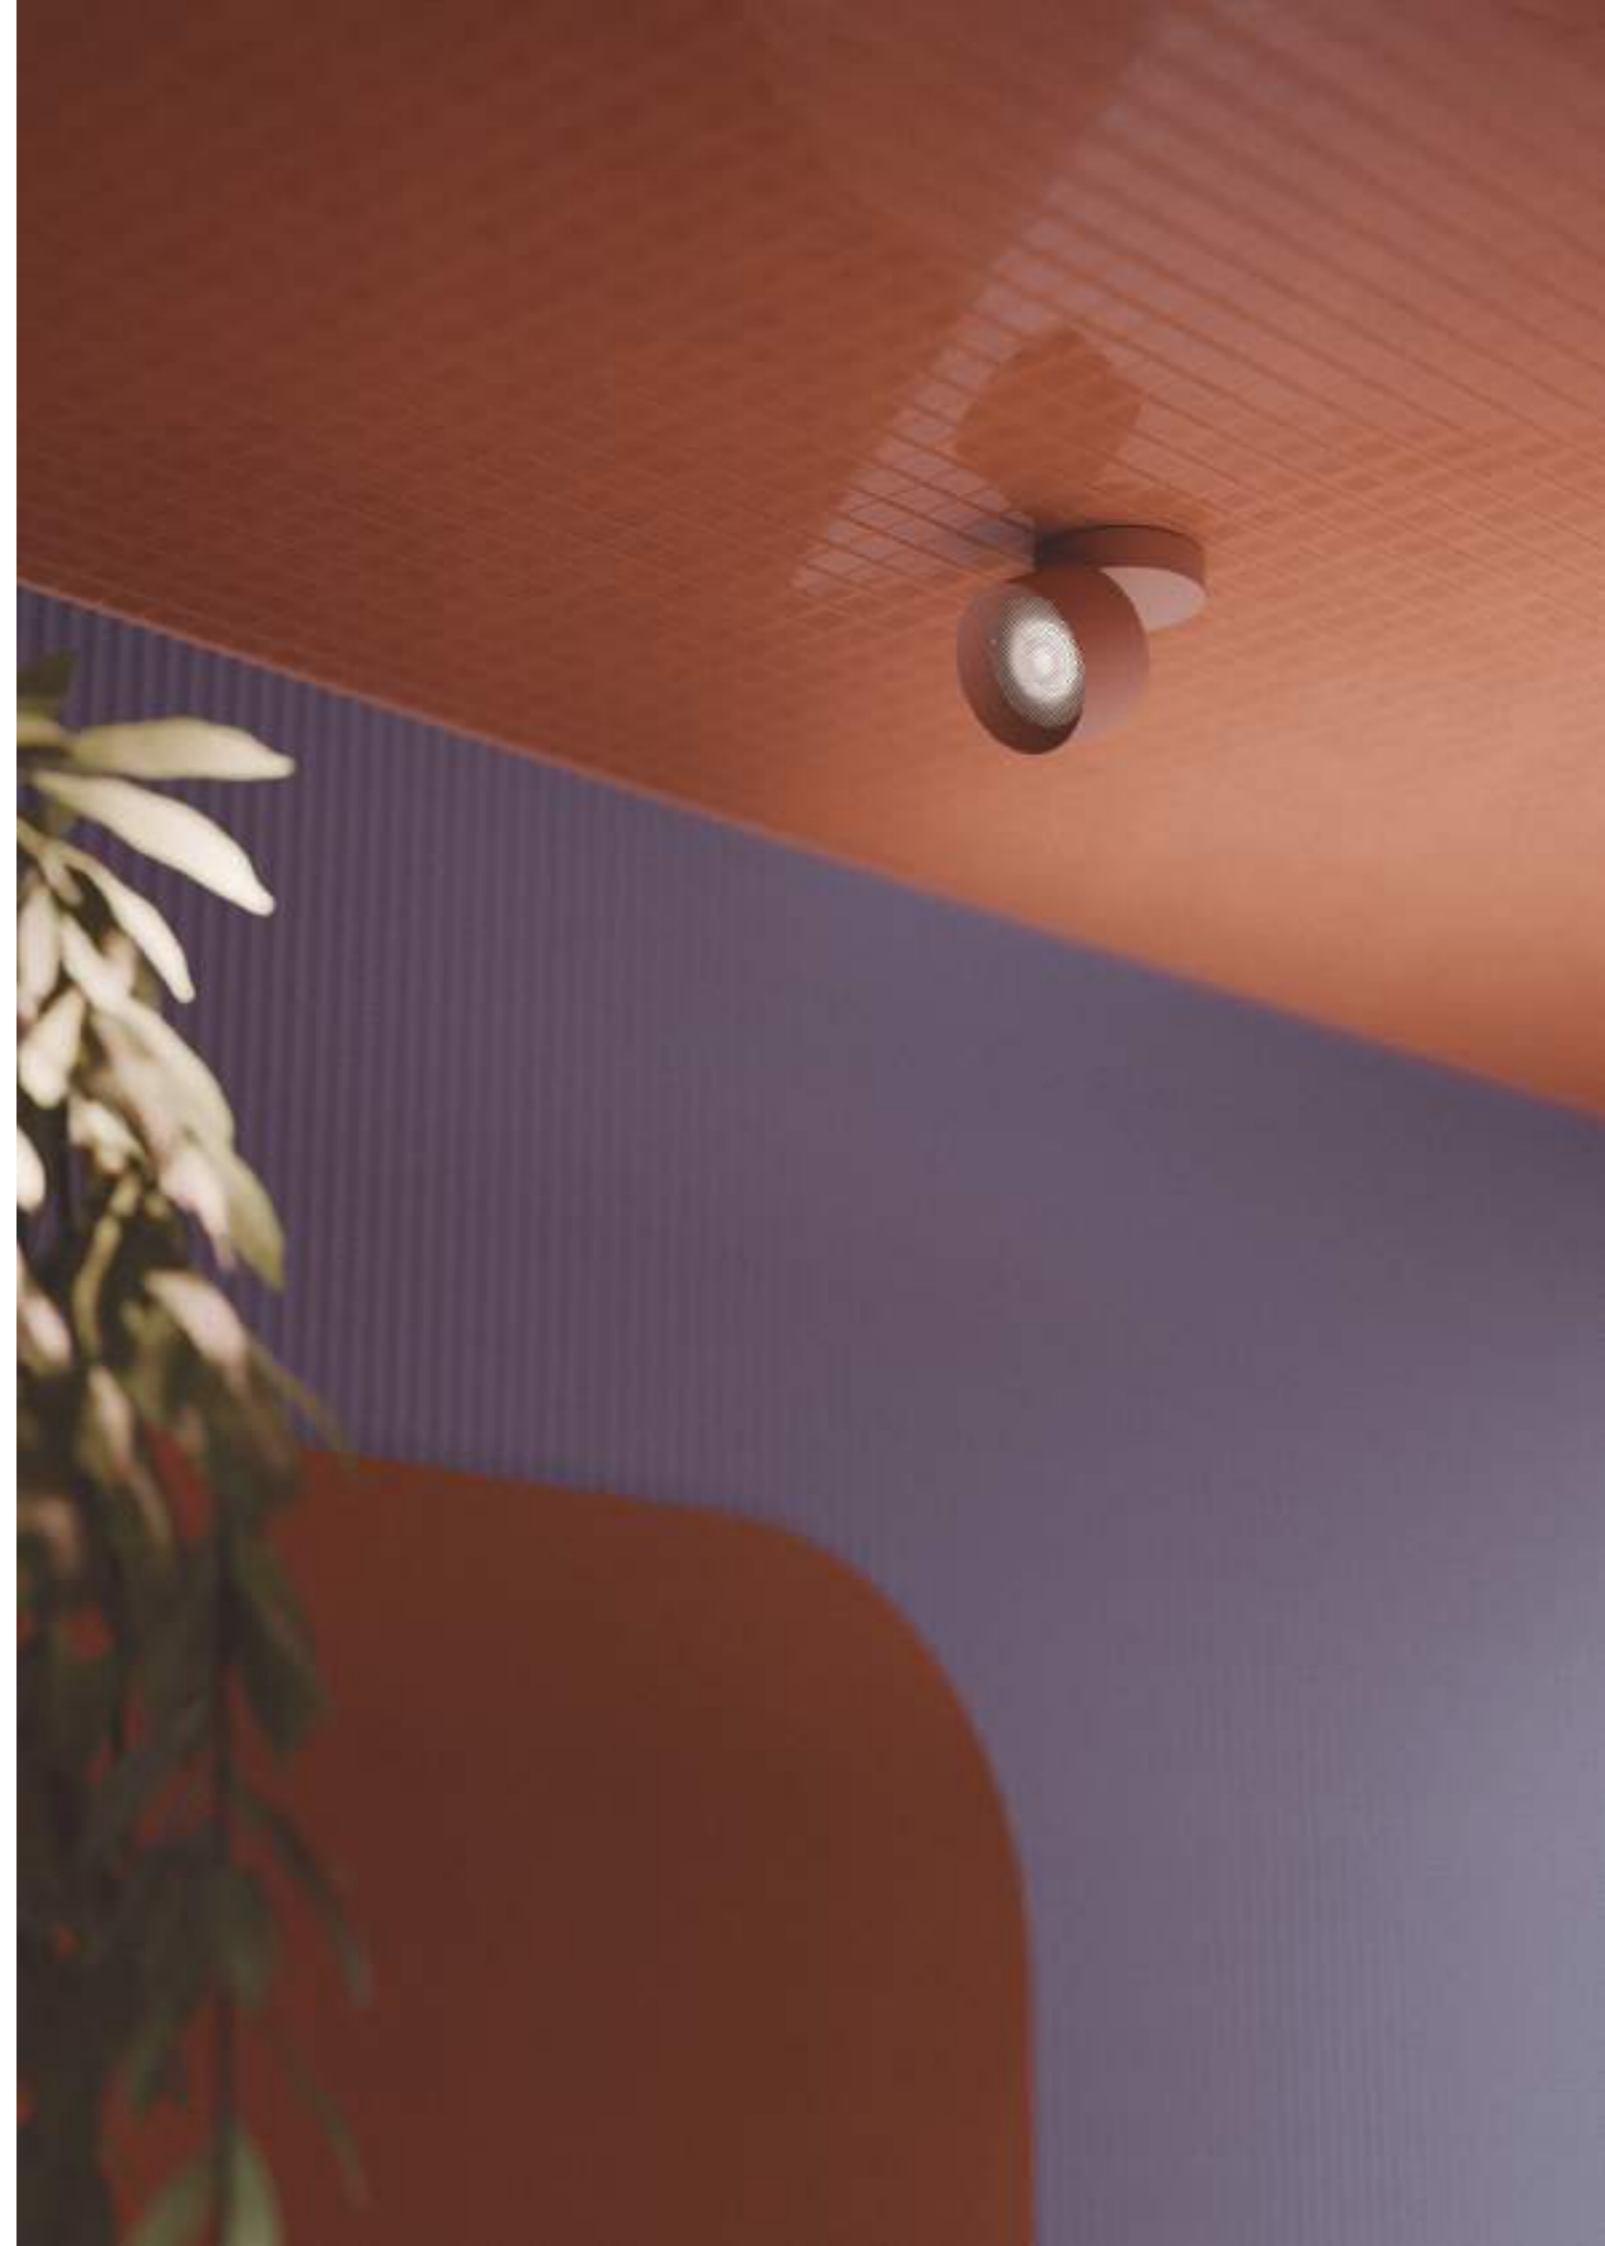

PM 111_on mov



Luminary

Luminária

- L70 > 35000h
- MacAdam 3

LED/Optic Óptica

- DOB VOSSLOH-SCHWABE
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panel de abeja (incluido)

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2259.927013HC.x	15W	HC36°	90	2700K	1020Lm	68Lm/W
2259.930013HC.x	15W	HC36°	90	3000K	1084Lm	73Lm/W



PM 111_p on

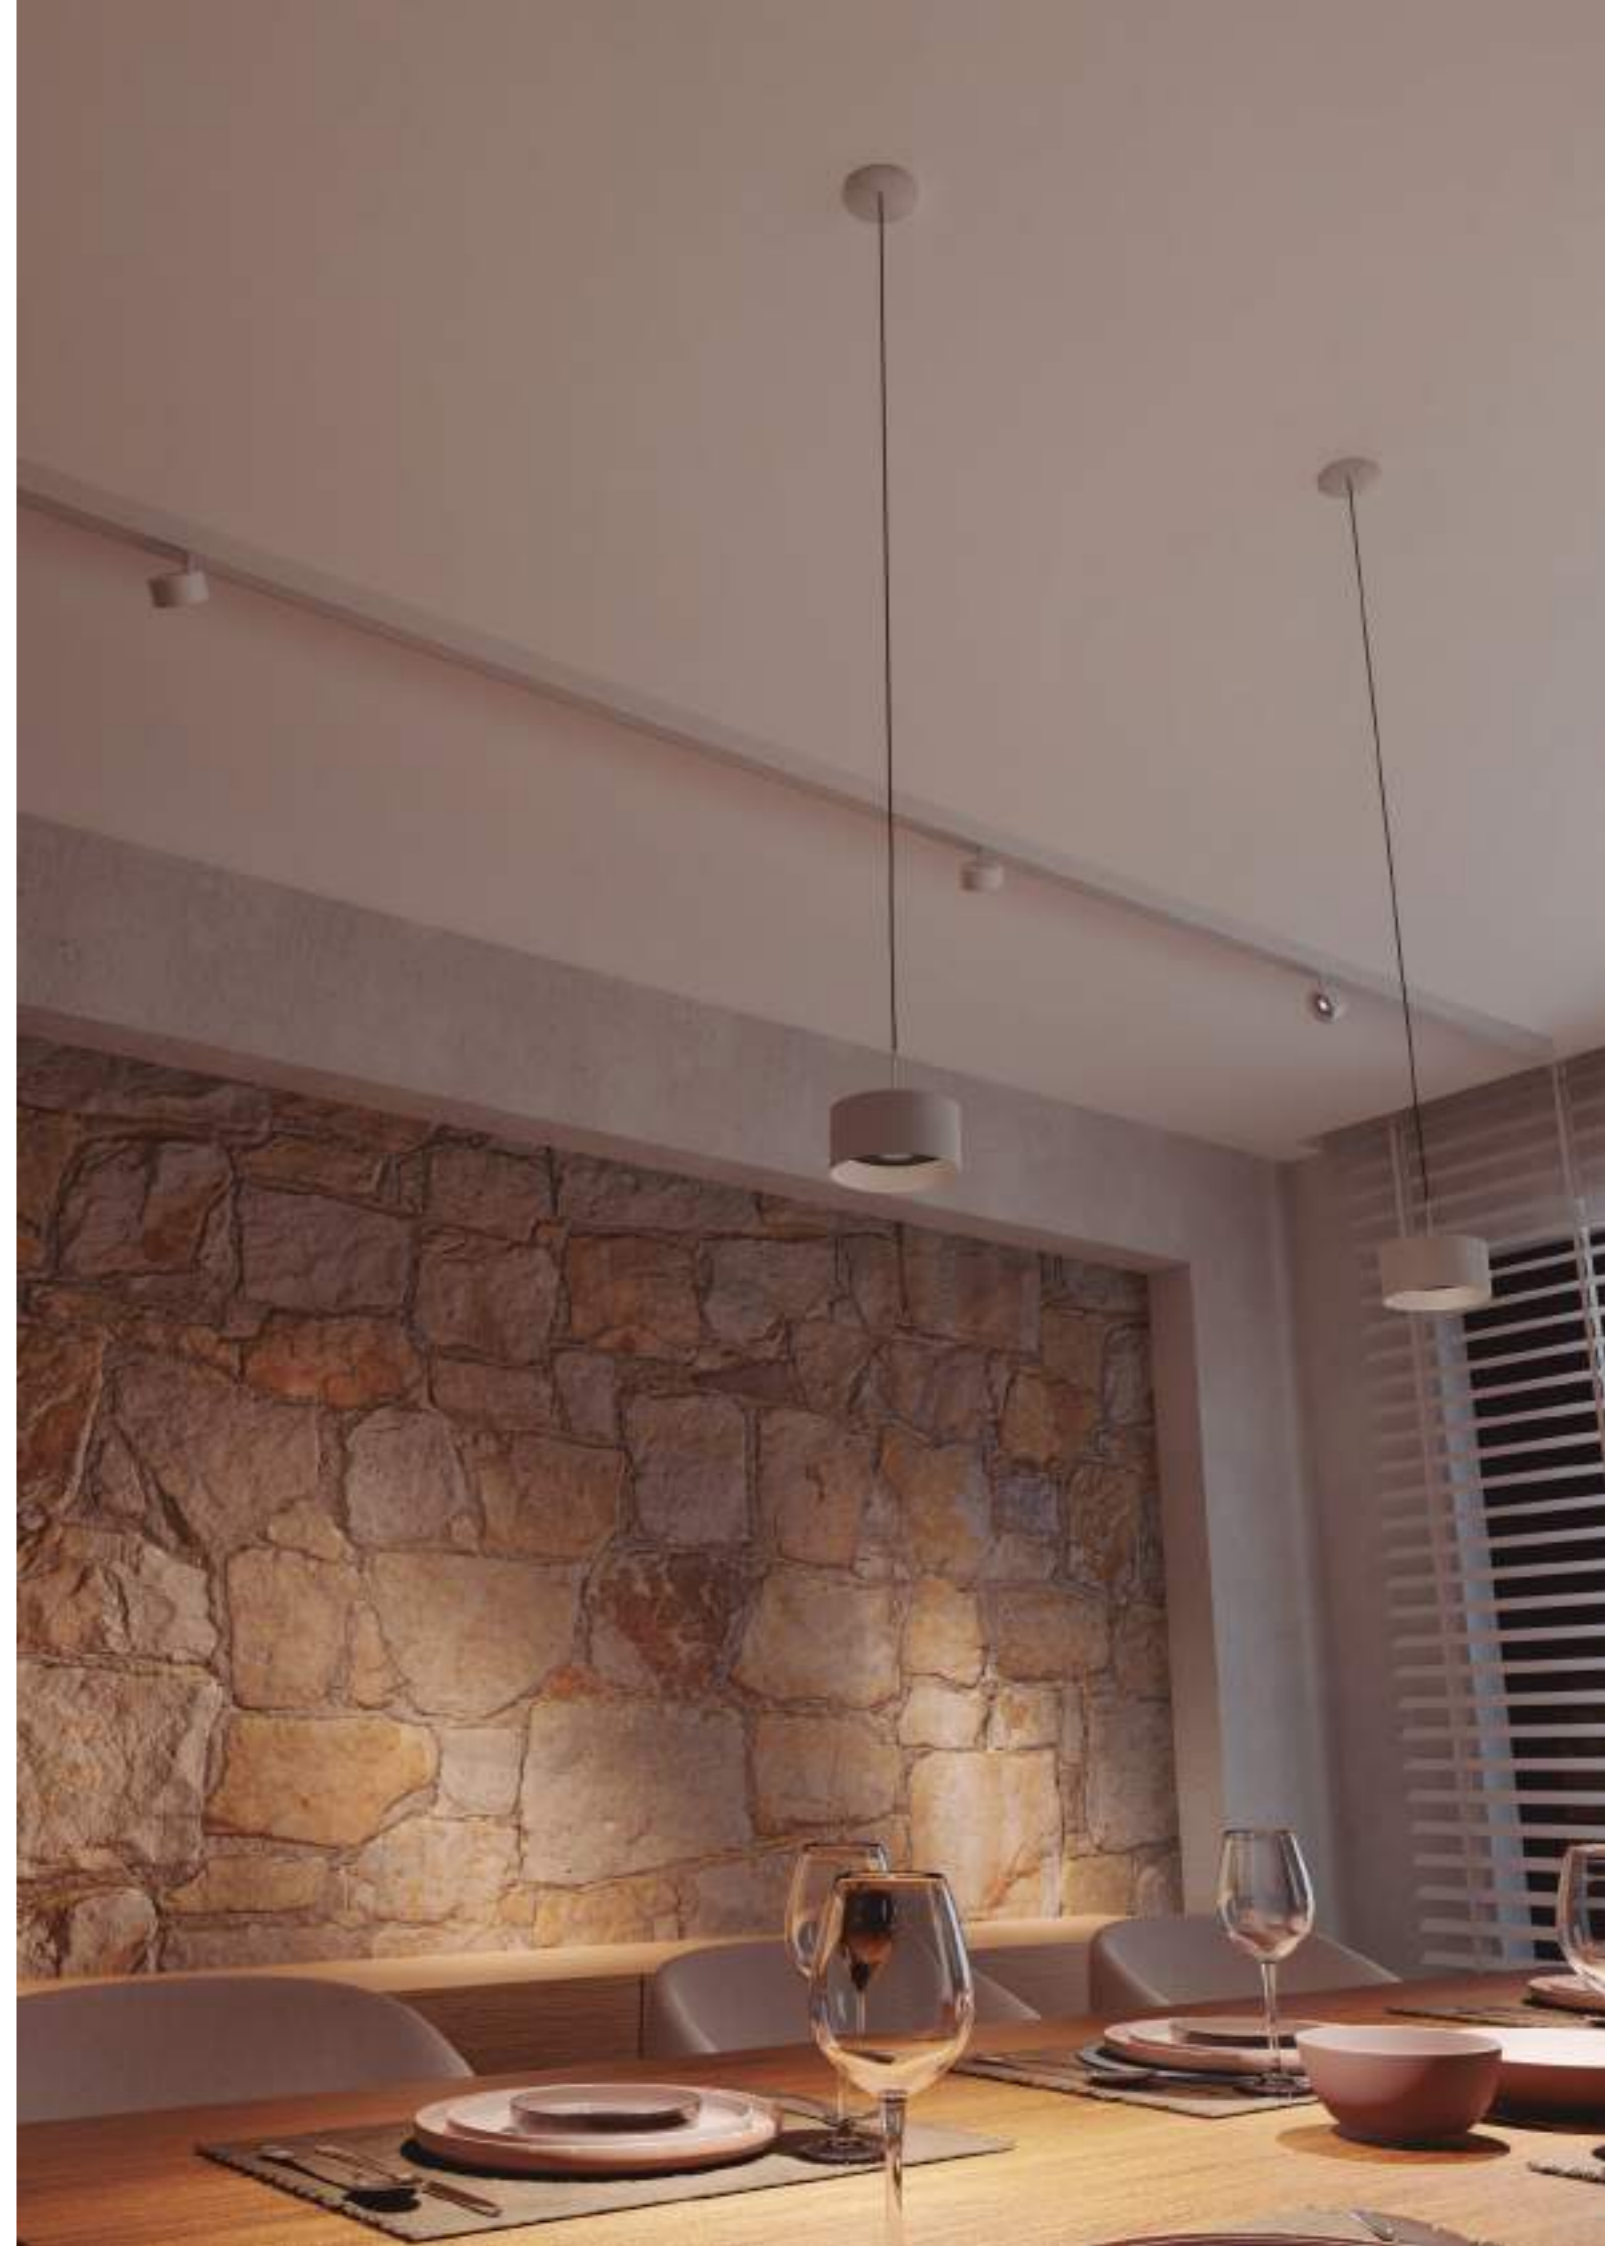

PM 111_p on



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

Optic Óptica

- COB LUMINUS
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2256.927018HA.x	20,7W	HC15°	90	2700K	1464Lm	71Lm/W
2256.927018HC.x	20,7W	HC36°	90	2700K	1464Lm	71Lm/W
2256.930018HA.x	20,7W	HC15°	90	3000K	1579Lm	77Lm/W
2256.930018HC.x	20,7W	HC36°	90	3000K	1579Lm	77Lm/W
2256.940018HA.x	20,7W	HC15°	90	4000K	1698Lm	82Lm/W
2256.940018HC.x	20,7W	HC36°	90	4000K	1698Lm	82Lm/W

Ask for recessed base.
Base de empotrar, consultar.

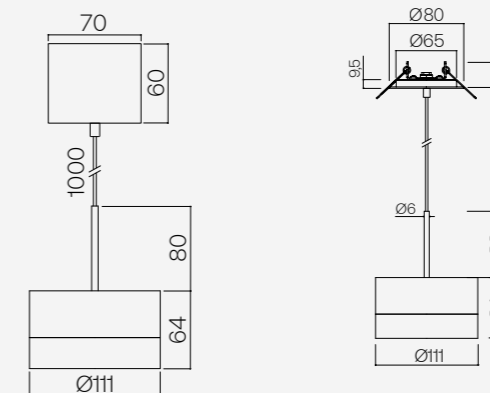

PM 111_trk mag



PM 111_trk mag



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Profile Carril

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
6211.927018HA.x	20,7W	HC15°	90	2700K	1464Lm	71Lm/W
6211.927018HC.x	20,7W	HC36°	90	2700K	1464Lm	71Lm/W
6211.930018HA.x	20,7W	HC15°	90	3000K	1579Lm	77Lm/W
6211.930018HC.x	20,7W	HC36°	90	3000K	1579Lm	77Lm/W
6211.940018HA.x	20,7W	HC15°	90	4000K	1698Lm	82Lm/W
6211.940018HC.x	20,7W	HC36°	90	4000K	1698Lm	82Lm/W


Downloads Descargas



PM 111_trk 230V



PM 111_trk 230V



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Profile Carril

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
6210.927018HA.x	20,7W	HC15°	90	2700K	1464Lm	71Lm/W
6210.927018HC.x	20,7W	HC36°	90	2700K	1464Lm	71Lm/W
6210.930018HA.x	20,7W	HC15°	90	3000K	1579Lm	77Lm/W
6210.930018HC.x	20,7W	HC36°	90	3000K	1579Lm	77Lm/W
6210.940018HA.x	20,7W	HC15°	90	4000K	1698Lm	82Lm/W
6210.940018HC.x	20,7W	HC36°	90	4000K	1698Lm	82Lm/W

Downloads Descargas

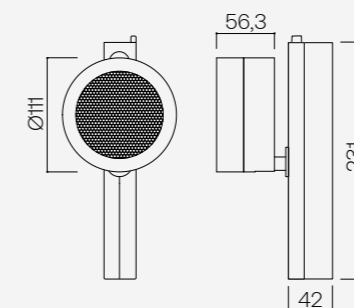

HALO

by Bruno de Avila



Recessed

40_in fix p. 180 73_in fix p. 184

In Halo we have achieved a fusion of elegance and functionality.
A minimalist design that blends perfectly with the ceiling.

*En Halo hemos conseguido aunar la elegancia y la funcionalidad.
Un diseño minimalista que se fusiona de manera perfecta con el techo.*



HALO 40_in fix



Halo is completely integrated into the space, creating an atmosphere where light is the main protagonist.

Halo se integra completamente en el espacio, creando un ambiente donde el gran protagonista es la luz.



HALO 40_in fix



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

Dimming Regulación

- NO-DRV
- DALI DT8

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)
- Transparent glass
Cristal transparent

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2253.I27007H1.x	7,8W	HC10°	95	2700K	545Lm	70Lm/W
2253.I27007HA.x	7,8W	HC15°	95	2700K	545Lm	70Lm/W
2253.I27007HB.x	7,8W	HC24°	95	2700K	545Lm	70Lm/W
2253.I27007HC.x	7,8W	HC36°	95	2700K	545Lm	70Lm/W
2253.I27007H5.x	7,8W	HC50°	95	2700K	545Lm	70Lm/W
2253.I30007H1.x	7,8W	HC10°	95	3000K	573Lm	74Lm/W
2253.I30007HA.x	7,8W	HC15°	95	3000K	573Lm	74Lm/W
2253.I30007HB.x	7,8W	HC24°	95	3000K	573Lm	74Lm/W
2253.I30007HC.x	7,8W	HC36°	95	3000K	573Lm	74Lm/W
2253.I30007H5.x	7,8W	HC50°	95	3000K	573Lm	74Lm/W
2253.I40007H1.x	7,8W	HC10°	95	4000K	629Lm	81Lm/W
2253.I40007HA.x	7,8W	HC15°	95	4000K	629Lm	81Lm/W
2253.I40007HB.x	7,8W	HC24°	95	4000K	629Lm	81Lm/W
2253.I40007HC.x	7,8W	HC36°	95	4000K	629Lm	81Lm/W
2253.I40007H5.x	7,8W	HC50°	95	4000K	629Lm	81Lm/W

Tunable White

2253.TWB005HA.x	6,2W	HC15°	90	1800-4000K	275-450Lm	45-73Lm/W
2253.TWB005HB.x	6,2W	HC24°	90	1800-4000K	275-450Lm	45-73Lm/W
2253.TWB005HC.x	6,2W	HC36°	90	1800-4000K	275-450Lm	45-73Lm/W
2253.TWB005H5.x	6,2W	HC50°	90	1800-4000K	275-450Lm	45-73Lm/W




HALO 73_in fix



The Halo 73 combines exceptional lighting performance in a compact luminaire that can be integrated subtly into the architecture.

El modelo Halo 73 une un excepcional rendimiento lumínico en una luminaria compacta de integración sutil dentro de la arquitectura.

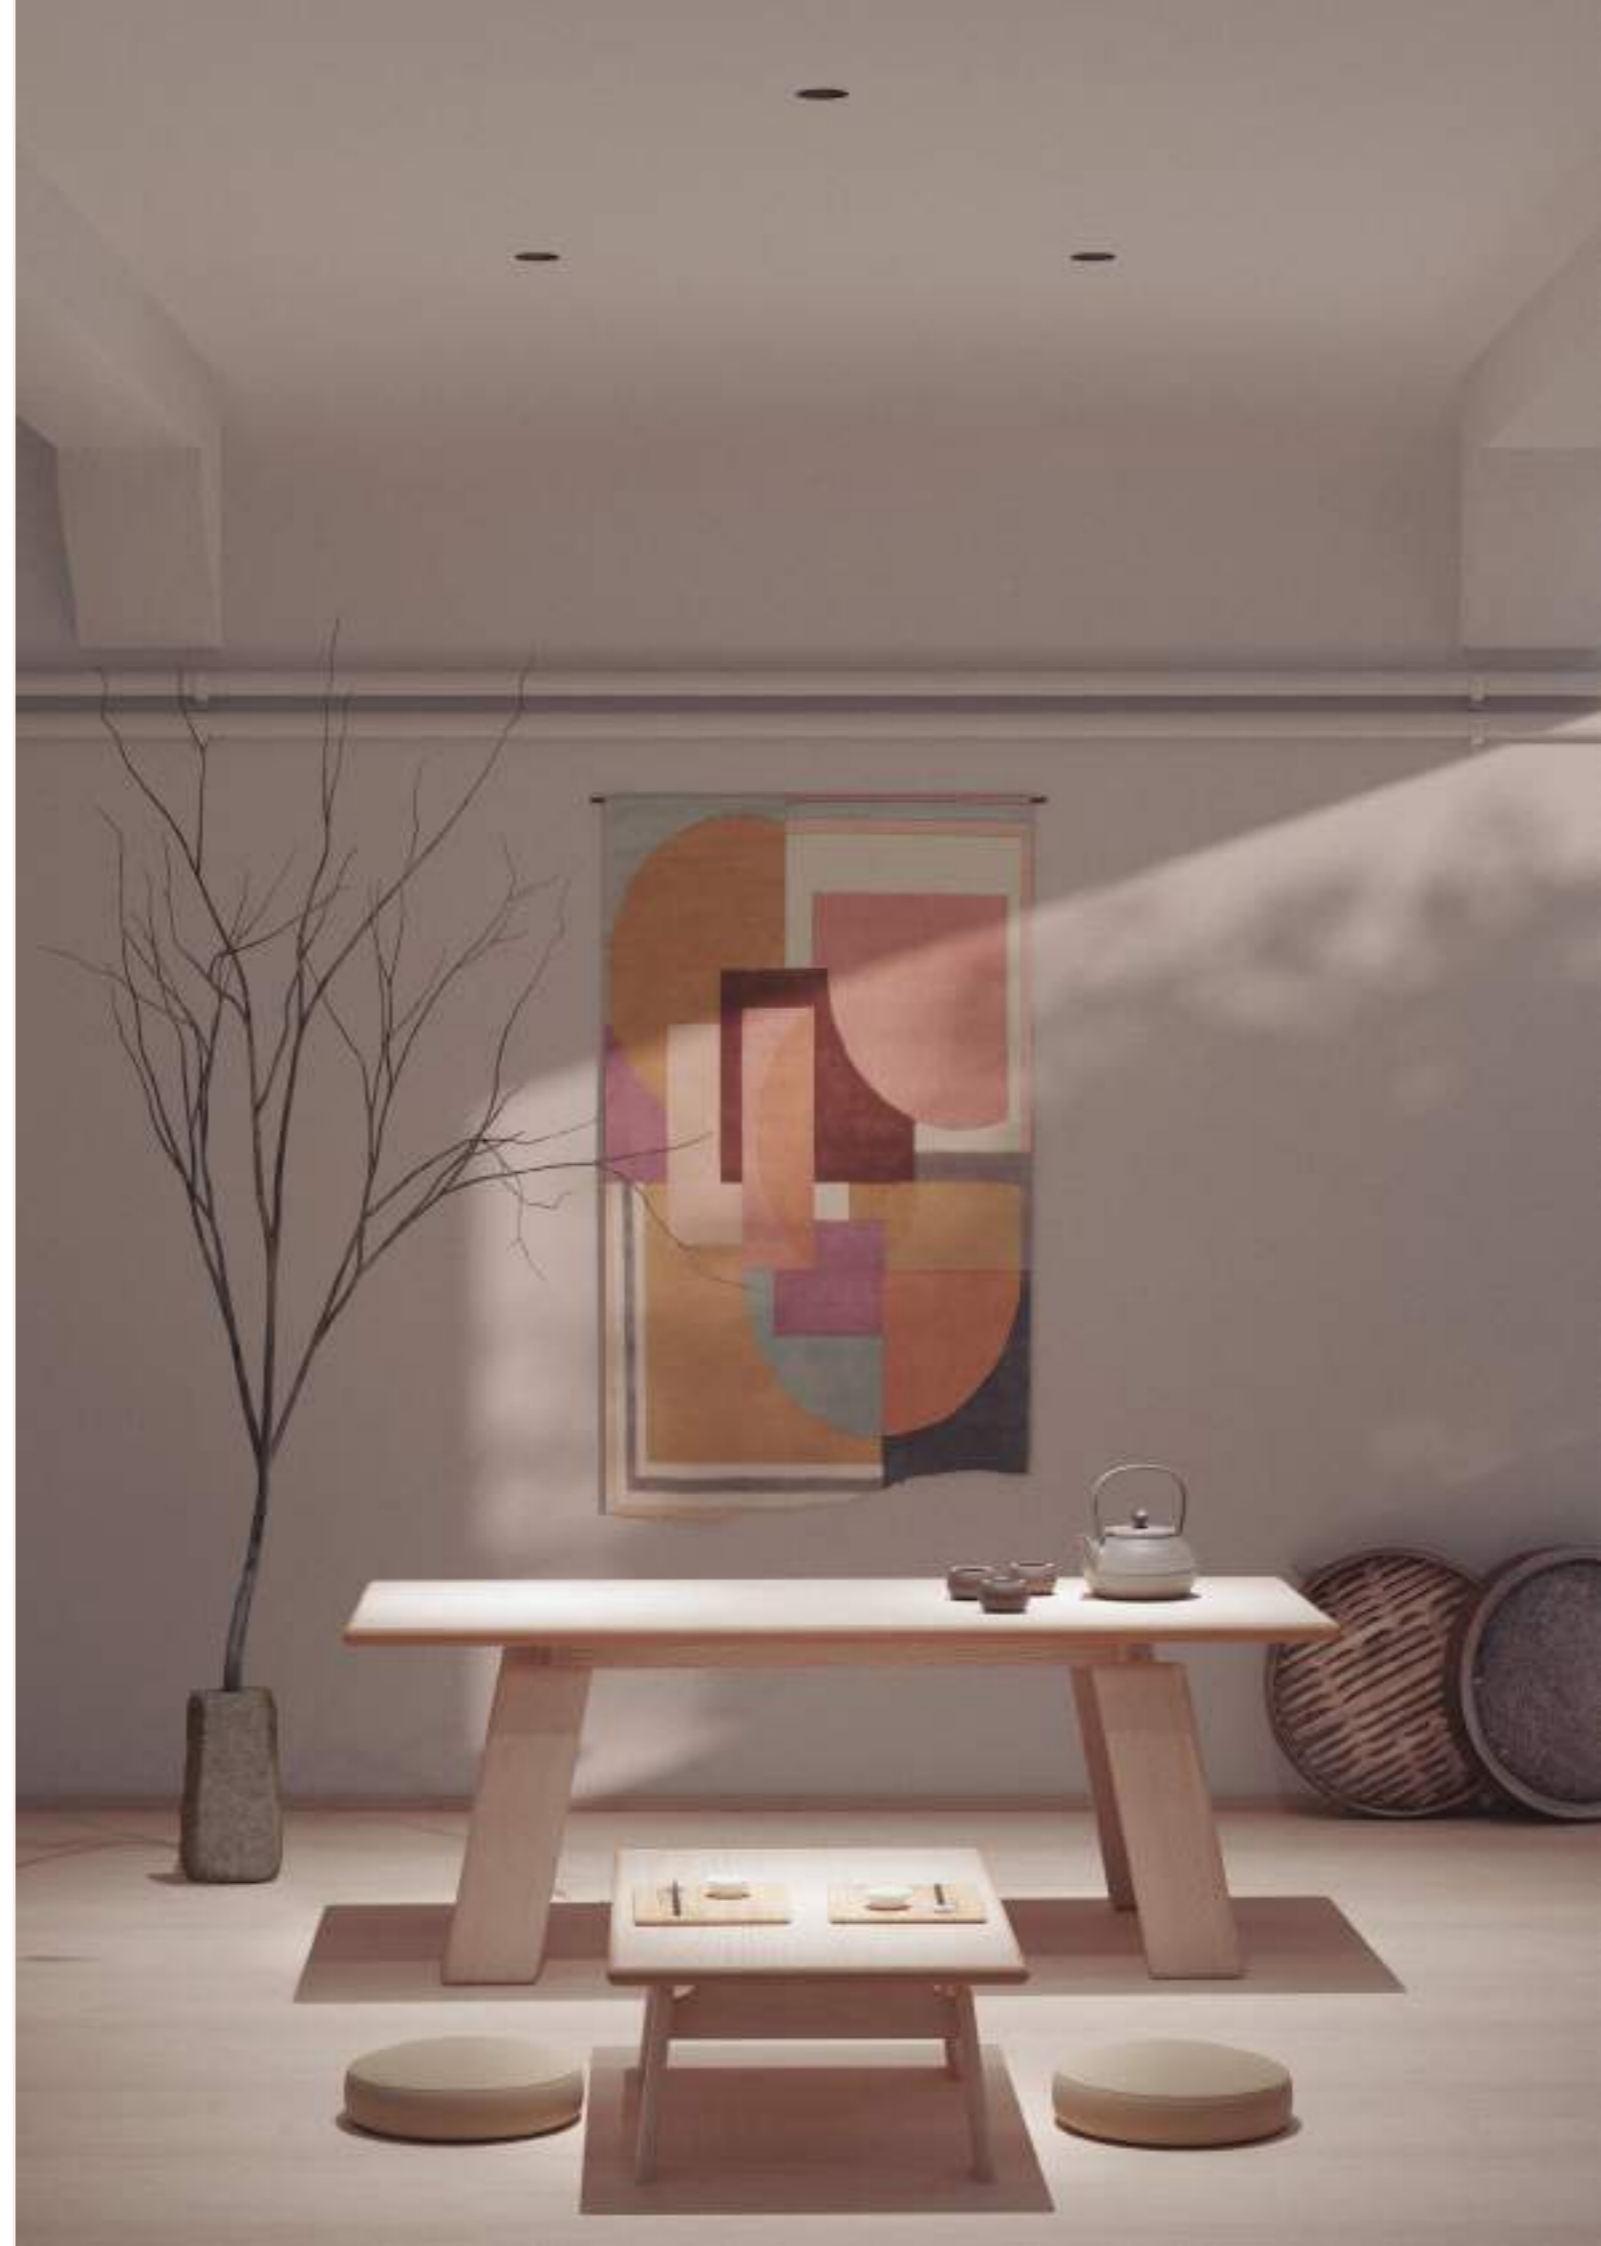

HALO 73_in fix



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)
- Transparent glass
Cristal transparente
- Frosted glass
Cristal glaseado

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2248.927009H2.x	10,3W	HC20°	90	2700K	683Lm	67Lm/W
2248.927009H4.x	10,3W	HC40°	90	2700K	683Lm	67Lm/W
2248.927009H6.x	10,3W	HC60°	90	2700K	683Lm	67Lm/W
2248.930009H2.x	10,3W	HC20°	90	3000K	779Lm	76Lm/W
2248.930009H4.x	10,3W	HC40°	90	3000K	779Lm	76Lm/W
2248.930009H6.x	10,3W	HC60°	90	3000K	779Lm	76Lm/W
2248.940009H2.x	10,3W	HC20°	90	4000K	870Lm	85Lm/W
2248.940009H4.x	10,3W	HC40°	90	4000K	870Lm	85Lm/W
2248.940009H6.x	10,3W	HC60°	90	4000K	870Lm	85Lm/W
2248.927012HB.x	13,6W	HC25°	90	2700K	1080Lm	80Lm/W
2248.927012HD.x	13,6W	HC43°	90	2700K	1080Lm	80Lm/W
2248.927012H6.x	13,6W	HC60°	90	2700K	1080Lm	80Lm/W
2248.930012HB.x	13,6W	HC25°	90	3000K	1217Lm	90Lm/W
2248.930012HD.x	13,6W	HC43°	90	3000K	1217Lm	90Lm/W
2248.930012H6.x	13,6W	HC60°	90	3000K	1217Lm	90Lm/W
2248.940012HB.x	13,6W	HC25°	90	4000K	1318Lm	97Lm/W
2248.940012HD.x	13,6W	HC43°	90	4000K	1318Lm	97Lm/W
2248.940012H6.x	13,6W	HC60°	90	4000K	1318Lm	97Lm/W

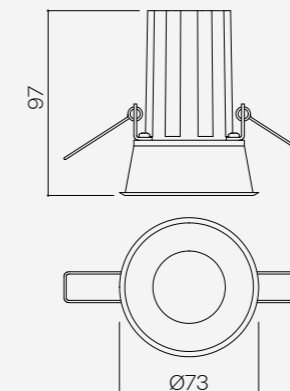

PM 40_in fix
by *eng*

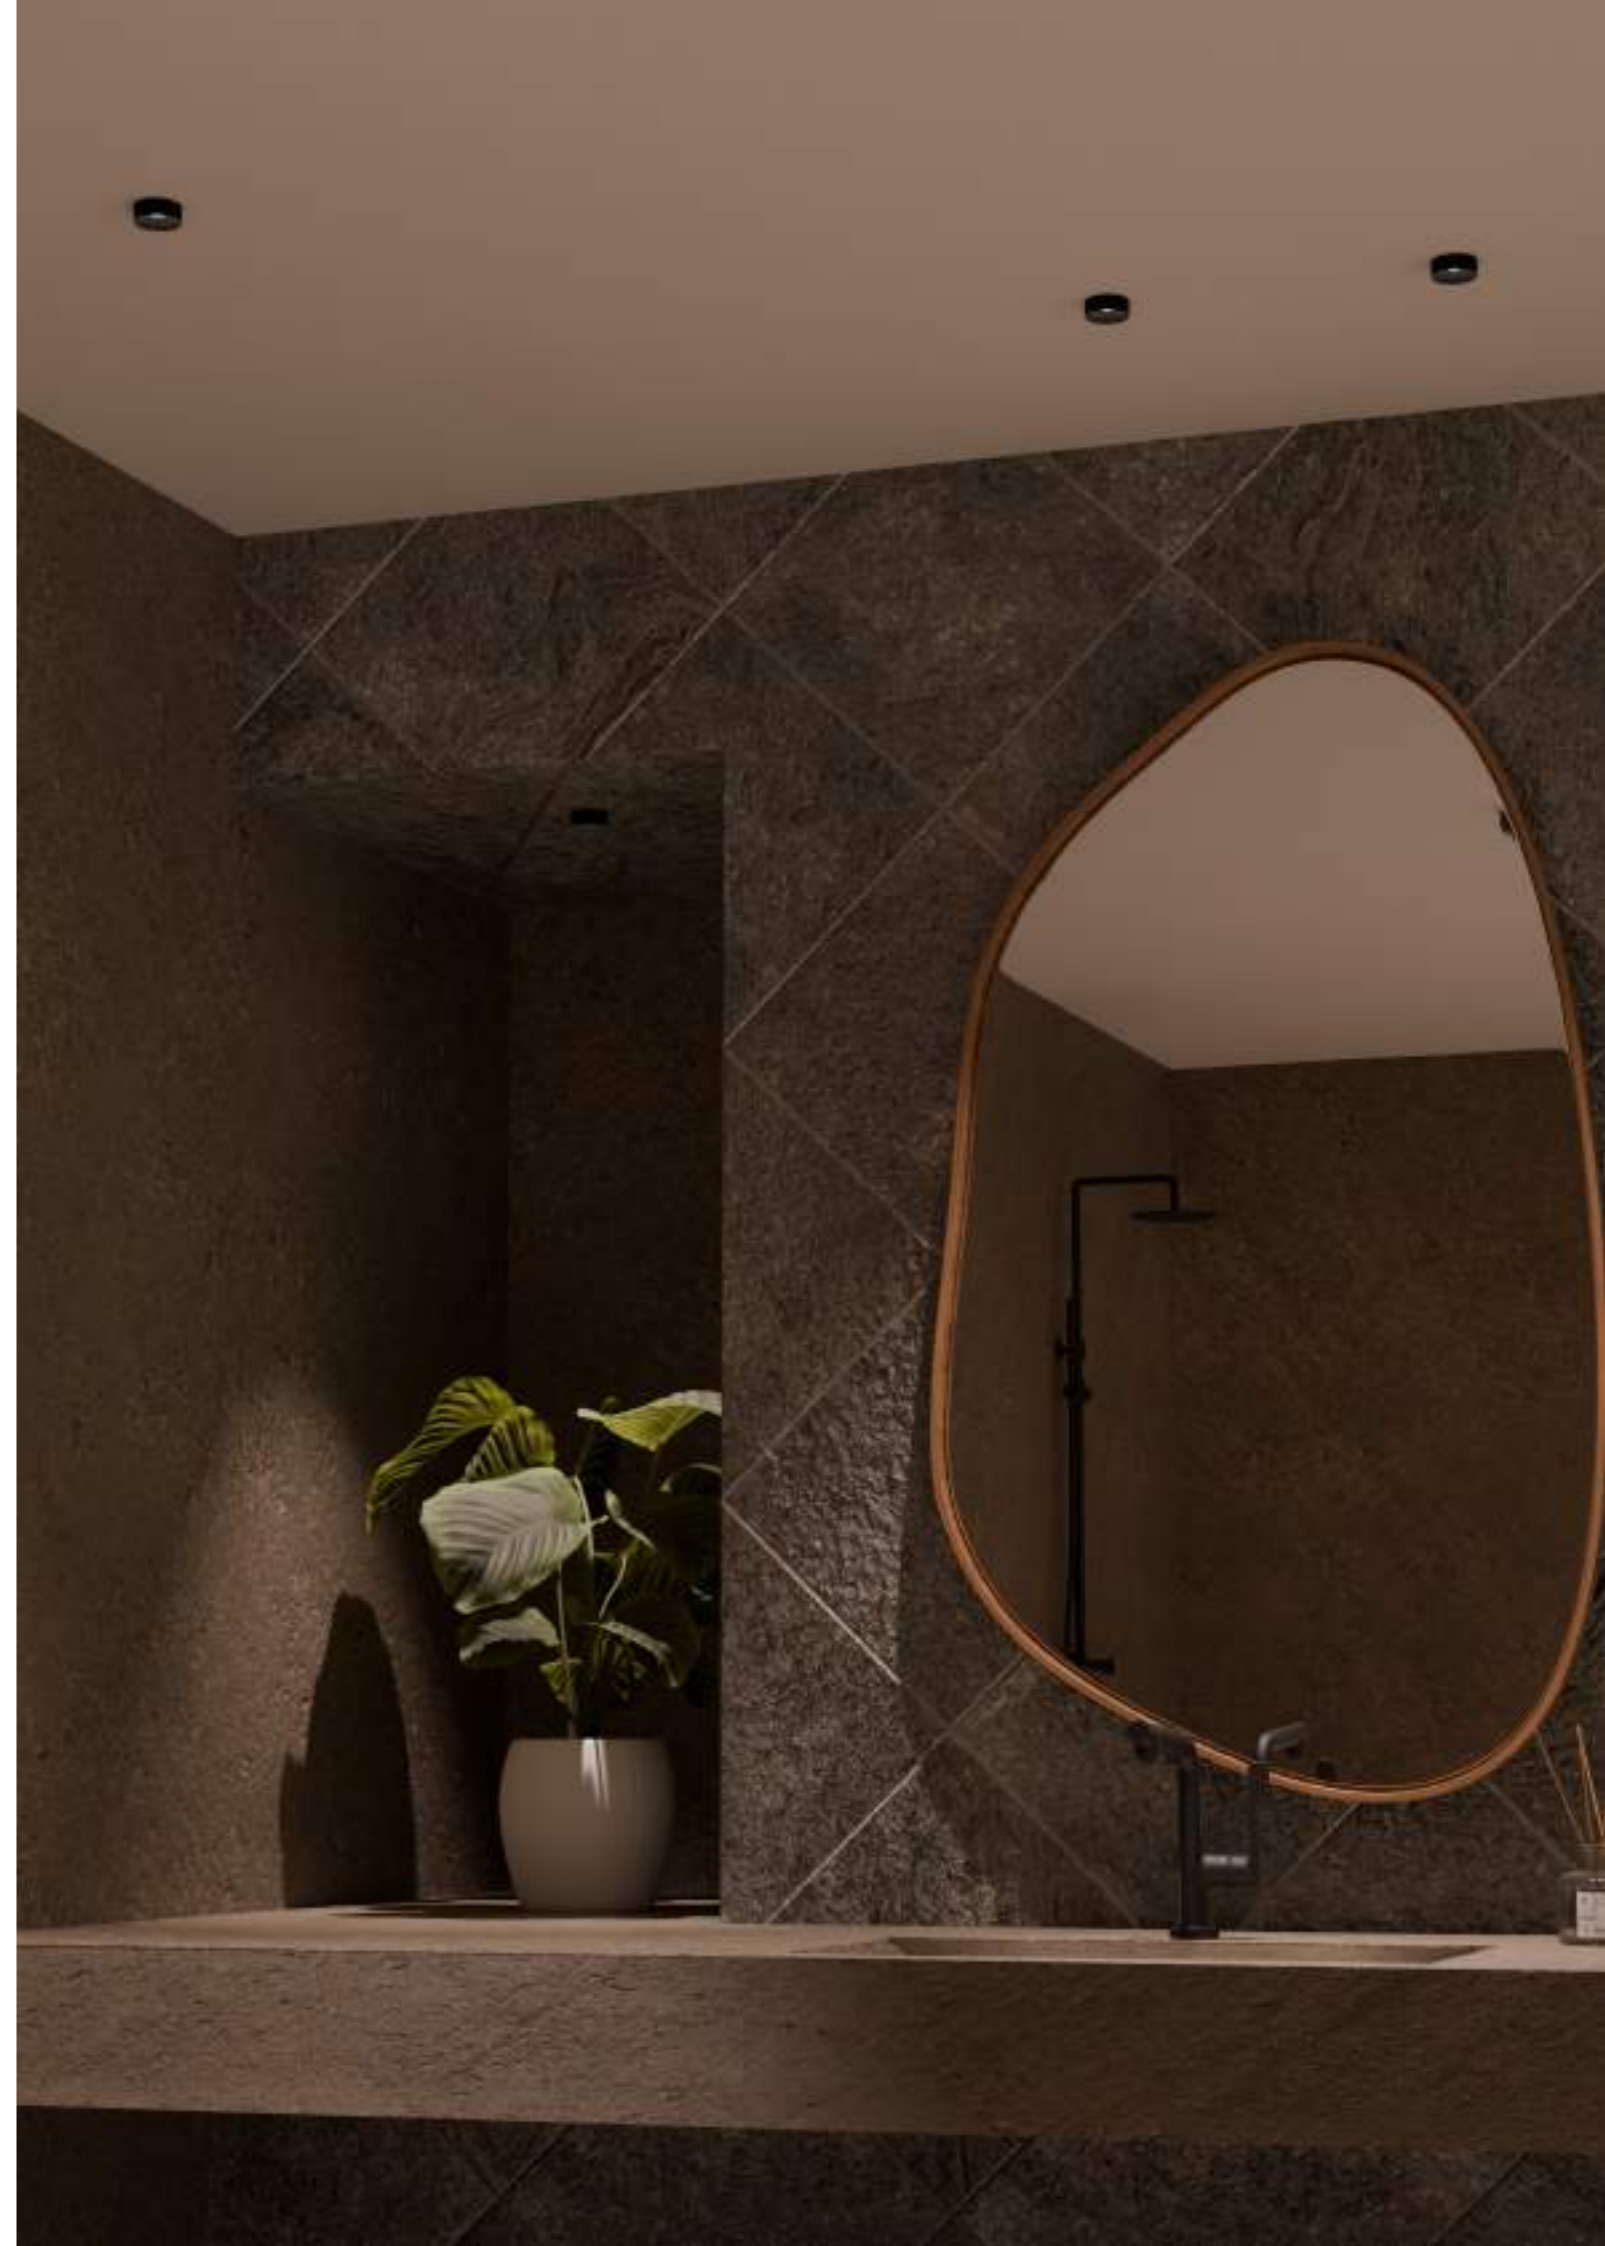

PM 40_in fix



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

Dimming Regulación

- NO-DRV
- DALI DT8

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)
- Transparent glass
Cristal transparent

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2276.I27007H1.x	7,8W	HC10°	95	2700K	545Lm	70Lm/W
2276.I27007HA.x	7,8W	HC15°	95	2700K	545Lm	70Lm/W
2276.I27007HB.x	7,8W	HC24°	95	2700K	545Lm	70Lm/W
2276.I27007HC.x	7,8W	HC36°	95	2700K	545Lm	70Lm/W
2276.I27007H5.x	7,8W	HC50°	95	2700K	545Lm	70Lm/W
2276.I30007H1.x	7,8W	HC10°	95	3000K	573Lm	74Lm/W
2276.I30007HA.x	7,8W	HC15°	95	3000K	573Lm	74Lm/W
2276.I30007HB.x	7,8W	HC24°	95	3000K	573Lm	74Lm/W
2276.I30007HC.x	7,8W	HC36°	95	3000K	573Lm	74Lm/W
2276.I30007H5.x	7,8W	HC50°	95	3000K	573Lm	74Lm/W
2276.I40007H1.x	7,8W	HC10°	95	4000K	629Lm	81Lm/W
2276.I40007HA.x	7,8W	HC15°	95	4000K	629Lm	81Lm/W
2276.I40007HB.x	7,8W	HC24°	95	4000K	629Lm	81Lm/W
2276.I40007HC.x	7,8W	HC36°	95	4000K	629Lm	81Lm/W
2276.I40007H5.x	7,8W	HC50°	95	4000K	629Lm	81Lm/W

Tunable White


2276.TWB005HA.x	6,2W	HC15°	90	1800-4000K	275-450Lm	45-73Lm/W
2276.TWB005HB.x	6,2W	HC24°	90	1800-4000K	275-450Lm	45-73Lm/W
2276.TWB005HC.x	6,2W	HC36°	90	1800-4000K	275-450Lm	45-73Lm/W
2276.TWB005H5.x	6,2W	HC50°	90	1800-4000K	275-450Lm	45-73Lm/W

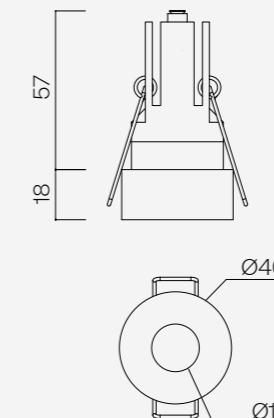

LOW 70_in fix
by *eng*



LOW 70_in fix



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- COB LUMINUS
- COB BRIDGELUX (Tunable White)
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Tunable White

Dimming Regulación

- NO-DRV
- DALI DT8

Protection Protección

- IP20

Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)
- Transparent glass
Cristal transparent

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2270.I27007H1.x	7,8W	HC10°	95	2700K	545Lm	70Lm/W
2270.I27007HA.x	7,8W	HC15°	95	2700K	545Lm	70Lm/W
2270.I27007HB.x	7,8W	HC24°	95	2700K	545Lm	70Lm/W
2270.I27007HC.x	7,8W	HC36°	95	2700K	545Lm	70Lm/W
2270.I27007H5.x	7,8W	HC50°	95	2700K	545Lm	70Lm/W
2270.I30007H1.x	7,8W	HC10°	95	3000K	573Lm	74Lm/W
2270.I30007HA.x	7,8W	HC15°	95	3000K	573Lm	74Lm/W
2270.I30007HB.x	7,8W	HC24°	95	3000K	573Lm	74Lm/W
2270.I30007HC.x	7,8W	HC36°	95	3000K	573Lm	74Lm/W
2270.I30007H5.x	7,8W	HC50°	95	3000K	573Lm	74Lm/W
2270.I40007H1.x	7,8W	HC10°	95	4000K	629Lm	81Lm/W
2270.I40007HA.x	7,8W	HC15°	95	4000K	629Lm	81Lm/W
2270.I40007HB.x	7,8W	HC24°	95	4000K	629Lm	81Lm/W
2270.I40007HC.x	7,8W	HC36°	95	4000K	629Lm	81Lm/W
2270.I40007H5.x	7,8W	HC50°	95	4000K	629Lm	81Lm/W

Tunable White

2270.TWB005HA.x	6,2W	HC15°	90	1800-4000K	275-450Lm	45-73Lm/W
2270.TWB005HB.x	6,2W	HC24°	90	1800-4000K	275-450Lm	45-73Lm/W
2270.TWB005HC.x	6,2W	HC36°	90	1800-4000K	275-450Lm	45-73Lm/W
2270.TWB005H5.x	6,2W	HC50°	90	1800-4000K	275-450Lm	45-73Lm/W



NIO

by Her design team



The NIO collection achieves an unparalleled visual comfort, a glare-free design, creating a warm and comfortable atmosphere.

La colección NIO consigue un confort visual sin igual, un diseño que elimina los brillos y creando un ambiente cálido y confortable.


Recessed

3x1_in p. 198 2x2_in p. 200 5x1_in p. 202 3x3_in p. 204

Surface

2x2_on p. 208 3x3_on p. 210

NIO_in 3x1

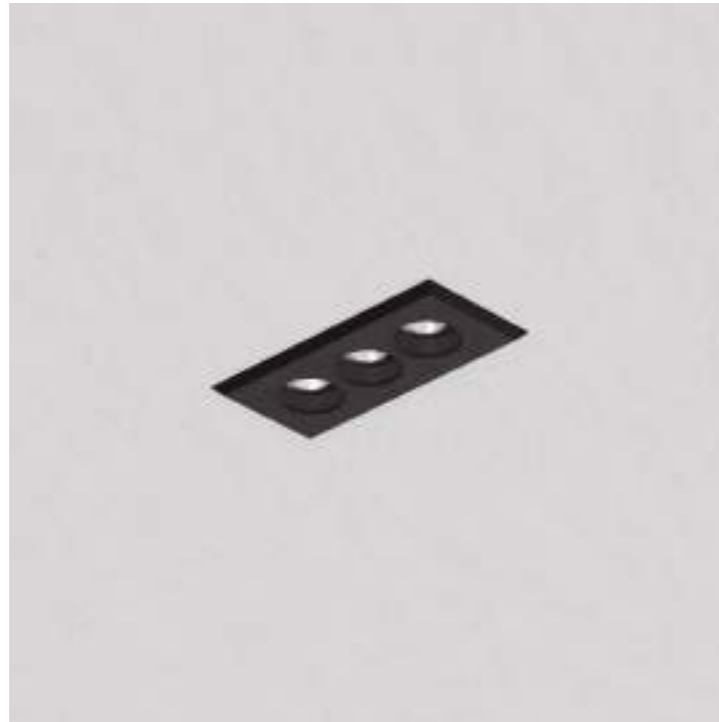

Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <13

LED/Optic Óptica

- MP LED BRIDGELUX
- Lens + Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R



Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E531.92700437.x	5,1W	37°	90	2700K	365Lm	72Lm/W
E531.93000437.x	5,1W	37°	90	3000K	385Lm	76Lm/W



NIO_in 2x2

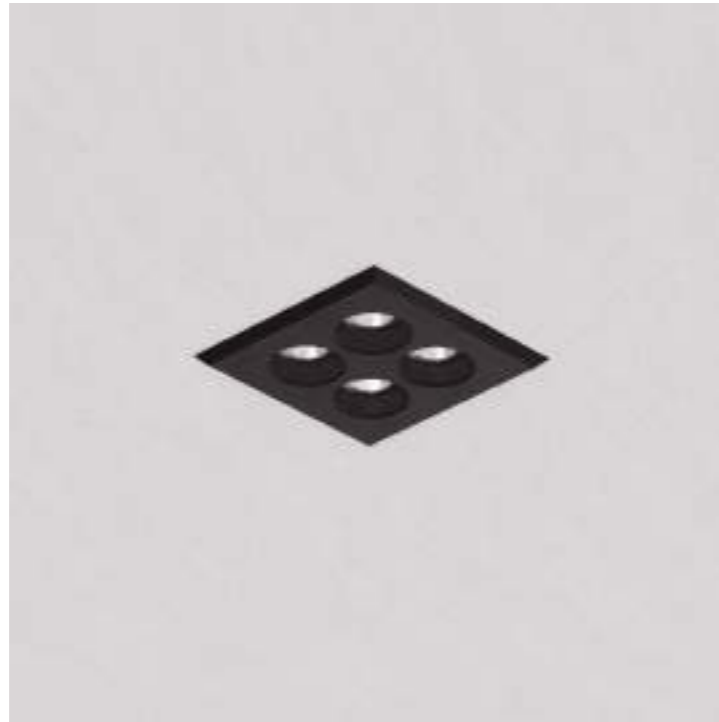

Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <13

LED/Optic Óptica

- MP LED BRIDGELUX
- Lens + Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E522.92700637.x	6,9W	37°	90	2700K	495Lm	72Lm/W
E522.93000637.x	6,9W	37°	90	3000K	520Lm	76Lm/W



NIO_in 5x1

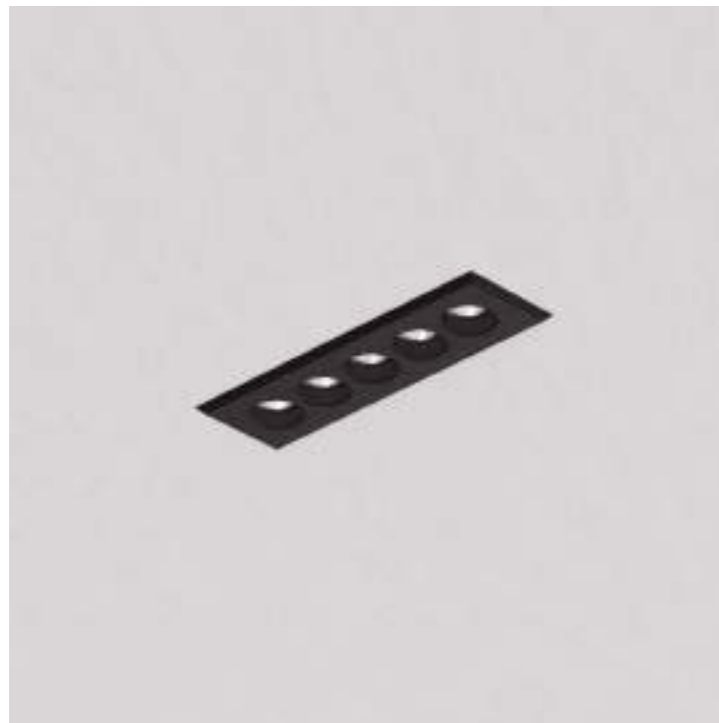

Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <13

LED/Optic Óptica

- MP LED BRIDGELUX
- Lens + Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E551.92700737.x	8,6W	37°	90	2700K	620Lm	73Lm/W
E551.93000737.x	8,6W	37°	90	3000K	650Lm	76Lm/W



NIO_in 3x3

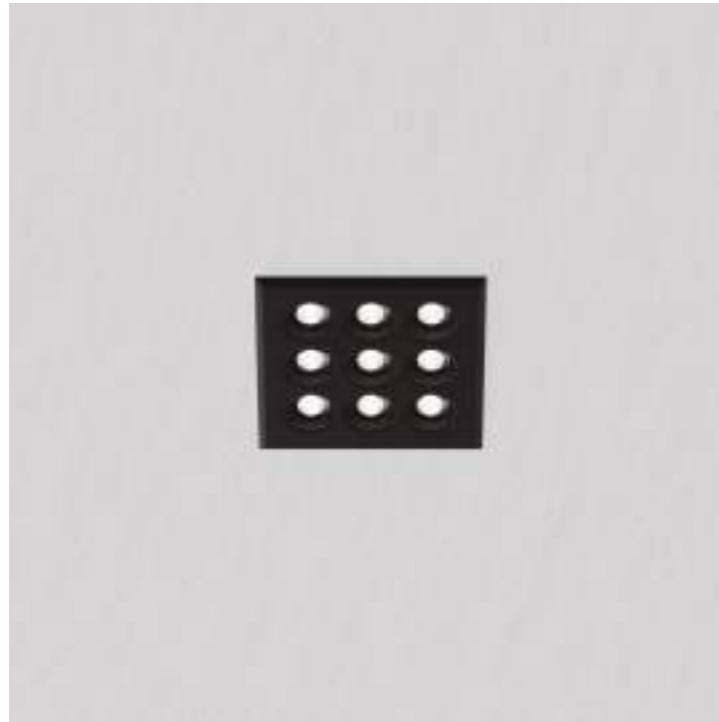

Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <13

LED/Optic Óptica

- MP LED BRIDGELUX
- Lens + Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E533.92701137.x	12,4W	37°	90	2700K	900Lm	73Lm/W
E533.93001137.x	12,4W	37°	90	3000K	945Lm	77Lm/W



NIO_on

by Her design team



A colourful and different approach to provide an innovative surface lighting solution.

Una apuesta colorida y diferente para aportar una solución innovadora de iluminación de superficie.



NIO_on 2x2



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <13

LED/Optic Óptica

- MP LED BRIDGELUX
- Lens + Reflector

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP54

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
S422.92700640.x	6,8W	40°	90	2700K	385Lm	57Lm/W
S422.93000640.x	6,8W	40°	90	3000K	405Lm	60Lm/W



NIO_on 3x3



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <13

LED/Optic Óptica

- MP LED BRIDGELUX
- Lens + Reflector

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP54

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
S433.92701040.x	11,3W	40°	90	2700K	750Lm	67Lm/W
S433.93001040.x	11,3W	40°	90	3000K	785Lm	70Lm/W




PM 60_on fix gu10

by *eng*



PM 60_on fix gu10



GU10 Bulb not included
Bombilla GU10 no incluida
(MR16/GU10 - Ø50 mm)

214 — Surface

Voltage Voltaje

• 220-240VAC

Driver

• Not included

Protection Protección

• IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.

2266.00000000.x

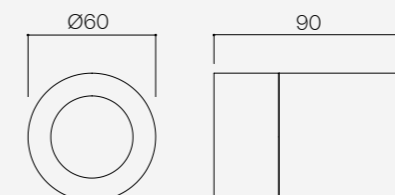

PL 80_in fix e27
by *eng*



PL 80_in fix e27

by *eng*



E27 Bulb not included
Bombilla E27 no incluida

218 — Recessed

Voltage Voltaje
• 220-240VAC

Driver
• Not included

Protection Protección
• IP20

Basic finishes
Acabados básicos
● Black
● White

Special finishes
Acabados especiales


NCS
● Oliva - S 7010-G30Y
● Ocre - S 5040-Y70R
● Terracota - S 3050-Y60R
● Mocha - S 5010-Y10R
● Sand - S 2005-Y50R

Metallic Metálico
● Gun Metal
● Bronze
● Brushed Copper
● Old Silver
● Cava


Downloads Descargas






Cod.
2228.00000000x



NIK

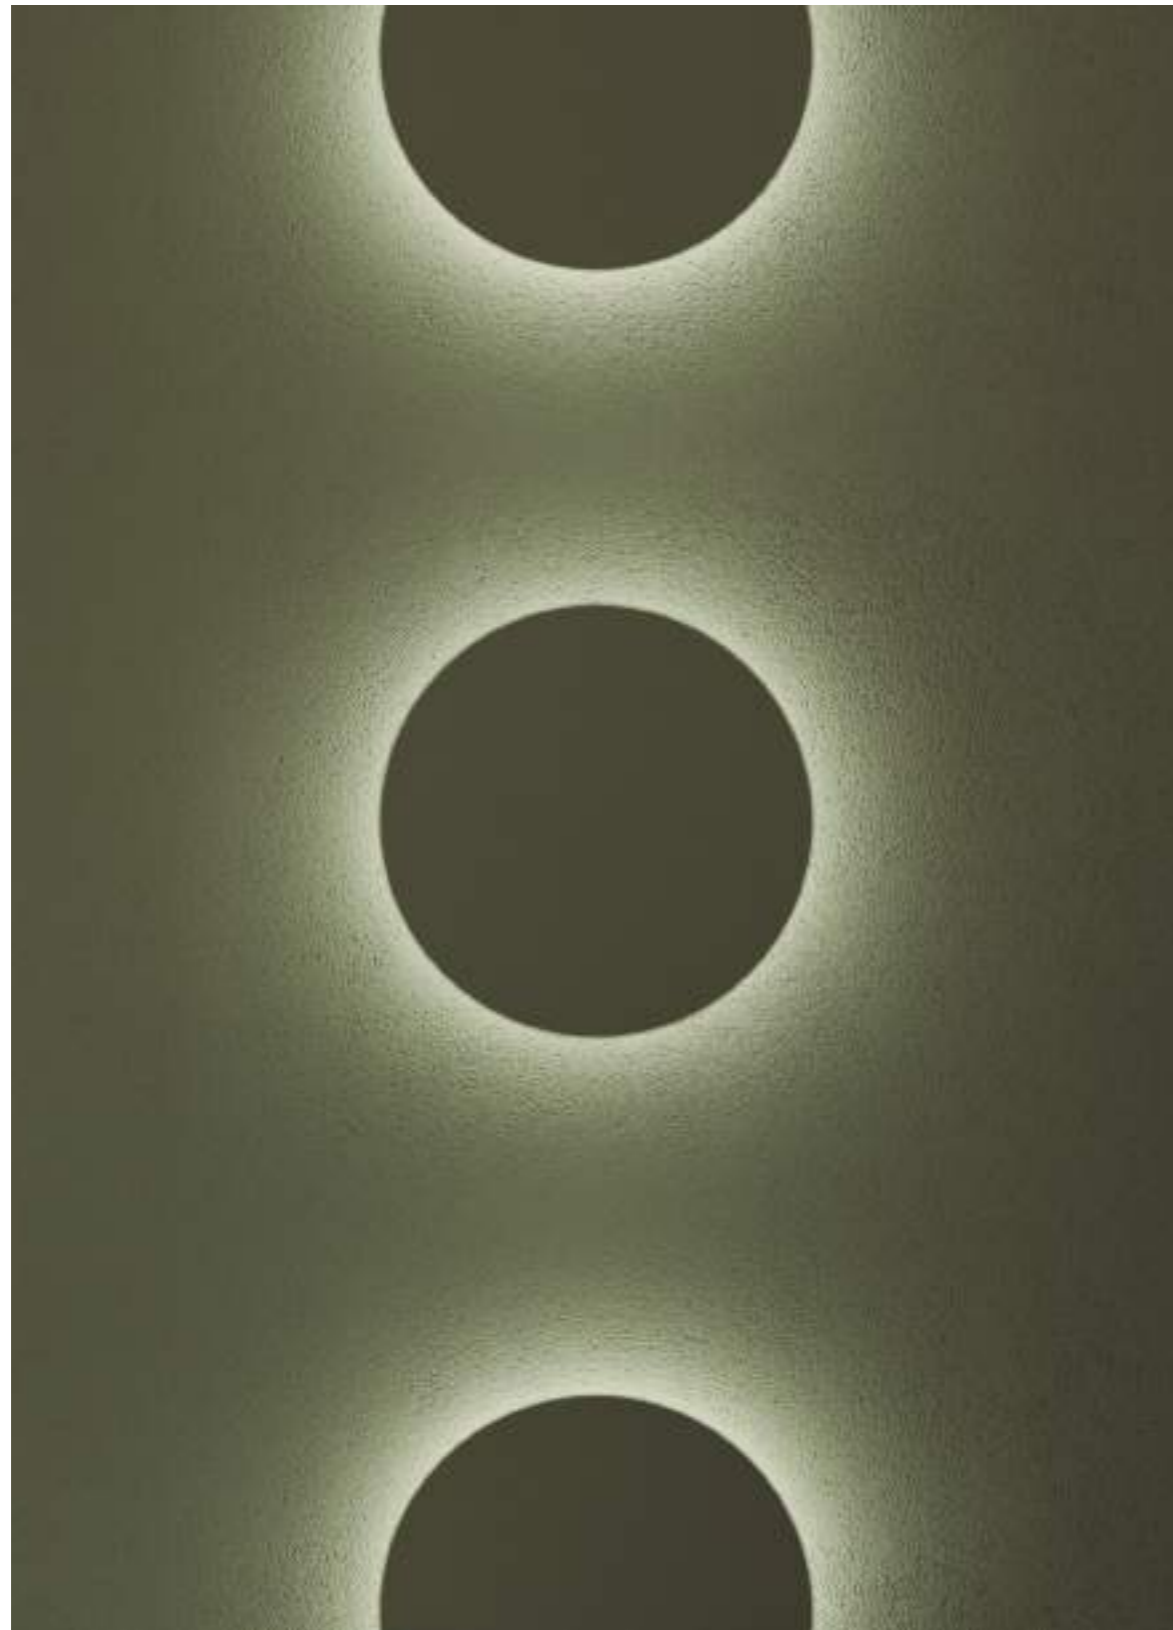

Nik

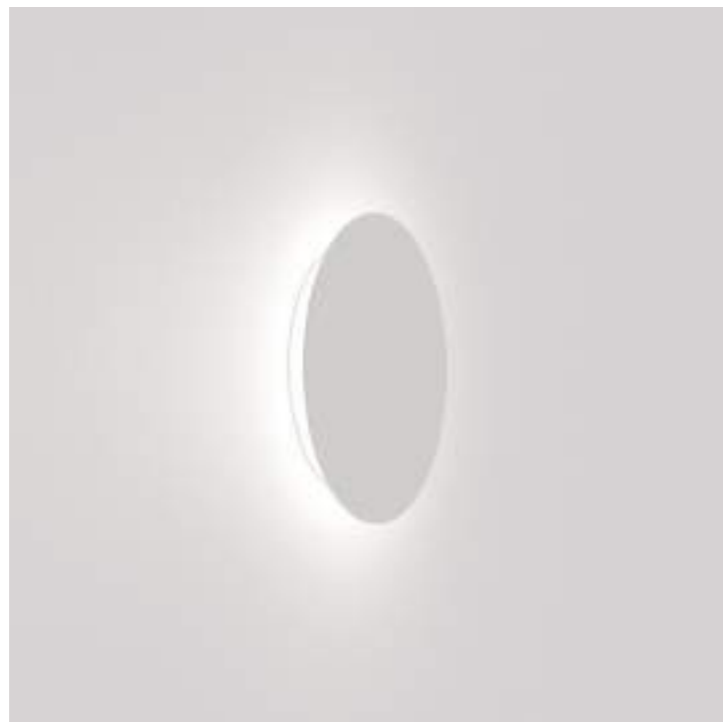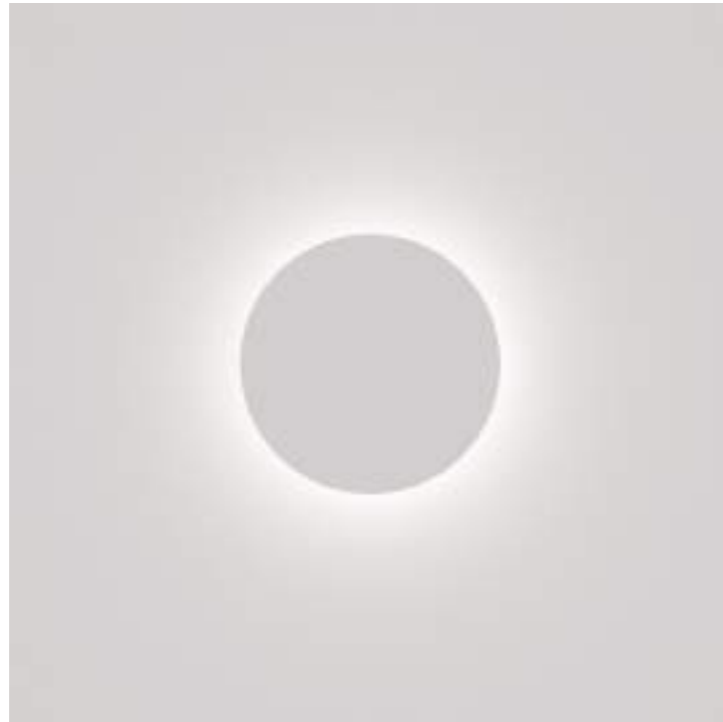

Luminary

- Luminária**
• L70 > 50000h
• MacAdam 3

Optic Óptica

- Opal diffuser

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
2263.927002AZ.x	2,4W	360°	90	2700K	106Lm	45Lm/W
2263.930002ZZ.x	2,4W	360°	90	3000K	111Lm	47Lm/W
2263.940002AZ.x	2,4W	360°	90	4000K	114Lm	48Lm/W

***on demand**



DOT_trk mag



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico


- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Profile Carril

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
6204.92701214.x	3x4,8W	14°	90	2700K	3x350Lm	73Lm/W
6204.92701239.x	3x4,8W	39°	90	2700K	3x350Lm	73Lm/W
6204.93001214.x	3x4,8W	14°	90	3000K	3x350Lm	73Lm/W
6204.93001239.x	3x4,8W	39°	90	3000K	3x350Lm	73Lm/W

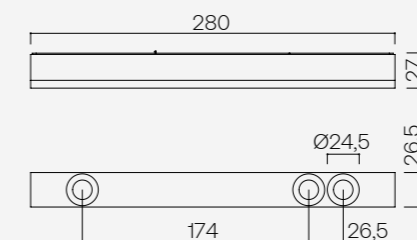


Structure

DESCRIPTION

With a vast array of design options at your fingertips, from corner profiles to recessed, surface, and pendant variations, you have the power to sculpt the atmosphere precisely to your vision.

DESCRIPCIÓN


Con una amplia gama de opciones de diseño a su alcance, desde perfiles de esquina hasta variaciones empotradas, de superficie y colgantes, tiene el poder de esculpir la atmósfera con precisión según su visión.

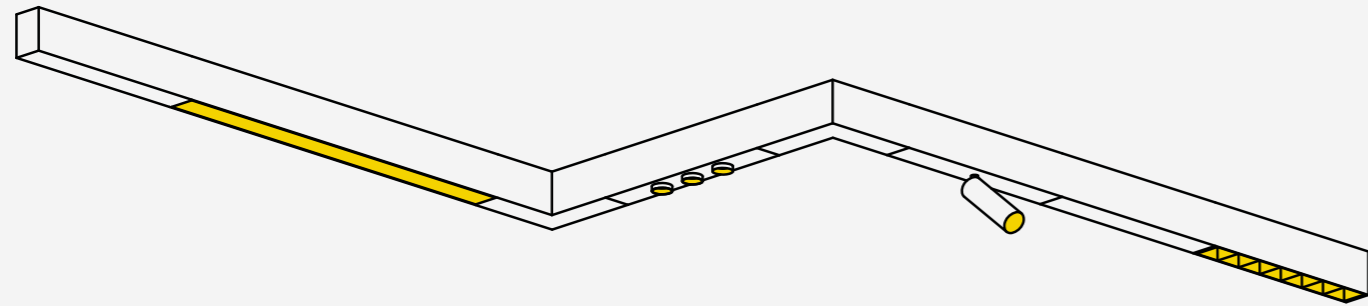



	Surface	Recessed	Pendant		Wall
Installation					
Layout					
Modules	UP/DOWN and DOWN LIGHTING Nit 120° Nit Corner 120° Blind Cover Blind Corner				
	DOWN LIGHTING Nixeven 35° / 65° PM 33_in fix 10° / 15° / 24° / 36° / 50° PM 29_p 14° / 39° PM 37_p 10° / 15° / 24° / 36° / 50° PM 25_in spot 14° / 39° PM 33_in spot 10° / 15° / 24° / 36° / 50° PM 55_in spot 25° / 43° / 60°				
Lighting	<input type="checkbox"/> CRI 80 <input type="checkbox"/> CRI 90		<input type="checkbox"/> CRI 80 <input type="checkbox"/> CRI 90		
Finishing	<input type="checkbox"/> ON-OFF <input type="checkbox"/> DALI		<input type="checkbox"/> ON-OFF <input type="checkbox"/> DALI		
	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Metallic <input type="checkbox"/> NCS		<input checked="" type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Metallic <input type="checkbox"/> NCS		

1800318-A0 - 240105

Nit Down Pendant

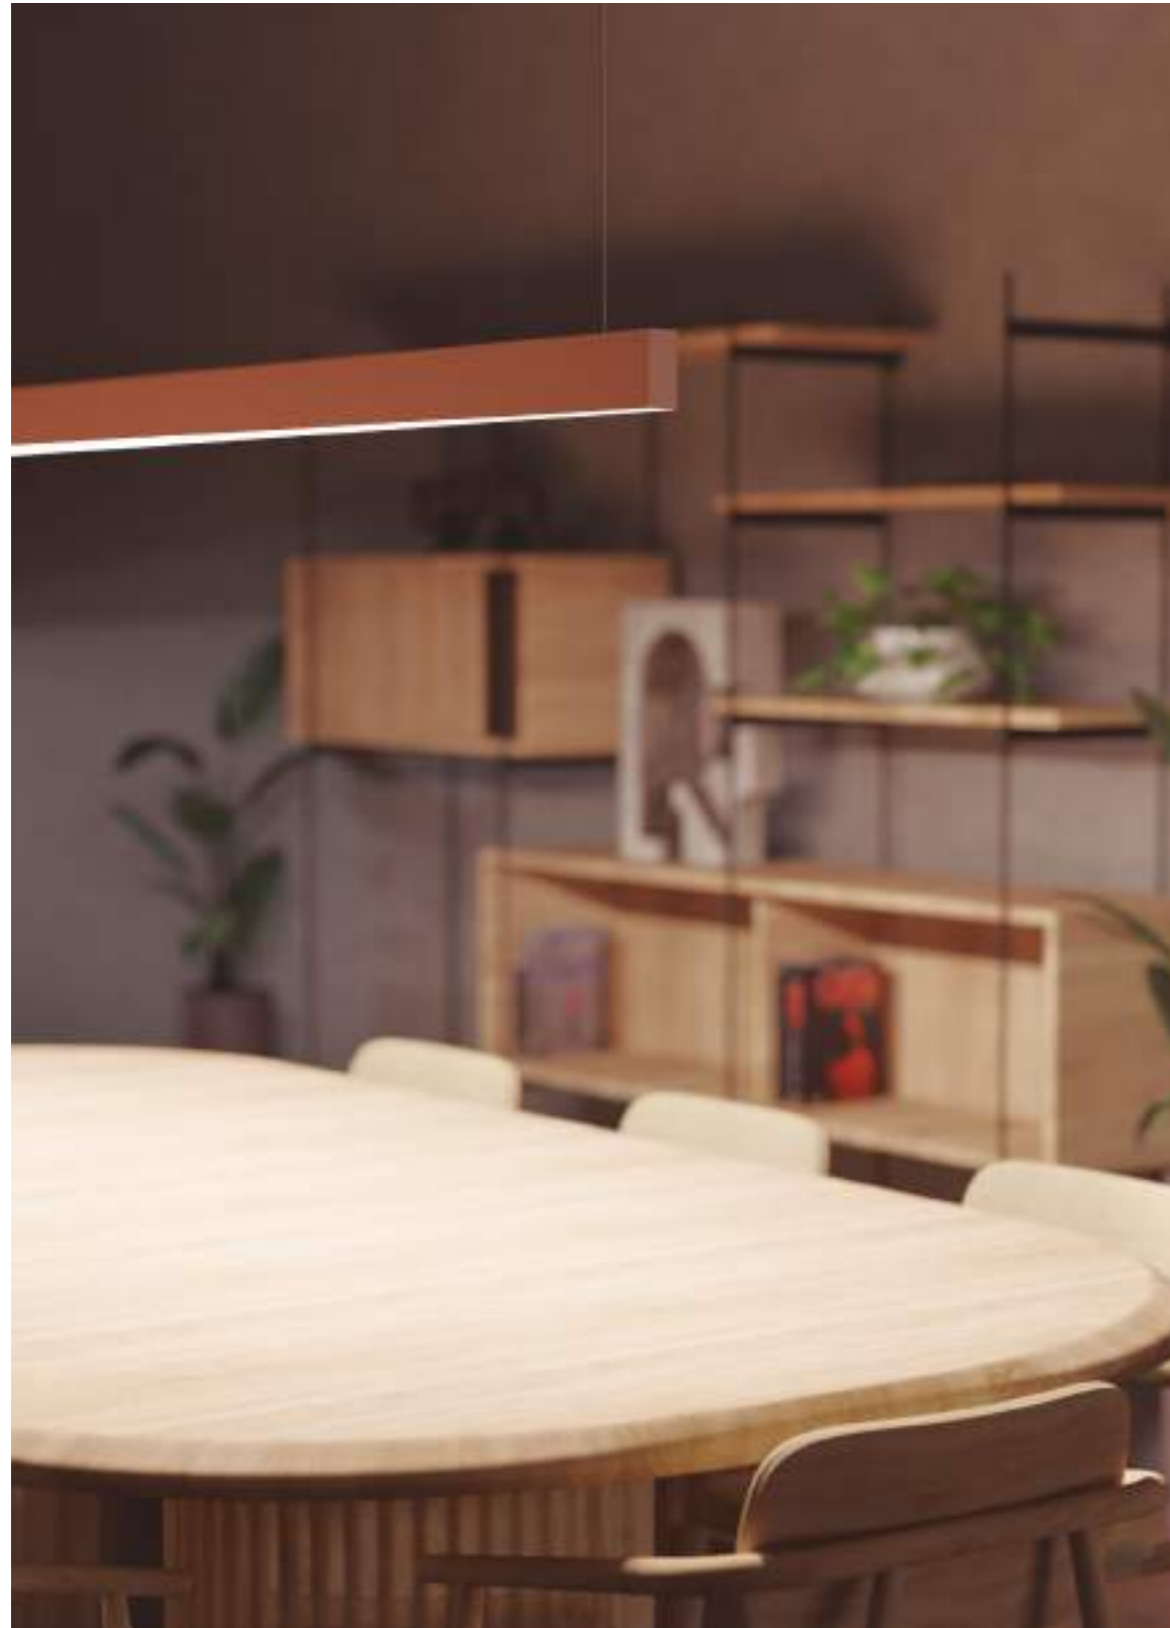

Nit Down Pendant

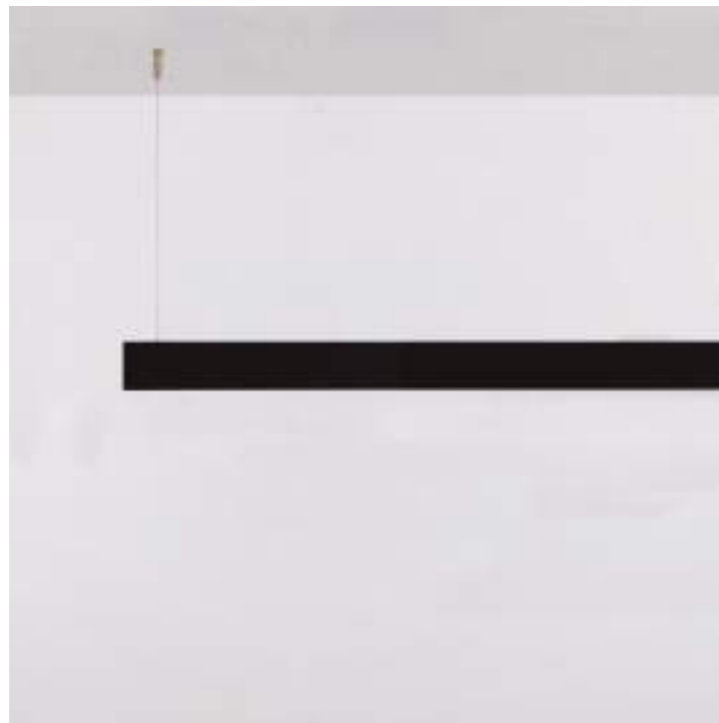

Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- PCB TRIDONIC
- Opal diffuser

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- 4m cables
Cables de 4m
- 890-2570 mm:
1h emergency kit
Kit de emergencia 1h

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nit Down Pendant IND 330 mm						
C1A0.827008C0.x	8,8W	120°	80	2700K	810Lm	93Lm/W
C1A0.830008C0.x	8,8W	120°	80	3000K	830Lm	95Lm/W
C1A0.840008C0.x	8,8W	120°	80	4000K	880Lm	100Lm/W
Nit Down Pendant IND 610 mm						
C2A0.827015C0.x	17,7W	120°	80	2700K	1620Lm	92Lm/W
C2A0.830015C0.x	17,7W	120°	80	3000K	1660Lm	94Lm/W
C2A0.840015C0.x	17,7W	120°	80	4000K	1760Lm	100Lm/W
Nit Down Pendant IND 890 mm						
C3A0.827023C0.x	26,5W	120°	80	2700K	2430Lm	92Lm/W
C3A0.830023C0.x	26,5W	120°	80	3000K	2485Lm	94Lm/W
C3A0.840023C0.x	26,5W	120°	80	4000K	2640Lm	100Lm/W
Nit Down Pendant IND 1170 mm						
C4A0.827031C0.x	35,4W	120°	80	2700K	3240Lm	92Lm/W
C4A0.830031C0.x	35,4W	120°	80	3000K	3315Lm	94Lm/W
C4A0.840031C0.x	35,4W	120°	80	4000K	3515Lm	100Lm/W
Nit Down Pendant IND 1450 mm						
C5A0.827038C0.x	44,2W	120°	80	2700K	4050Lm	92Lm/W
C5A0.830038C0.x	44,2W	120°	80	3000K	4145Lm	94Lm/W
C5A0.840038C0.x	44,2W	120°	80	4000K	4395Lm	100Lm/W
Nit Down Pendant IND 1730 mm						
C6A0.827046C0.x	53,1W	120°	80	2700K	4860Lm	92Lm/W
C6A0.830046C0.x	53,1W	120°	80	3000K	4975Lm	94Lm/W
C6A0.840046C0.x	53,1W	120°	80	4000K	5275Lm	100Lm/W
Nit Down Pendant IND 2010 mm						
C7A0.827054C0.x	61,9W	120°	80	2700K	5670Lm	92Lm/W
C7A0.830054C0.x	61,9W	120°	80	3000K	5805Lm	94Lm/W
C7A0.840054vC0.x	61,9W	120°	80	4000K	6155Lm	100Lm/W
Nit Down Pendant IND 2290 mm						
C8A0.827061C0.x	70,8W	120°	80	2700K	6480Lm	92Lm/W
C8A0.830061C0.x	70,8W	120°	80	3000K	6630Lm	94Lm/W
C8A0.840061C0.x	70,8W	120°	80	4000K	7035Lm	100Lm/W
Nit Down Pendant IND 2570 mm						
C9A0.827069C0.x	79,6W	120°	80	2700K	7290Lm	92Lm/W
C9A0.830069C0.x	79,6W	120°	80	3000K	7460Lm	94Lm/W
C9A0.840069C0.x	79,6W	120°	80	4000K	7915Lm	100Lm/W
Nit Down Pendant IND 2850 mm						
CXA0.827077C0.x	88,5W	120°	80	2700K	8105Lm	92Lm/W
CXA0.830077C0.x	88,5W	120°	80	3000K	8290Lm	94Lm/W
CXA0.840077C0.x	88,5W	120°	80	4000K	8795Lm	100Lm/W

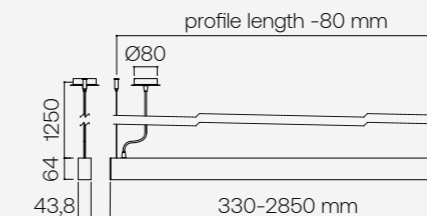

Nit UpDown Pendant



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- PCB TRIDONIC
- Opal diffuser

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- 4m cables
Cables de 4m
- 1450-2570 mm:
1h emergency kit
Kit de emergencia 1h

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nit UpDown Pendant IND 330 mm						
F1A0.827015C0.x	2x8,8W	120°	80	2700K	2x810Lm	93Lm/W
F1A0.830015C0.x	2x8,8W	120°	80	3000K	2x830Lm	95Lm/W
F1A0.840015C0.x	2x8,8W	120°	80	4000K	2x880Lm	100Lm/W
Nit UpDown Pendant IND 610 mm						
F2A0.827031C0.x	2x17,7W	120°	80	2700K	2x1620Lm	92Lm/W
F2A0.830031C0.x	2x17,7W	120°	80	3000K	2x1660Lm	94Lm/W
F2A0.840031C0.x	2x17,7W	120°	80	4000K	2x1760Lm	100Lm/W
Nit UpDown Pendant IND 890 mm						
F3A0.827046C0.x	2x26,5W	120°	80	2700K	2x2430Lm	92Lm/W
F3A0.830046C0.x	2x26,5W	120°	80	3000K	2x2485Lm	94Lm/W
F3A0.840046C0.x	2x26,5W	120°	80	4000K	2x2640Lm	100Lm/W
Nit UpDown Pendant IND 1170 mm						
F4A0.827061C0.x	2x35,4W	120°	80	2700K	2x3240Lm	92Lm/W
F4A0.830061C0.x	2x35,4W	120°	80	3000K	2x3315Lm	94Lm/W
F4A0.840061C0.x	2x35,4W	120°	80	4000K	2x3515Lm	100Lm/W
Nit UpDown Pendant IND 1450 mm						
F5A0.827077C0.x	2x44,2W	120°	80	2700K	2x4050Lm	92Lm/W
F5A0.830077C0.x	2x44,2W	120°	80	3000K	2x4145Lm	94Lm/W
F5A0.840077C0.x	2x44,2W	120°	80	4000K	2x4395Lm	100Lm/W
Nit UpDown Pendant IND 1730 mm						
F6A0.827092C0.x	2x53,1W	120°	80	2700K	2x4860Lm	92Lm/W
F6A0.830092C0.x	2x53,1W	120°	80	3000K	2x4975Lm	94Lm/W
F6A0.840092C0.x	2x53,1W	120°	80	4000K	2x5275Lm	100Lm/W
Nit UpDown Pendant IND 2010 mm						
F7A0.827108C0.x	2x61,9W	120°	80	2700K	2x5670Lm	92Lm/W
F7A0.830108C0.x	2x61,9W	120°	80	3000K	2x5805Lm	94Lm/W
F7A0.840108C0.x	2x61,9W	120°	80	4000K	2x6155Lm	100Lm/W
Nit UpDown Pendant IND 2290 mm						
F8A0.827123C0.x	2x70,8W	120°	80	2700K	2x6480Lm	92Lm/W
F8A0.830123C0.x	2x70,8W	120°	80	3000K	2x6630Lm	94Lm/W
F8A0.840123C0.x	2x70,8W	120°	80	4000K	2x7035Lm	100Lm/W
Nit UpDown Pendant IND 2570 mm						
F9A0.827138C0.x	2x79,6W	120°	80	2700K	2x7290Lm	92Lm/W
F9A0.830138C0.x	2x79,6W	120°	80	3000K	2x7460Lm	94Lm/W
F9A0.840138C0.x	2x79,6W	120°	80	4000K	2x7915Lm	100Lm/W
Nit UpDown Pendant IND 2850 mm						
FXA0.827154C0.x	2x88,5W	120°	80	2700K	2x8105Lm	92Lm/W
FXA0.830154C0.x	2x88,5W	120°	80	3000K	2x8290Lm	94Lm/W
FXA0.840154C0.x	2x88,5W	120°	80	4000K	2x8795Lm	100Lm/W

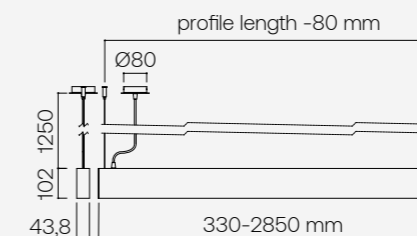

Nit Down Surface



Nit Down Surface



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- PCB TRIDONIC
- Opal diffuser

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- 890-2570 mm:
- 1h emergency kit
- Kit de emergencia 1h*

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R



Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas





Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nit Down Surface IND 330 mm						
A1A0.827008C0.x	8,8W	120°	80	2700K	810Lm	93Lm/W
A1A0.830008C0.x	8,8W	120°	80	3000K	830Lm	95Lm/W
A1A0.840008C0.x	8,8W	120°	80	4000K	880Lm	100Lm/W
Nit Down Surface IND 610 mm						
A2A0.827015C0.x	17,7W	120°	80	2700K	1620Lm	92Lm/W
A2A0.830015C0.x	17,7W	120°	80	3000K	1660Lm	94Lm/W
A2A0.840015C0.x	17,7W	120°	80	4000K	1760Lm	100Lm/W
Nit Down Surface IND 890 mm						
A3A0.827023C0.x	26,5W	120°	80	2700K	2430Lm	92Lm/W
A3A0.830023C0.x	26,5W	120°	80	3000K	2485Lm	94Lm/W
A3A0.840023C0.x	26,5W	120°	80	4000K	2640Lm	100Lm/W
Nit Down Surface IND 1170 mm						
A4A0.827031C0.x	35,4W	120°	80	2700K	3240Lm	92Lm/W
A4A0.830031C0.x	35,4W	120°	80	3000K	3315Lm	94Lm/W
A4A0.840031C0.x	35,4W	120°	80	4000K	3515Lm	100Lm/W
Nit Down Surface IND 1450 mm						
A5A0.827038C0.x	44,2W	120°	80	2700K	4050Lm	92Lm/W
A5A0.830038C0.x	44,2W	120°	80	3000K	4145Lm	94Lm/W
A5A0.840038C0.x	44,2W	120°	80	4000K	4395Lm	100Lm/W
Nit Down Surface IND 1730 mm						
A6A0.827046C0.x	53,1W	120°	80	2700K	4860Lm	92Lm/W
A6A0.830046C0.x	53,1W	120°	80	3000K	4975Lm	94Lm/W
A6A0.840046C0.x	53,1W	120°	80	4000K	5275Lm	100Lm/W
Nit Down Surface IND 2010 mm						
A7A0.827054C0.x	61,9W	120°	80	2700K	5670Lm	92Lm/W
A7A0.830054C0.x	61,9W	120°	80	3000K	5805Lm	94Lm/W
A7A0.840054C0.x	61,9W	120°	80	4000K	6155Lm	100Lm/W
Nit Down Surface IND 2290 mm						
A8A0.827061C0.x	70,8W	120°	80	2700K	6480Lm	92Lm/W
A8A0.830061C0.x	70,8W	120°	80	3000K	6630Lm	94Lm/W
A8A0.840061C0.x	70,8W	120°	80	4000K	7035Lm	100Lm/W
Nit Down Surface IND 2570 mm						
A9A0.827069C0.x	79,6W	120°	80	2700K	7290Lm	92Lm/W
A9A0.830069C0.x	79,6W	120°	80	3000K	7460Lm	94Lm/W
A9A0.840069C0.x	79,6W	120°	80	4000K	7915Lm	100Lm/W
Nit Down Surface IND 2850 mm						
AXA0.827077C0.x	88,5W	120°	80	2700K	8105Lm	92Lm/W
AXA0.830077C0.x	88,5W	120°	80	3000K	8290Lm	94Lm/W
AXA0.840077C0.x	88,5W	120°	80	4000K	8795Lm	100Lm/W

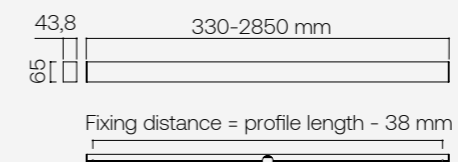

Nit Down Trimless



Nit Down Trimless

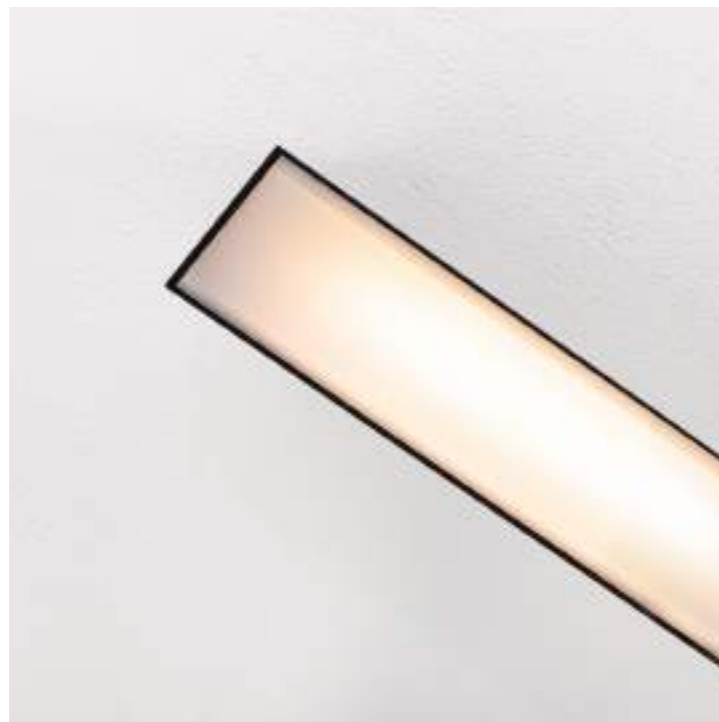

Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- PCB TRIDONIC
- Opal diffuser

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- 890-2570 mm:
- 1h emergency kit
- Kit de emergencia 1h*

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nit Down In Trimless IND 330 mm						
A1A6.827008C0.x	8,8W	120°	80	2700K	810Lm	93Lm/W
A1A6.830008C0.x	8,8W	120°	80	3000K	830Lm	95Lm/W
A1A6.840008C0.x	8,8W	120°	80	4000K	880Lm	100Lm/W
Nit Down In Trimless IND 610 mm						
A2A6.827015C0.x	17,7W	120°	80	2700K	1620Lm	92Lm/W
A2A6.830015C0.x	17,7W	120°	80	3000K	1660Lm	94Lm/W
A2A6.840015C0.x	17,7W	120°	80	4000K	1760Lm	100Lm/W
Nit Down In Trimless IND 890 mm						
A3A6.827023C0.x	26,5W	120°	80	2700K	2430Lm	92Lm/W
A3A6.830023C0.x	26,5W	120°	80	3000K	2485Lm	94Lm/W
A3A6.840023C0.x	26,5W	120°	80	4000K	2640Lm	100Lm/W
Nit Down In Trimless IND 1170 mm						
A4A6.827031C0.x	35,4W	120°	80	2700K	3240Lm	92Lm/W
A4A6.830031C0.x	35,4W	120°	80	3000K	3315Lm	94Lm/W
A4A6.840031C0.x	35,4W	120°	80	4000K	3515Lm	100Lm/W
Nit Down In Trimless IND 1450 mm						
A5A6.827038C0.x	44,2W	120°	80	2700K	4050Lm	92Lm/W
A5A6.830038C0.x	44,2W	120°	80	3000K	4145Lm	94Lm/W
A5A6.840038C0.x	44,2W	120°	80	4000K	4395Lm	100Lm/W
Nit Down In Trimless IND 1730 mm						
A6A6.827046C0.x	53,1W	120°	80	2700K	4860Lm	92Lm/W
A6A6.830046C0.x	53,1W	120°	80	3000K	4975Lm	94Lm/W
A6A6.840046C0.x	53,1W	120°	80	4000K	5275Lm	100Lm/W
Nit Down In Trimless IND 2010 mm						
A7A6.827054C0.x	61,9W	120°	80	2700K	5670Lm	92Lm/W
A7A6.830054C0.x	61,9W	120°	80	3000K	5805Lm	94Lm/W
A7A6.840054C0.x	61,9W	120°	80	4000K	6155Lm	100Lm/W
Nit Down In Trimless IND 2290 mm						
A8A6.827061C0.x	70,8W	120°	80	2700K	6480Lm	92Lm/W
A8A6.830061C0.x	70,8W	120°	80	3000K	6630Lm	94Lm/W
A8A6.840061C0.x	70,8W	120°	80	4000K	7035Lm	100Lm/W
Nit Down In Trimless IND 2570 mm						
A9A6.827069C0.x	79,6W	120°	80	2700K	7290Lm	92Lm/W
A9A6.830069C0.x	79,6W	120°	80	3000K	7460Lm	94Lm/W
A9A6.840069C0.x	79,6W	120°	80	4000K	7915Lm	100Lm/W
Nit Down In Trimless IND 2850 mm						
AXA6.827077C0.x	88,5W	120°	80	2700K	8105Lm	92Lm/W
AXA6.830077C0.x	88,5W	120°	80	3000K	8290Lm	94Lm/W
AXA6.840077C0.x	88,5W	120°	80	4000K	8795Lm	100Lm/W



Nit Wall



Nit Down Wall

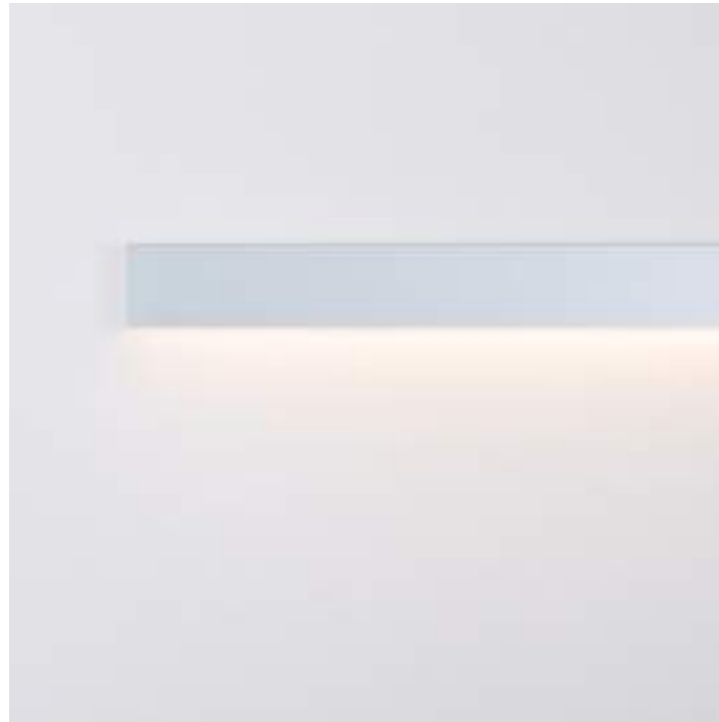

Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- PCB TRIDONIC
- Opal diffuser

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- 890-2570 mm:
- 1h emergency kit
- Kit de emergencia 1h*

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nit Down Wall IND 330mm						
B1A0.827008C0.x	8,8W	120°	80	2700K	810Lm	93Lm/W
B1A0.830008C0.x	8,8W	120°	80	3000K	830Lm	95Lm/W
B1A0.840008C0.x	8,8W	120°	80	4000K	880Lm	100Lm/W
Nit Down Wall IND 610 mm						
B2A0.827015C0.x	17,7W	120°	80	2700K	1620Lm	92Lm/W
B2A0.830015C0.x	17,7W	120°	80	3000K	1660Lm	94Lm/W
B2A0.840015C0.x	17,7W	120°	80	4000K	1760Lm	100Lm/W
Nit Down Wall IND 890 mm						
B3A0.827023C0.x	26,5W	120°	80	2700K	2430Lm	92Lm/W
B3A0.830023C0.x	26,5W	120°	80	3000K	2485Lm	94Lm/W
B3A0.840023C0.x	26,5W	120°	80	4000K	2640Lm	100Lm/W
Nit Down Wall IND 1170 mm						
B4A0.827031C0.x	35,4W	120°	80	2700K	3240Lm	92Lm/W
B4A0.830031C0.x	35,4W	120°	80	3000K	3315Lm	94Lm/W
B4A0.840031C0.x	35,4W	120°	80	4000K	3515Lm	100Lm/W
Nit Down Wall IND 1450 mm						
B5A0.827038C0.x	44,2W	120°	80	2700K	4050Lm	92Lm/W
B5A0.830038C0.x	44,2W	120°	80	3000K	4145Lm	94Lm/W
B5A0.840038C0.x	44,2W	120°	80	4000K	4395Lm	100Lm/W
Nit Down Wall IND 1730 mm						
B6A0.827046C0.x	53,1W	120°	80	2700K	4860Lm	92Lm/W
B6A0.830046C0.x	53,1W	120°	80	3000K	4975Lm	94Lm/W
B6A0.840046C0.x	53,1W	120°	80	4000K	5275Lm	100Lm/W
Nit Down Wall IND 2010 mm						
B7A0.827054C0.x	61,9W	120°	80	2700K	5670Lm	92Lm/W
B7A0.830054C0.x	61,9W	120°	80	3000K	5805Lm	94Lm/W
B7A0.840054C0.x	61,9W	120°	80	4000K	6155Lm	100Lm/W
Nit Down Wall IND 2290 mm						
B8A0.827061C0.x	70,8W	120°	80	2700K	6480Lm	92Lm/W
B8A0.830061C0.x	70,8W	120°	80	3000K	6630Lm	94Lm/W
B8A0.840061C0.x	70,8W	120°	80	4000K	7035Lm	100Lm/W
Nit Down Wall IND 2570 mm						
B9A0.827069C0.x	79,6W	120°	80	2700K	7290Lm	92Lm/W
B9A0.830069C0.x	79,6W	120°	80	3000K	7460Lm	94Lm/W
B9A0.840069C0.x	79,6W	120°	80	4000K	7915Lm	100Lm/W
Nit Down Wall IND 2850 mm						
BXA0.827077C0.x	88,5W	120°	80	2700K	8105Lm	92Lm/W
BXA0.830077C0.x	88,5W	120°	80	3000K	8290Lm	94Lm/W
BXA0.840077C0.x	88,5W	120°	80	4000K	8795Lm	100Lm/W

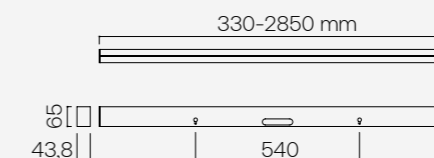

Nit UpDown Wall



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- PCB TRIDONIC
- Opal diffuser

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- 1450-2570 mm:
1h emergency kit
Kit de emergencia 1h

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales

NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R


Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nit UpDown Wall IND 330mm						
E1A0.827015C0.x	2x8,8W	120°	80	2700K	2x810Lm	93Lm/W
E1A0.830015C0.x	2x8,8W	120°	80	3000K	2x830Lm	95Lm/W
E1A0.840015C0.x	2x8,8W	120°	80	4000K	2x880Lm	100Lm/W
Nit UpDown Wall IND 610mm						
E2A0.827031C0.x	2x17,7W	120°	80	2700K	2x1620Lm	92Lm/W
E2A0.830031C0.x	2x17,7W	120°	80	3000K	2x1660Lm	94Lm/W
E2A0.840031C0.x	2x17,7W	120°	80	4000K	2x1760Lm	100Lm/W
Nit UpDown Wall IND 890mm						
E3A0.827046C0.x	2x26,5W	120°	80	2700K	2x2430Lm	92Lm/W
E3A0.830046C0.x	2x26,5W	120°	80	3000K	2x2485Lm	94Lm/W
E3A0.840046C0.x	2x26,5W	120°	80	4000K	2x2640Lm	100Lm/W
Nit UpDown Wall IND 1170mm						
E4A0.827061C0.x	2x35,4W	120°	80	2700K	2x3240Lm	92Lm/W
E4A0.830061C0.x	2x35,4W	120°	80	3000K	2x3315Lm	94Lm/W
E4A0.840061C0.x	2x35,4W	120°	80	4000K	2x3515Lm	100Lm/W
Nit UpDown Wall IND 1450mm						
E5A0.827077C0.x	2x44,2W	120°	80	2700K	2x4050Lm	92Lm/W
E5A0.830077C0.x	2x44,2W	120°	80	3000K	2x4145Lm	94Lm/W
E5A0.840077C0.x	2x44,2W	120°	80	4000K	2x4395Lm	100Lm/W
Nit UpDown Wall IND 1730mm						
E6A0.827092C0.x	2x53,1W	120°	80	2700K	2x4860Lm	92Lm/W
E6A0.830092C0.x	2x53,1W	120°	80	3000K	2x4975Lm	94Lm/W
E6A0.840092C0.x	2x53,1W	120°	80	4000K	2x5275Lm	100Lm/W
Nit UpDown Wall IND 2010mm						
E7A0.827108C0.x	2x61,9W	120°	80	2700K	2x5670Lm	92Lm/W
E7A0.830108C0.x	2x61,9W	120°	80	3000K	2x5805Lm	94Lm/W
E7A0.840108C0.x	2x61,9W	120°	80	4000K	2x6155Lm	100Lm/W
Nit UpDown Wall IND 2290mm						
E8A0.827123C0.x	2x70,8W	120°	80	2700K	2x6480Lm	92Lm/W
E8A0.830123C0.x	2x70,8W	120°	80	3000K	2x6630Lm	94Lm/W
E8A0.840123C0.x	2x70,8W	120°	80	4000K	2x7035Lm	100Lm/W
Nit UpDown Wall IND 2570mm						
E9A0.827138C0.x	2x79,6W	120°	80	2700K	2x7290Lm	92Lm/W
E9A0.830138C0.x	2x79,6W	120°	80	3000K	2x7460Lm	94Lm/W
E9A0.840138C0.x	2x79,6W	120°	80	4000K	2x7915Lm	100Lm/W
Nit UpDown Wall IND 2850mm						
EXA0.827154C0.x	2x88,5W	120°	80	2700K	2x8105Lm	92Lm/W
EXA0.830154C0.x	2x88,5W	120°	80	3000K	2x8290Lm	94Lm/W
EXA0.840154C0.x	2x88,5W	120°	80	4000K	2x8795Lm	100Lm/W

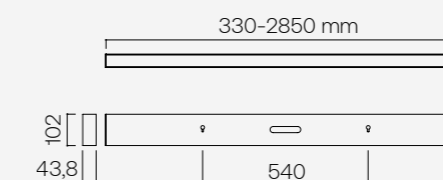

Nixeven Pendant



Nixeven Pendant



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- PCB TRIDONIC
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Accessories Accesorios

- 4m cables
Cables de 4m

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales



NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava


Downloads Descargas

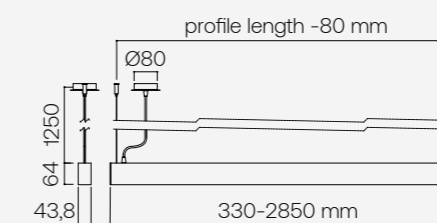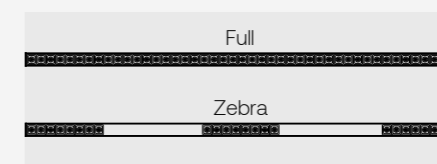

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nixeven Full Pend. IND 610 mm						
M2A0.82701135.x	12,7W	35°	80	2700K	1680Lm	133Lm/W
M2A0.82701165.x	12,7W	65°	80	2700K	1680Lm	133Lm/W
M2A0.83001535.x	17,4W	35°	80	3000K	2320Lm	134Lm/W
M2A0.83001565.x	17,4W	65°	80	3000K	2320Lm	134Lm/W
M2A0.84001535.x	17,4W	35°	80	4000K	2440Lm	141Lm/W
M2A0.84001565.x	17,4W	65°	80	4000K	2440Lm	141Lm/W
Nixeven Full Pend. IND 890 mm						
M3A0.82701635.x	19,1W	35°	80	2700K	2520Lm	132Lm/W
M3A0.82701665.x	19,1W	65°	80	2700K	2520Lm	132Lm/W
M3A0.83002335.x	26,2W	35°	80	3000K	3480Lm	133Lm/W
M3A0.83002365.x	26,2W	65°	80	3000K	3480Lm	133Lm/W
M3A0.84002335.x	26,2W	35°	80	4000K	3660Lm	140Lm/W
M3A0.84002365.x	26,2W	65°	80	4000K	3660Lm	140Lm/W
Nixeven Full Pend. IND 1170 mm						
M4A0.82702235.x	25,5W	35°	80	2700K	3360Lm	132Lm/W
M4A0.82702265.x	25,5W	65°	80	2700K	3360Lm	132Lm/W
M4A0.83003035.x	34,9W	35°	80	3000K	4640Lm	133Lm/W
M4A0.83003065.x	34,9W	65°	80	3000K	4640Lm	133Lm/W
M4A0.84003035.x	34,9W	35°	80	4000K	4880Lm	140Lm/W
M4A0.84003065.x	34,9W	65°	80	4000K	4880Lm	140Lm/W
Nixeven Full Pend. IND 1450 mm						
M5A0.82702735.x	31,9W	35°	80	2700K	4200Lm	132Lm/W
M5A0.82702765.x	31,9W	65°	80	2700K	4200Lm	132Lm/W
M5A0.83003835.x	43,7W	35°	80	3000K	5800Lm	133Lm/W
M5A0.83003865.x	43,7W	65°	80	3000K	5800Lm	133Lm/W
M5A0.84003835.x	43,7W	35°	80	4000K	6100Lm	140Lm/W
M5A0.84003865.x	43,7W	65°	80	4000K	6100Lm	140Lm/W
Nixeven Full Pend. IND 1730 mm						
M6A0.82703335.x	38,2W	35°	80	2700K	5040Lm	132Lm/W
M6A0.82703365.x	38,2W	65°	80	2700K	5040Lm	132Lm/W
M6A0.83004535.x	52,4W	35°	80	3000K	6960Lm	133Lm/W
M6A0.83004565.x	52,4W	65°	80	3000K	6960Lm	133Lm/W
M6A0.84004535.x	52,4W	35°	80	4000K	7320Lm	140Lm/W
M6A0.84004565.x	52,4W	65°	80	4000K	7320Lm	140Lm/W
Nixeven Full Pend. IND 2010 mm						
M7A0.82703935.x	44,6W	35°	80	2700K	5880Lm	132Lm/W
M7A0.82703965.x	44,6W	65°	80	2700K	5880Lm	132Lm/W
M7A0.83005335.x	61,1W	35°	80	3000K	8120Lm	133Lm/W
M7A0.83005365.x	61,1W	65°	80	3000K	8120Lm	133Lm/W
M7A0.84005335.x	61,1W	35°	80	4000K	8540Lm	140Lm/W
M7A0.84005365.x	61,1W	65°	80	4000K	8540Lm	140Lm/W
Nixeven Full Pend. IND 2290 mm						
M8A0.82704435.x	51W	35°	80	2700K	6720Lm	132Lm/W
M8A0.82704465.x	51W	65°	80	2700K	6720Lm	132Lm/W
M8A0.83006135.x	69,9W	35°	80	3000K	9280Lm	133Lm/W
M8A0.83006165.x	69,9W	65°	80	3000K	9280Lm	133Lm/W
M8A0.84006135.x	69,9W	35°	80	4000K	9760Lm	140Lm/W
M8A0.84006165.x	69,9W	65°	80	4000K	9760Lm	140Lm/W
Nixeven Full Pend. IND 2570 mm						
M9A0.82705035.x	57,4W	35°	80	2700K	7560Lm	132Lm/W
M9A0.82705065.x	57,4W	65°	80	2700K	7560Lm	132Lm/W
M9A0.83006835.x	78,6W	35°	80	3000K	10440Lm	133Lm/W
M9A0.83006865.x	78,6W	65°	80	3000K	10440Lm	133Lm/W
M9A0.84006835.x	78,6W	35°	80	4000K	10980Lm	140Lm/W
M9A0.84006865.x	78,6W	65°	80	4000K	10980Lm	140Lm/W
Nixeven Full Pend. IND 2850 mm						
MXA0.82705535.x	63,8W	35°	80	2700K	8400Lm	132Lm/W
MXA0.82705565.x	63,8W	65°	80	2700K	8400Lm	132Lm/W
MXA0.83007635.x	87,4W	35°	80	3000K	11600Lm	133Lm/W
MXA0.83007665.x	87,4W	65°	80	3000K	11600Lm	133Lm/W
MXA0.84007635.x	87,4W	35°	80	4000K	12200Lm	140Lm/W
MXA0.84007665.x	87,4W	65°	80	4000K	12200Lm	140Lm/W

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nixeven Zebra Pend. IND 890 mm						
O3A0.82701135.x	12,7W	35°	80	2700K	1680Lm	133Lm/W
O3A0.82701165.x	12,7W	65°	80	2700K	1680Lm	133Lm/W
O3A0.83001535.x	17,4W	35°	80	3000K	2320Lm	134Lm/W
O3A0.83001565.x	17,4W	65°	80	3000K	2320Lm	134Lm/W
O3A0.84001535.x	17,4W	35°	80	4000K	2440Lm	141Lm/W
O3A0.84001565.x	17,4W	65°	80	4000K	2440Lm	141Lm/W
Nixeven Zebra Pend. IND 1450 mm						
O5A0.82701635.x	19,1W	35°	80	2700K	2520Lm	132Lm/W
O5A0.82701665.x	19,1W	65°	80	2700K	2520Lm	132Lm/W
O5A0.83002335.x	26,2W	35°	80	3000K	3480Lm	133Lm/W
O5A0.83002365.x	26,2W	65°	80	3000K	3480Lm	133Lm/W
O5A0.84002335.x	26,2W	35°	80	4000K	3660Lm	140Lm/W
O5A0.84002365.x	26,2W	65°	80	4000K	3660Lm	140Lm/W
Nixeven Zebra Pend. IND 2010 mm						
O7A0.82702235.x	25,5W	35°	80	2700K	3360Lm	132Lm/W
O7A0.82702265.x	25,5W	65°	80	2700K	3360Lm	132Lm/W
O7A0.83003035.x	34,9W	35°	80	3000K	4640Lm	133Lm/W
O7A0.83003065.x	34,9W	65°	80	3000K	4640Lm	133Lm/W
O7A0.84003035.x	34,9W	35°	80	4000K	4880Lm	140Lm/W
O7A0.84003065.x	34,9W	65°	80	4000K	4880Lm	140Lm/W
Nixeven Zebra Pend. IND 2570 mm						
O9A0.82702735.x	31,9W	35°	80	2700K	4200Lm	132Lm/W
O9A0.82702765.x	31,9W	65°	80	2700K	4200Lm	132Lm/W
O9A0.83003835.x	43,7W	35°	80	3000K	5800Lm	133Lm/W
O9A0.83003865.x	43,7W	65°	80	3000K	5800Lm	133Lm/W
O9A0.84003835.x	43,7W	35°	80	4000K	6100Lm	140Lm/W
O9A0.84003865.x	43,7W	65°	80	4000K	6100Lm	140Lm/W

Nixeven Surface



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- PCB TRIDONIC
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales



NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas



334 - 2854

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nixeven Full Surf. IND 610 mm						
L2A0.82701135.x	12,7W	35°	80	2700K	1680Lm	133Lm/W
L2A0.82701165.x	12,7W	65°	80	2700K	1680Lm	133Lm/W
L2A0.83001535.x	17,4W	35°	80	3000K	2320Lm	134Lm/W
L2A0.83001565.x	17,4W	65°	80	3000K	2320Lm	134Lm/W
L2A0.84001535.x	17,4W	35°	80	4000K	2440Lm	141Lm/W
L2A0.84001565.x	17,4W	65°	80	4000K	2440Lm	141Lm/W
Nixeven Full Surf. IND 890 mm						
L3A0.82701635.x	19,1W	35°	80	2700K	2520Lm	132Lm/W
L3A0.82701665.x	19,1W	65°	80	2700K	2520Lm	132Lm/W
L3A0.83002335.x	26,2W	35°	80	3000K	3480Lm	133Lm/W
L3A0.83002365.x	26,2W	65°	80	3000K	3480Lm	133Lm/W
L3A0.84002335.x	26,2W	35°	80	4000K	3660Lm	140Lm/W
L3A0.84002365.x	26,2W	65°	80	4000K	3660Lm	140Lm/W
Nixeven Full Surf. IND 1170 mm						
L4A0.82702235.x	25,5W	35°	80	2700K	3360Lm	132Lm/W
L4A0.82702265.x	25,5W	65°	80	2700K	3360Lm	132Lm/W
L4A0.83003035.x	34,9W	35°	80	3000K	4640Lm	133Lm/W
L4A0.83003065.x	34,9W	65°	80	3000K	4640Lm	133Lm/W
L4A0.84003035.x	34,9W	35°	80	4000K	4880Lm	140Lm/W
L4A0.84003065.x	34,9W	65°	80	4000K	4880Lm	140Lm/W
Nixeven Full Surf. IND 1450 mm						
L5A0.82702735.x	31,9W	35°	80	2700K	4200Lm	132Lm/W
L5A0.82702765.x	31,9W	65°	80	2700K	4200Lm	132Lm/W
L5A0.83003835.x	43,7W	35°	80	3000K	5800Lm	133Lm/W
L5A0.83003865.x	43,7W	65°	80	3000K	5800Lm	133Lm/W
L5A0.84003835.x	43,7W	35°	80	4000K	6100Lm	140Lm/W
L5A0.84003865.x	43,7W	65°	80	4000K	6100Lm	140Lm/W
Nixeven Full Surf. IND 1730 mm						
L6A0.82703335.x	38,2W	35°	80	2700K	5040Lm	132Lm/W
L6A0.82703365.x	38,2W	65°	80	2700K	5040Lm	132Lm/W
L6A0.83004535.x	52,4W	35°	80	3000K	6960Lm	133Lm/W
L6A0.83004565.x	52,4W	65°	80	3000K	6960Lm	133Lm/W
L6A0.84004535.x	52,4W	35°	80	4000K	7320Lm	140Lm/W
L6A0.84004565.x	52,4W	65°	80	4000K	7320Lm	140Lm/W
Nixeven Full Surf. IND 2010 mm						
L7A0.82703935.x	44,6W	35°	80	2700K	5880Lm	132Lm/W
L7A0.82703965.x	44,6W	65°	80	2700K	5880Lm	132Lm/W
L7A0.83005335.x	61,1W	35°	80	3000K	8120Lm	133Lm/W
L7A0.83005365.x	61,1W	65°	80	3000K	8120Lm	133Lm/W
L7A0.84005335.x	61,1W	35°	80	4000K	8540Lm	140Lm/W
L7A0.84005365.x	61,1W	65°	80	4000K	8540Lm	140Lm/W
Nixeven Full Surf. IND 2290 mm						
L8A0.82704435.x	51W	35°	80	2700K	6720Lm	132Lm/W
L8A0.82704465.x	51W	65°	80	2700K	6720Lm	132Lm/W
L8A0.83006135.x	69,9W	35°	80	3000K	9280Lm	133Lm/W
L8A0.83006165.x	69,9W	65°	80	3000K	9280Lm	133Lm/W
L8A0.84006135.x	69,9W	35°	80	4000K	9760Lm	140Lm/W
L8A0.84006165.x	69,9W	65°	80	4000K	9760Lm	140Lm/W
Nixeven Full Surf. IND 2570 mm						
L9A0.82705035.x	57,4W	35°	80	2700K	7560Lm	132Lm/W
L9A0.82705065.x	57,4W	65°	80	2700K	7560Lm	132Lm/W
L9A0.83006835.x	78,6W	35°	80	3000K	10440Lm	133Lm/W
L9A0.83006865.x	78,6W	65°	80	3000K	10440Lm	133Lm/W
L9A0.84006835.x	78,6W	35°	80	4000K	10980Lm	140Lm/W
L9A0.84006865.x	78,6W	65°	80	4000K	10980Lm	140Lm/W
Nixeven Full Surf. IND 2850 mm						
LXA0.82705535.x	63,8W	35°	80	2700K	8400Lm	132Lm/W
LXA0.82705565.x	63,8W	65°	80	2700K	8400Lm	132Lm/W
LXA0.83007635.x	87,4W	35°	80	3000K	11600Lm	133Lm/W
LXA0.83007665.x	87,4W	65°	80	3000K	11600Lm	133Lm/W
LXA0.84007635.x	87,4W	35°	80	4000K	12200Lm	140Lm/W
LXA0.84007665.x	87,4W	65°	80	4000K	12200Lm	140Lm/W

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nixeven Zebra Surf. IND 890 mm						
N3A0.82701135.x	12,7W	35°	80	2700K	1680Lm	133Lm/W
N3A0.82701165.x	12,7W	65°	80	2700K	1680Lm	133Lm/W
N3A0.83001535.x	17,4W	35°	80	3000K	2320Lm	134Lm/W
N3A0.83001565.x	17,4W	65°	80	3000K	2320Lm	134Lm/W
N3A0.84001535.x	17,4W	35°	80	4000K	2440Lm	141Lm/W
N3A0.84001565.x	17,4W	65°	80	4000K	2440Lm	141Lm/W
Nixeven Zebra Surf. IND 1450 mm						
N5A0.82701635.x	19,1W	35°	80	2700K	2520Lm	132Lm/W
N5A0.82701665.x	19,1W	65°	80	2700K	2520Lm	132Lm/W
N5A0.83002335.x	26,2W	35°	80	3000K	3480Lm	133Lm/W
N5A0.83002365.x	26,2W	65°	80	3000K	3480Lm	133Lm/W
N5A0.84002335.x	26,2W	35°	80	4000K	3660Lm	140Lm/W
N5A0.84002365.x	26,2W	65°	80	4000K	3660Lm	140Lm/W
Nixeven Zebra Surf. IND 2010 mm						
N7A0.82702235.x	25,5W	35°	80	2700K	3360Lm	132Lm/W
N7A0.82702265.x	25,5W	65°	80	2700K	3360Lm	132Lm/W
N7A0.83003035.x	34,9W	35°	80	3000K	4640Lm	133Lm/W
N7A0.83003065.x	34,9W	65°	80	3000K	4640Lm	133Lm/W
N7A0.84003035.x	34,9W	35°	80	4000K	4880Lm	140Lm/W
N7A0.84003065.x	34,9W	65°	80	4000K	4880Lm	140Lm/W
Nixeven Zebra Surf. IND 2570 mm						
N9A0.82702735.x	31,9W	35°	80	2700K	4200Lm	132Lm/W
N9A0.82702765.x	31,9W	65°	80	2700K	4200Lm	132Lm/W
N9A0.83003835.x	43,7W	35°	80	3000K	5800Lm	133Lm/W
N9A0.83003865.x	43,7W	65°	80	3000K	5800Lm	133Lm/W
N9A0.84003835.x	43,7W	35°	80	4000K	6100Lm	140Lm/W
N9A0.84003865.x	43,7W	65°	80	4000K	6100Lm	140Lm/W

Nixeven Trimless



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- PCB TRIDONIC
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Basic finishes

Acabados básicos

- Black
- White

Special finishes

Acabados especiales


NCS

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Gun Metal
- Bronze
- Brushed Copper
- Old Silver
- Cava

Downloads Descargas

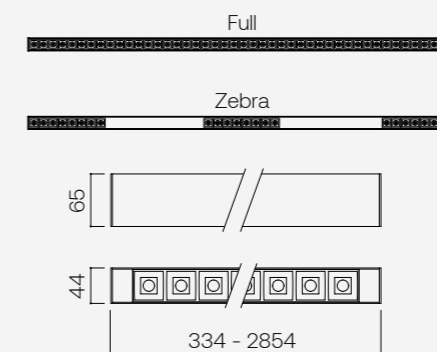

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nixeven Full In Trimless IND 610 mm						
L2A6.82701135.x	12,7W	35°	80	2700K	1680Lm	133Lm/W
L2A6.82701165.x	12,7W	65°	80	2700K	1680Lm	133Lm/W
L2A6.83001535.x	17,4W	35°	80	3000K	2320Lm	134Lm/W
L2A6.83001565.x	17,4W	65°	80	3000K	2320Lm	134Lm/W
L2A6.84001535.x	17,4W	35°	80	4000K	2440Lm	141Lm/W
L2A6.84001565.x	17,4W	65°	80	4000K	2440Lm	141Lm/W
Nixeven Full In Trimless IND 890 mm						
L3A6.82701635.x	19,1W	35°	80	2700K	2520Lm	132Lm/W
L3A6.82701665.x	19,1W	65°	80	2700K	2520Lm	132Lm/W
L3A6.83002335.x	26,2W	35°	80	3000K	3480Lm	133Lm/W
L3A6.83002365.x	26,2W	65°	80	3000K	3480Lm	133Lm/W
L3A6.84002335.x	26,2W	35°	80	4000K	3660Lm	140Lm/W
L3A6.84002365.x	26,2W	65°	80	4000K	3660Lm	140Lm/W
Nixeven Full In Trimless IND 1170 mm						
L4A6.82702235.x	25,5W	35°	80	2700K	3360Lm	132Lm/W
L4A6.82702265.x	25,5W	65°	80	2700K	3360Lm	132Lm/W
L4A6.83003035.x	34,9W	35°	80	3000K	4640Lm	133Lm/W
L4A6.83003065.x	34,9W	65°	80	3000K	4640Lm	133Lm/W
L4A6.84003035.x	34,9W	35°	80	4000K	4880Lm	140Lm/W
L4A6.84003065.x	34,9W	65°	80	4000K	4880Lm	140Lm/W
Nixeven Full In Trimless IND 1450 mm						
L5A6.82702735.x	31,9W	35°	80	2700K	4200Lm	132Lm/W
L5A6.82702765.x	31,9W	65°	80	2700K	4200Lm	132Lm/W
L5A6.83003835.x	43,7W	35°	80	3000K	5800Lm	133Lm/W
L5A6.83003865.x	43,7W	65°	80	3000K	5800Lm	133Lm/W
L5A6.84003835.x	43,7W	35°	80	4000K	6100Lm	140Lm/W
L5A6.84003865.x	43,7W	65°	80	4000K	6100Lm	140Lm/W
Nixeven Full In Trimless IND 1730 mm						
L6A6.82703335.x	38,2W	35°	80	2700K	5040Lm	132Lm/W
L6A6.82703365.x	38,2W	65°	80	2700K	5040Lm	132Lm/W
L6A6.83004535.x	52,4W	35°	80	3000K	6960Lm	133Lm/W
L6A6.83004565.x	52,4W	65°	80	3000K	6960Lm	133Lm/W
L6A6.84004535.x	52,4W	35°	80	4000K	7320Lm	140Lm/W
L6A6.84004565.x	52,4W	65°	80	4000K	7320Lm	140Lm/W
Nixeven Full In Trimless IND 2010 mm						
L7A6.82703935.x	44,6W	35°	80	2700K	5880Lm	132Lm/W
L7A6.82703965.x	44,6W	65°	80	2700K	5880Lm	132Lm/W
L7A6.83005335.x	61,1W	35°	80	3000K	8120Lm	133Lm/W
L7A6.83005365.x	61,1W	65°	80	3000K	8120Lm	133Lm/W
L7A6.84005335.x	61,1W	35°	80	4000K	8540Lm	140Lm/W
L7A6.84005365.x	61,1W	65°	80	4000K	8540Lm	140Lm/W
Nixeven Full In Trimless IND 2290 mm						
L8A6.82704435.x	51W	35°	80	2700K	6720Lm	132Lm/W
L8A6.82704465.x	51W	65°	80	2700K	6720Lm	132Lm/W
L8A6.83006135.x	69,9W	35°	80	3000K	9280Lm	133Lm/W
L8A6.83006165.x	69,9W	65°	80	3000K	9280Lm	133Lm/W
L8A6.84006135.x	69,9W	35°	80	4000K	9760Lm	140Lm/W
L8A6.84006165.x	69,9W	65°	80	4000K	9760Lm	140Lm/W
Nixeven Full In Trimless IND 2570 mm						
L9A6.82705035.x	57,4W	35°	80	2700K	7560Lm	132Lm/W
L9A6.82705065.x	57,4W	65°	80	2700K	7560Lm	132Lm/W
L9A6.83006835.x	78,6W	35°	80	3000K	10440Lm	133Lm/W
L9A6.83006865.x	78,6W	65°	80	3000K	10440Lm	133Lm/W
L9A6.84006835.x	78,6W	35°	80	4000K	10980Lm	140Lm/W
L9A6.84006865.x	78,6W	65°	80	4000K	10980Lm	140Lm/W
Nixeven Full In Trimless IND 2850 mm						
LXA6.82705535.x	63,8W	35°	80	2700K	8400Lm	132Lm/W
LXA6.82705565.x	63,8W	65°	80	2700K	8400Lm	132Lm/W
LXA6.83007635.x	87,4W	35°	80	3000K	11600Lm	133Lm/W
LXA6.83007665.x	87,4W	65°	80	3000K	11600Lm	133Lm/W
LXA6.84007635.x	87,4W	35°	80	4000K	12200Lm	140Lm/W
LXA6.84007665.x	87,4W	65°	80	4000K	12200Lm	140Lm/W

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nixeven Zebra In Trimless IND 890 mm						
N3A6.82701135.x	12,7W	35°	80	2700K	1680Lm	133Lm/W
N3A6.82701165.x	12,7W	65°	80	2700K	1680Lm	133Lm/W
N3A6.83001535.x	17,4W	35°	80	3000K	2320Lm	134Lm/W
N3A6.83001565.x	17,4W	65°	80	3000K	2320Lm	134Lm/W
N3A6.84001535.x	17,4W	35°	80	4000K	2440Lm	141Lm/W
N3A6.84001565.x	17,4W	65°	80	4000K	2440Lm	141Lm/W
Nixeven Zebra In Trimless IND 1450 mm						
N5A6.82701635.x	19,1W	35°	80	2700K	2520Lm	132Lm/W
N5A6.82701665.x	19,1W	65°	80	2700K	2520Lm	132Lm/W
N5A6.83002335.x	26,2W	35°	80	3000K	3480Lm	133Lm/W
N5A6.83002365.x	26,2W	65°	80	3000K	3480Lm	133Lm/W
N5A6.84002335.x	26,2W	35°	80	4000K	3660Lm	140Lm/W
N5A6.84002365.x	26,2W	65°	80	4000K	3660Lm	140Lm/W
Nixeven Zebra In Trimless IND 2010 mm						
N7A6.82702235.x	25,5W	35°	80	2700K	3360Lm	132Lm/W
N7A6.82702265.x	25,5W	65°	80	2700K	3360Lm	132Lm/W
N7A6.83003035.x	34,9W	35°	80	3000K	4640Lm	133Lm/W
N7A6.83003065.x	34,9W	65°	80	3000K	4640Lm	133Lm/W
N7A6.84003035.x	34,9W	35°	80	4000K	4880Lm	140Lm/W
N7A6.84003065.x	34,9W	65°	80	4000K	4880Lm	140Lm/W
Nixeven Zebra In Trimless IND 2570 mm						
N9A6.82702735.x	31,9W	35°	80	2700K	4200Lm	132Lm/W
N9A6.82702765.x	31,9W	65°	80	2700K	4200Lm	132Lm/W
N9A6.83003835.x	43,7W	35°	80	3000K	5800Lm	133Lm/W
N9A6.83003865.x	43,7W	65°	80	3000K	5800Lm	133Lm/W
N9A6.84003835.x	43,7W	35°	80	4000K	6100Lm	140Lm/W
N9A6.84003865.x	43,7W	65°	80	4000K	6100Lm	140Lm/W

LIV_baliza

by Bruno de Avila




A pure and functional outdoor design, conceived to create a comfortable and warm atmosphere.

Un diseño de exterior puro y funcional, concebido para crear una atmósfera confortable y cálida.



LIV_baliza

by Bruno de Avila



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Lens

Driver

- Integrated - Integrado

Voltage Voltaje

- 24VDC

Protection Protección

- IP65

Basic finishes

Acabados básicos

- Black
- White

Downloads Descargas



400 mm


Cod.	W	Beam angle	CRI	K	Lm	Efficiency
3210.92700410.x	4,5W	180°	90	2700K	211Lm	47Lm/W
3210.93000410.x	4,5W	180°	90	3000K	219Lm	49Lm/W
3210.94000410.x	4,5W	180°	90	4000K	230Lm	52Lm/W

600 mm

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
3211.92700410.x	4,5W	180°	90	2700K	211Lm	47Lm/W
3211.93000410.x	4,5W	180°	90	3000K	219Lm	49Lm/W
3211.94000410.x	4,5W	180°	90	4000K	230Lm	52Lm/W

800 mm

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
3212.92700410.x	4,5W	180°	90	2700K	211Lm	47Lm/W
3212.93000410.x	4,5W	180°	90	3000K	219Lm	49Lm/W
3212.94000410.x	4,5W	180°	90	4000K	230Lm	52Lm/W

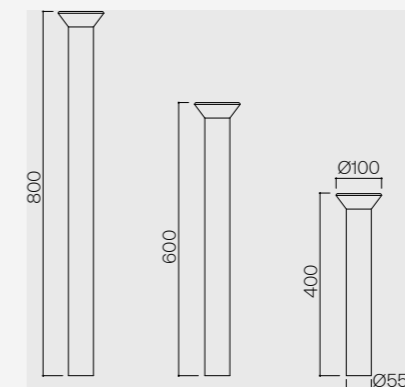


PM 111_baliza

by Her design team



PM 111_baliza



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 24VDC

Protection Protección

- IP54

Accessories Accesorios

- Honeycomb (included)
Panaj de abeja (incluido)

Basic finishes

Acabados básicos

- Black
- White

Downloads Descargas



200 mm


Cod.	W	Beam angle	CRI	K	Lm	Efficiency
3207.927004HA.x	4,5W	HC15°	90	2700K	375Lm	84Lm/W
3207.927004HC.x	4,5W	HC36°	90	2700K	375Lm	84Lm/W
3207.930004HA.x	4,5W	HC15°	90	3000K	395Lm	88Lm/W
3207.930004HC.x	4,5W	HC36°	90	3000K	395Lm	88Lm/W
3207.940004HA.x	4,5W	HC15°	90	4000K	420Lm	94Lm/W
3207.940004HC.x	4,5W	HC36°	90	4000K	420Lm	94Lm/W

400 mm


Cod.	W	Beam angle	CRI	K	Lm	Efficiency
3208.927004HA.x	4,5W	HC15°	90	2700K	375Lm	84Lm/W
3208.927004HC.x	4,5W	HC36°	90	2700K	375Lm	84Lm/W
3208.930004HA.x	4,5W	HC15°	90	3000K	395Lm	88Lm/W
3208.930004HC.x	4,5W	HC36°	90	3000K	395Lm	88Lm/W
3208.940004HA.x	4,5W	HC15°	90	4000K	420Lm	94Lm/W
3208.940004HC.x	4,5W	HC36°	90	4000K	420Lm	94Lm/W

600 mm

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
3209.927004HA.x	4,5W	HC15°	90	2700K	375Lm	84Lm/W
3209.927004HC.x	4,5W	HC36°	90	2700K	375Lm	84Lm/W
3209.930004HA.x	4,5W	HC15°	90	3000K	395Lm	88Lm/W
3209.930004HC.x	4,5W	HC36°	90	3000K	395Lm	88Lm/W
3209.940004HA.x	4,5W	HC15°	90	4000K	420Lm	94Lm/W
3209.940004HC.x	4,5W	HC36°	90	4000K	420Lm	94Lm/W

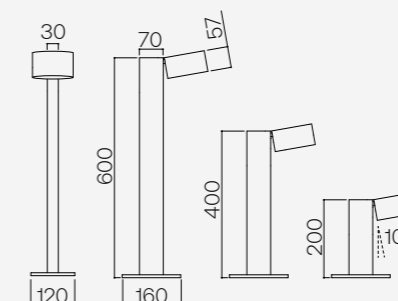

PM 111_on fix ip



270 — Outdoor

Luminary

- Luminária**
- L70 > 35000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- DOB VOSSLOH-SCHWABE
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT

Protection Protección

- IP54

Basic finishes


Acabados básicos

- Black
- White

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
3203.92701336.x	15,6W	36°	90	2700K	1020Lm	66Lm/W
3203.93001336.x	15,6W	36°	90	3000K	1084Lm	70Lm/W



Tar

Magnetic Track

DESCRIPTION

Low voltage electrified rail system with luminaire anchorage using a high power magnetic system.

Optimized design to ensure constant tension in lengths up to 50m. Simple and elegant design.

Available in surface, pendant and recessed version. Availability of DALI system without changing track.


DESCRIPCIÓN

Sistema de carril electrificado de bajo voltaje con anclaje de las luminarias mediante un sistema magnético de gran sujeción.


Diseño optimizado para asegurar una tensión constante en longitudes de hasta 50m. De diseño simple y elegante.

Disponible en versión de superficie, suspensión y empotrar. Disponibilidad de sistema DALI sin necesidad de cambiar carril.


MECHANICAL INSTALLATION - INSTALACIÓN MECÁNICA

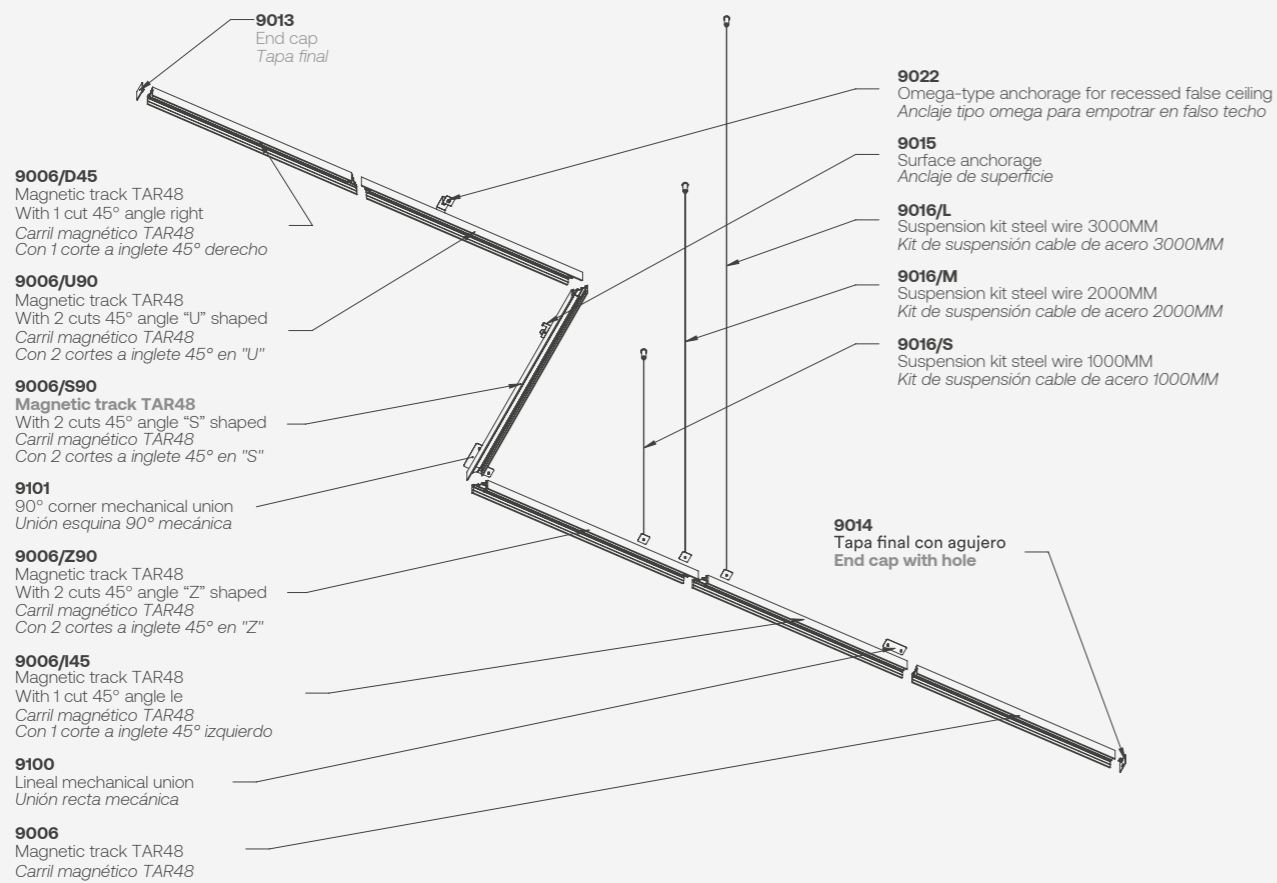


ELECTRIC INSTALLATION - INSTALACIÓN VOLTAJE

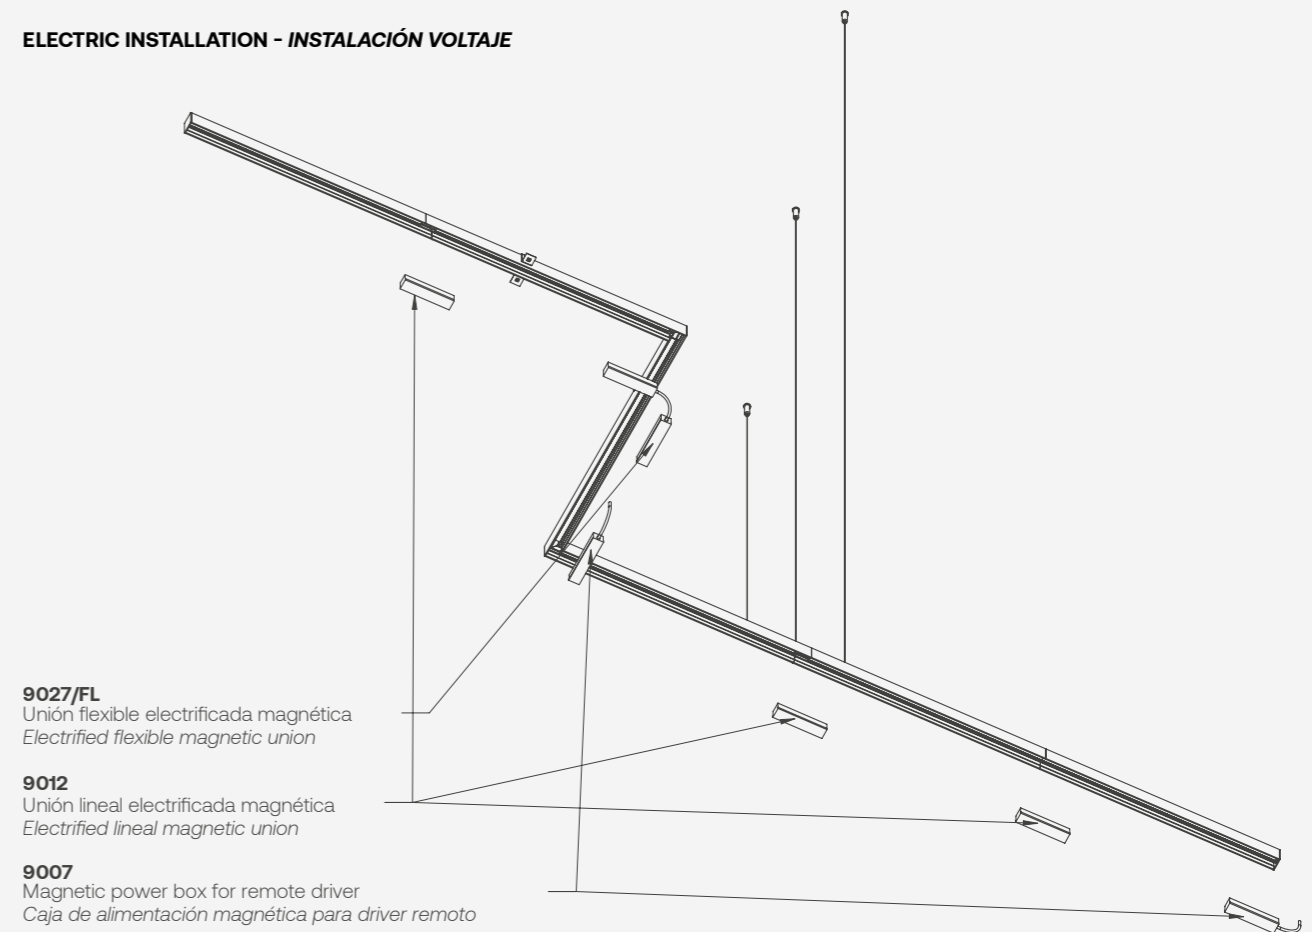

9006
Magnetic track built with aluminum profile.
Carril magnético construido en perfil de aluminio.

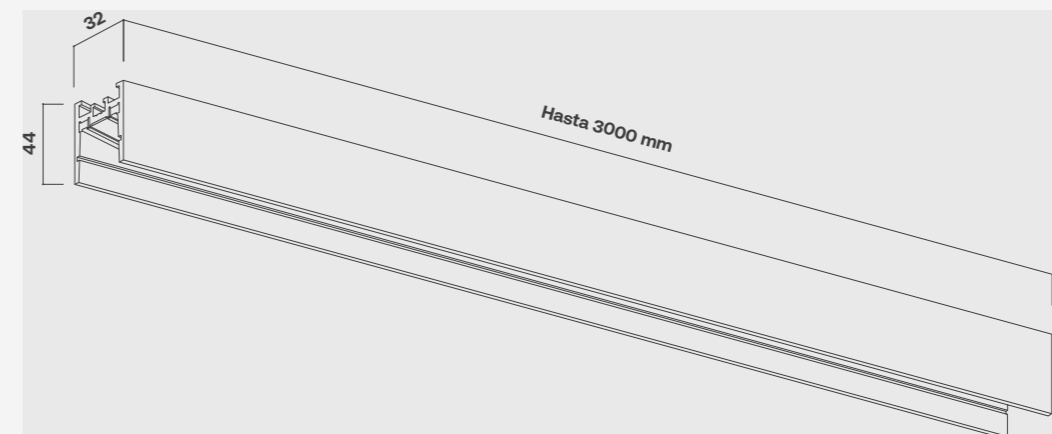



Three-phase Tracklight

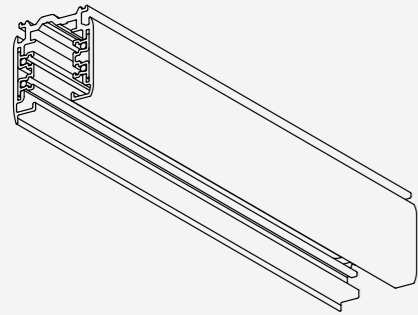

PC020
Three-phase track 1 m
Carril trifásico 1 m

PC021
Three-phase track 2 m
Carril trifásico 2 m



PC022
Three-phase track 3 m
Carril trifásico 3 m

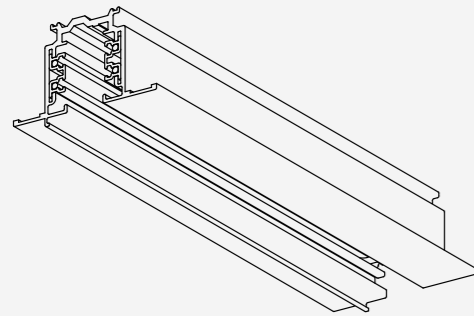


PC023
Recessed three-phase track 1 m
Carril trifásico de empotrar 1 m

PC024
Recessed three-phase track 2 m
Carril trifásico de empotrar 2 m


PC025
Recessed three-phase track 3 m
Carril trifásico de empotrar 3 m




PC030
Right supply
Alimentación derecha



PC031
Left supply
Alimentación izquierda




PC032
Intermediate connection
Unión intermedia




PC033
90° right connection
Unión 90° derecha



PC034
90° left connection
Unión 90° izquierda



PC035
90° adjustable connection
Unión 90° ajustable



PC036
T connection type A
Unión en T tipo A



PC037
T connection type B
Unión en T tipo B




PC038
T connection type C
Unión en T tipo C



PC039
T connection type D
Unión en T tipo D




PC040
X-connection
Unión en X



PC041
End cap
Tapa final




PC042
Ceiling bracket
Soporte a techo



PC043
Suspension kit 1,5m
Kit de suspensión 1,5m


Track with protocol DALI, 1-10V, etc - please consult
Carril con protocolo DALI, 1-10V, etc, a consultar

Pictography



Degrees Axis

The product can rotate up to X degrees for flexible adjustment.
El producto puede girar hasta X grados para un ajuste flexible.



Degrees Tilttable

The light can tilt X degrees to direct illumination where needed.
La luz puede inclinarse X grados para dirigir la iluminación donde se necesite.




Non-insulatable

Luminaires should never be covered with any heat insulating material.
Luminarias no adecuadas para cubrirse con material aislante.



CE

The product complies with European safety and quality standards.
El producto cumple con las normas europeas de seguridad y calidad.




Ceiling Distance

The required distance between the luminaire and the ceiling.
La distancia necesaria entre la luminaria y el techo.



Class I

The product has basic insulation and requires grounding for safety.
El producto tiene aislamiento básico y necesita conexión a tierra para mayor seguridad.



Class II

The product has double insulation and doesn't require grounding.
El producto tiene doble aislamiento y no necesita conexión a tierra.



Clas III

Works with very low voltage and provides extra safety for wet or outdoor areas.
Funciona con muy baja tensión y ofrece seguridad adicional en zonas húmedas o exteriores.



Rectangular Cut Area

The area and shape that needs to be cut for installation.
Alimentación derecha



Circular Cut Area

The diameter size required for the mounting hole.
El tamaño del diámetro necesario para el orificio de montaje.



Indoor

Suitable for indoor use only, IP20-40.
Apto solo para uso en interiores, IP20-40.



IP54

The fixture is protected against limited dust ingress and water splashes from any direction.
La luminaria está protegida contra la entrada limitada de polvo y las salpicaduras de agua desde cualquier dirección.



IP65

The fixture is completely dust-tight and protected against water jets from any direction.
La luminaria es totalmente estanca al polvo y resistente a chorros de agua desde cualquier dirección.



Light Ballas

A built-in or compatible ballast for lighting control.
Un balastro incorporado o compatible para el control de la iluminación.



Light Pendant

The luminaire is designed to be hung from the ceiling.
La luminaria está diseñada para colgarse del techo.



Light Pendant Up-Down

Emits light both upward and downward for balanced illumination.
Emite luz hacia arriba y hacia abajo para una iluminación equilibrada.




Light recessed

Designed to be installed flush with the surface, such as ceilings or walls.
Diseñado para instalarse al ras de la superficie, como techos o paredes.



Light Surface Ceiling

Surface-mounted ceiling lighting.
Luminaria instalada en superficie de techo.



Light Surface Wall

Surface-mounted wall lighting.
Luminaria instalada en superficie de pared.



Light Wall Down

Wall fixture that projects light downward.
Luminaria de pared que proyecta luz hacia abajo.



Light Wall Up-Down

Wall fixture that emits light both upward and downward.
Luminaria de pared que emite luz hacia arriba y hacia abajo.



Magnetic

A magnetic mounting system for easy installation or adjustment.
Sistema de montaje magnético para una instalación o ajuste sencillo.

HER

C/ Arquitecte Moragas, 20-22
08820 El Prat de Llobregat
Barcelona
+34 933 741 663
hello@herlighting.com

