

HER

Products

HER Products

HER

HISTORY

Since our beginning, we have become a reference in the creation of technical and architectural lighting solutions. Years of experience and dedication; quality and innovation; are translated into the confidence of architects, designers, professionals and clients.

LIGHTING WITH INNOVATION AND DESIGN

Her lighting is much more than a lighting manufacturer. Our mission is to create innovative lighting experiences that bring comfort and value to projects. Headquartered in Barcelona, our work reflects the dynamic and constantly evolving nature of today's lighting.

CREATING EXPERIENCES

At Her lighting we believe that lighting is an opportunity to enhance spaces and in this way create environments that inspire, promote well-being and boost productivity, thus improving the daily lives of the people who inhabit and live in them. Our passion for light and our constant search for excellence is reflected in our lighting solutions and projects.

HER LAB

At the heart of our factory is Her Lab, our department dedicated to research and development. A team of enthusiastic and passionate engineers, designers and lighting professionals. Her Lab is constantly developing, exploring and researching new technologies; focused on providing innovative lighting solutions.

SHOWROOM

A unique space dedicated to lighting, designed to inspire and offer our customers the opportunity to experience our luminaires and discover the infinite and unique lighting solutions we provide for their projects.

Av. Josep Tarradellas 51-53
08029 Barcelona

COMMITMENT

Our commitment to light is a fundamental principle that guides us; in the process of creating, designing and manufacturing our luminaires; in our collaboration with professionals, architects and designers; and in the promotion of ethical and responsible consumption. At Her Lighting we strive to create functional and timeless designs that enrich lives and spaces.

HISTORIA

Desde nuestro comienzo, nos hemos convertido en un referente en la creación de soluciones técnicas y arquitectónicas de iluminación. Años de experiencia y dedicación; calidad e innovación; se traducen en confianza de arquitectos, diseñadores, profesionales y clientes.

ILUMINANDO CON INNOVACIÓN Y DISEÑO

Her lighting es mucho más que un fabricante de iluminación. Nuestro objetivo es crear experiencias lumínicas innovadoras, que aporten confort y valor a los proyectos. Ubicados en Barcelona, nuestro hacer refleja la naturaleza dinámica y en constante evolución de la iluminación actual.

CREANDO EXPERIENCIAS

En Her lighting creemos que la iluminación es una oportunidad para enriquecer los espacios y de esta manera crear entornos que inspiren, promuevan el bienestar, impulsen la productividad, mejorando de esta manera el día a día de las personas que lo habitan y lo viven. Nuestra pasión por la luz y nuestra constante búsqueda de la excelencia, se refleja en nuestras soluciones y proyectos de iluminación.

HER LAB

En el corazón de nuestra fábrica se encuentra Her Lab, nuestro departamento dedicado a la investigación y el desarrollo. Un equipo formado por ingenieros, diseñadores y profesionales de la iluminación, entusiastas y apasionados. Her Lab está en constante desarrollo, explorando e investigando nuevas tecnologías; enfocados en brindar soluciones lumínicas innovadoras.

SHOWROOM

Un espacio único dedicado a la iluminación, pensado para inspirar y ofrecer a nuestros clientes la oportunidad de experimentar nuestras luminarias y descubrir las infinitas y singulares soluciones lumínicas que aportamos para sus proyectos.

Av. Josep Tarradellas 51-53
08029 Barcelona

COMPROMISO

Nuestro compromiso con luz es un principio fundamental que nos guía; en el proceso de creación, diseño y fabricación de nuestras luminarias; en nuestra colaboración con profesionales, arquitectos y diseñadores; y en la promoción del consumo ético y responsable. En Her Lighting nos esforzamos por crear diseños funcionales y atemporales que enriquezcan vidas y espacios.

 herlighting.com

 [instagram.com/herlighting](https://www.instagram.com/herlighting)

 [linkedin.com/company/herlighting](https://www.linkedin.com/company/herlighting)

 [youtube.com/@HerLighting](https://www.youtube.com/@HerLighting)

Vip
p. 14

Dip R
p. 22

Dip C
p. 24

Grunt
p. 26

Cylinder
p. 86

Spot Torch Base
p. 88

Nixe 5x1 Surface
p. 90

Comfort
p. 30

Inel L
p. 32

Inel XL
p. 34

Nixe
p. 36

Nixeline Pendant
p. 94

Nixeline Surface
p. 100

Nixeline Trimless
p. 104

Rokta
p. 110

Prisma
p. 44

Puk
p. 46

Slim 50
p. 54

Slim 75
p. 60

Trim 50
p. 66

Panel Light
p. 74

Round
p. 76

Vand
p. 78

Asymmetric In
p. 82

Tare XS Mag
p. 116

Tare XS2 Mag
p. 118

Tare S Mag
p. 120

Tare S2 Mag
p. 122

Pot_65 trk
p. 140

Pot_85 trk
p. 142

Spot Torch Track
p. 144

Hit Zoom
p. 146

Hit Zoom XL
p. 148

Tare M Mag
p. 124

Nixtare 8x1 Mag
p. 126

Code 6x1 300 Mag
p. 128

Dash 600 Mag
p. 130

Lp Mag
p. 132

Round driver 150W
p. 134

Linear driver 100W
p. 136

Gallery Nano Mag
p. 152

Gallery Track
p. 154

Gallery XL Track
p. 156

Gallery Nano In
p. 158

Gallery In
p. 160

Kubbik
p. 162

Rubbik
p. 166

Lit
p. 168

Mila S
p. 174

Estanca
p. 204

Industrial Bay
p. 206

Mila M
p. 178

Snake
p. 182

Tor
p. 184

Wet
p. 194

Slc Spotless IP67
p. 208

Slg High Efficiency
p. 212

Sla Neon IP67
p. 214

Sln Neon IP67
p. 216

Sle Neon IP65
p. 218

Sld IP20
p. 220

Slr RGB IP20
p. 222

Pf005
p. 240

Pf010
p. 241

Pf015
p. 242

Pf020
p. 243

Pf025
p. 244

Slr RGB IP62
p. 224

Slr RGB IP68
p. 226

Slp IP20
p. 228

Slp IP62
p. 230

Slp IP68
p. 232

Pf030
p. 245

Pf040
p. 246

Pf045
p. 247

Pf050
p. 248

Pf055
p. 249

Sls IP20
p. 234

Sls IP62
p. 236

Sls IP68
p. 238

Pf060
p. 250

Pf070
p. 251

Pf400
p. 252

Pf002
p. 253

Pf110
p. 254

Pf220
p. 255

Pf230
p. 256

Vip



Vip S



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- COB CREE
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP54

Basic finishes



Acabados básicos

- Black
- White

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E650.92700415.x	5,1W	15°	90	2700K	350Lm	69Lm/W
E650.92700438.x	5,1W	38°	90	2700K	350Lm	69Lm/W
E650.93000415.x	5,1W	15°	90	3000K	350Lm	69Lm/W
E650.93000438.x	5,1W	38°	90	3000K	350Lm	69Lm/W

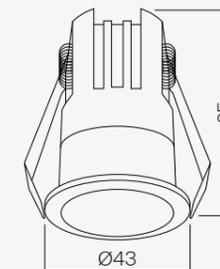

Vip M



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- COB CREE
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP40

Basic finishes



Acabados básicos

- Black
- White

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E651.92701115.x	12,4W	15°	90	2700K	830Lm	67Lm/W
E651.92701138.x	12,4W	38°	90	2700K	830Lm	67Lm/W
E651.93001115.x	12,4W	15°	90	3000K	830Lm	67Lm/W
E651.93001138.x	12,4W	38°	90	3000K	830Lm	67Lm/W

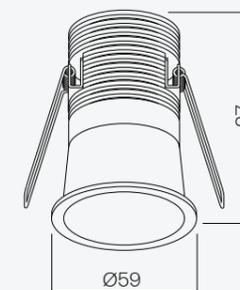

Vip L



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- COB CREE
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP40

Basic finishes


Acabados básicos

- Black
- White



Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E652.92701615.x	18,6W	15°	90	2700K	1250Lm	68Lm/W
E652.92701638.x	18,6W	38°	90	2700K	1250Lm	68Lm/W
E652.93001615.x	18,6W	15°	90	3000K	1250Lm	68Lm/W
E652.93001638.x	18,6W	38°	90	3000K	1250Lm	68Lm/W

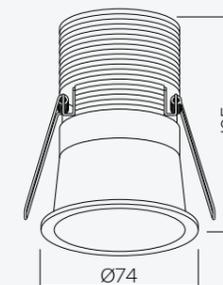

Dip R

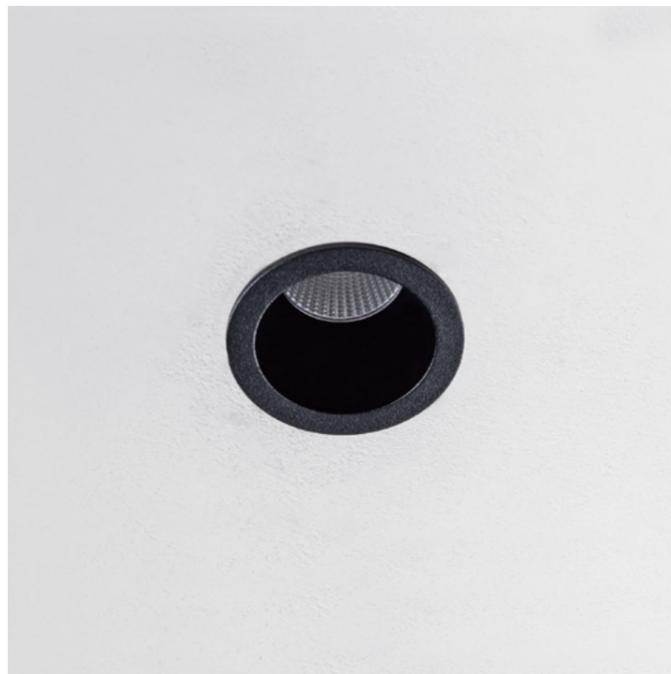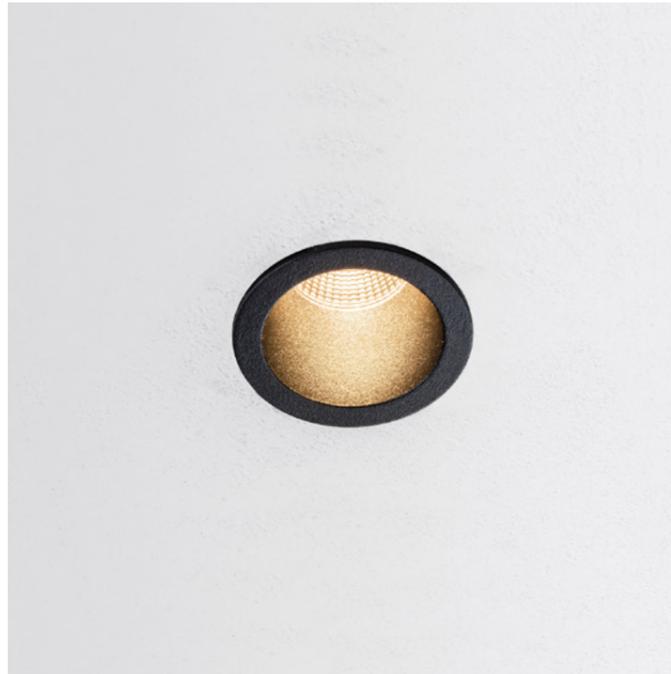

Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP40

Basic finishes



Acabados básicos

- Black
- White


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E501.92700936.x	10,3W	36°	90	2700K	730Lm	71Lm/W
E501.93000936.x	10,3W	36°	90	3000K	730Lm	71Lm/W



Dip C

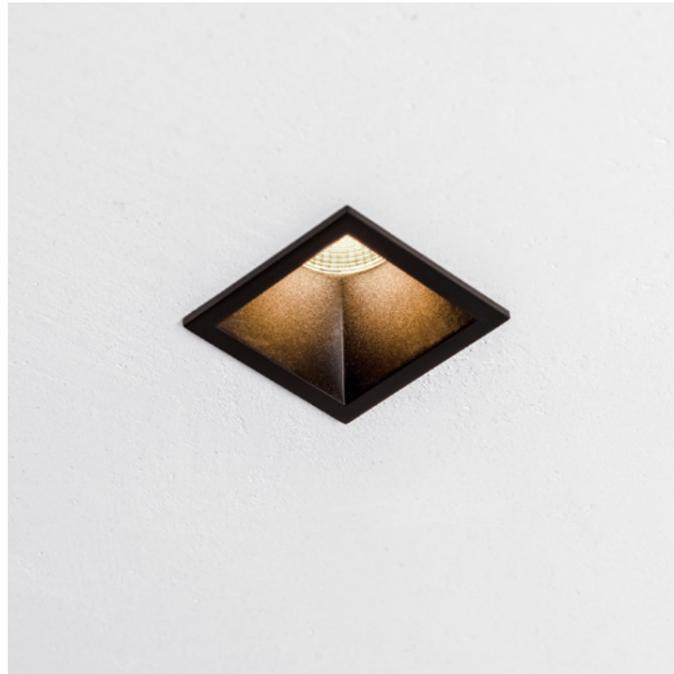

Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP40

Basic finishes



Acabados básicos

- Black
- White


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E503.92700936.x	10,3W	36°	90	2700K	730Lm	71Lm/W
E503.93000936.x	10,3W	36°	90	3000K	730Lm	71Lm/W



Grunt

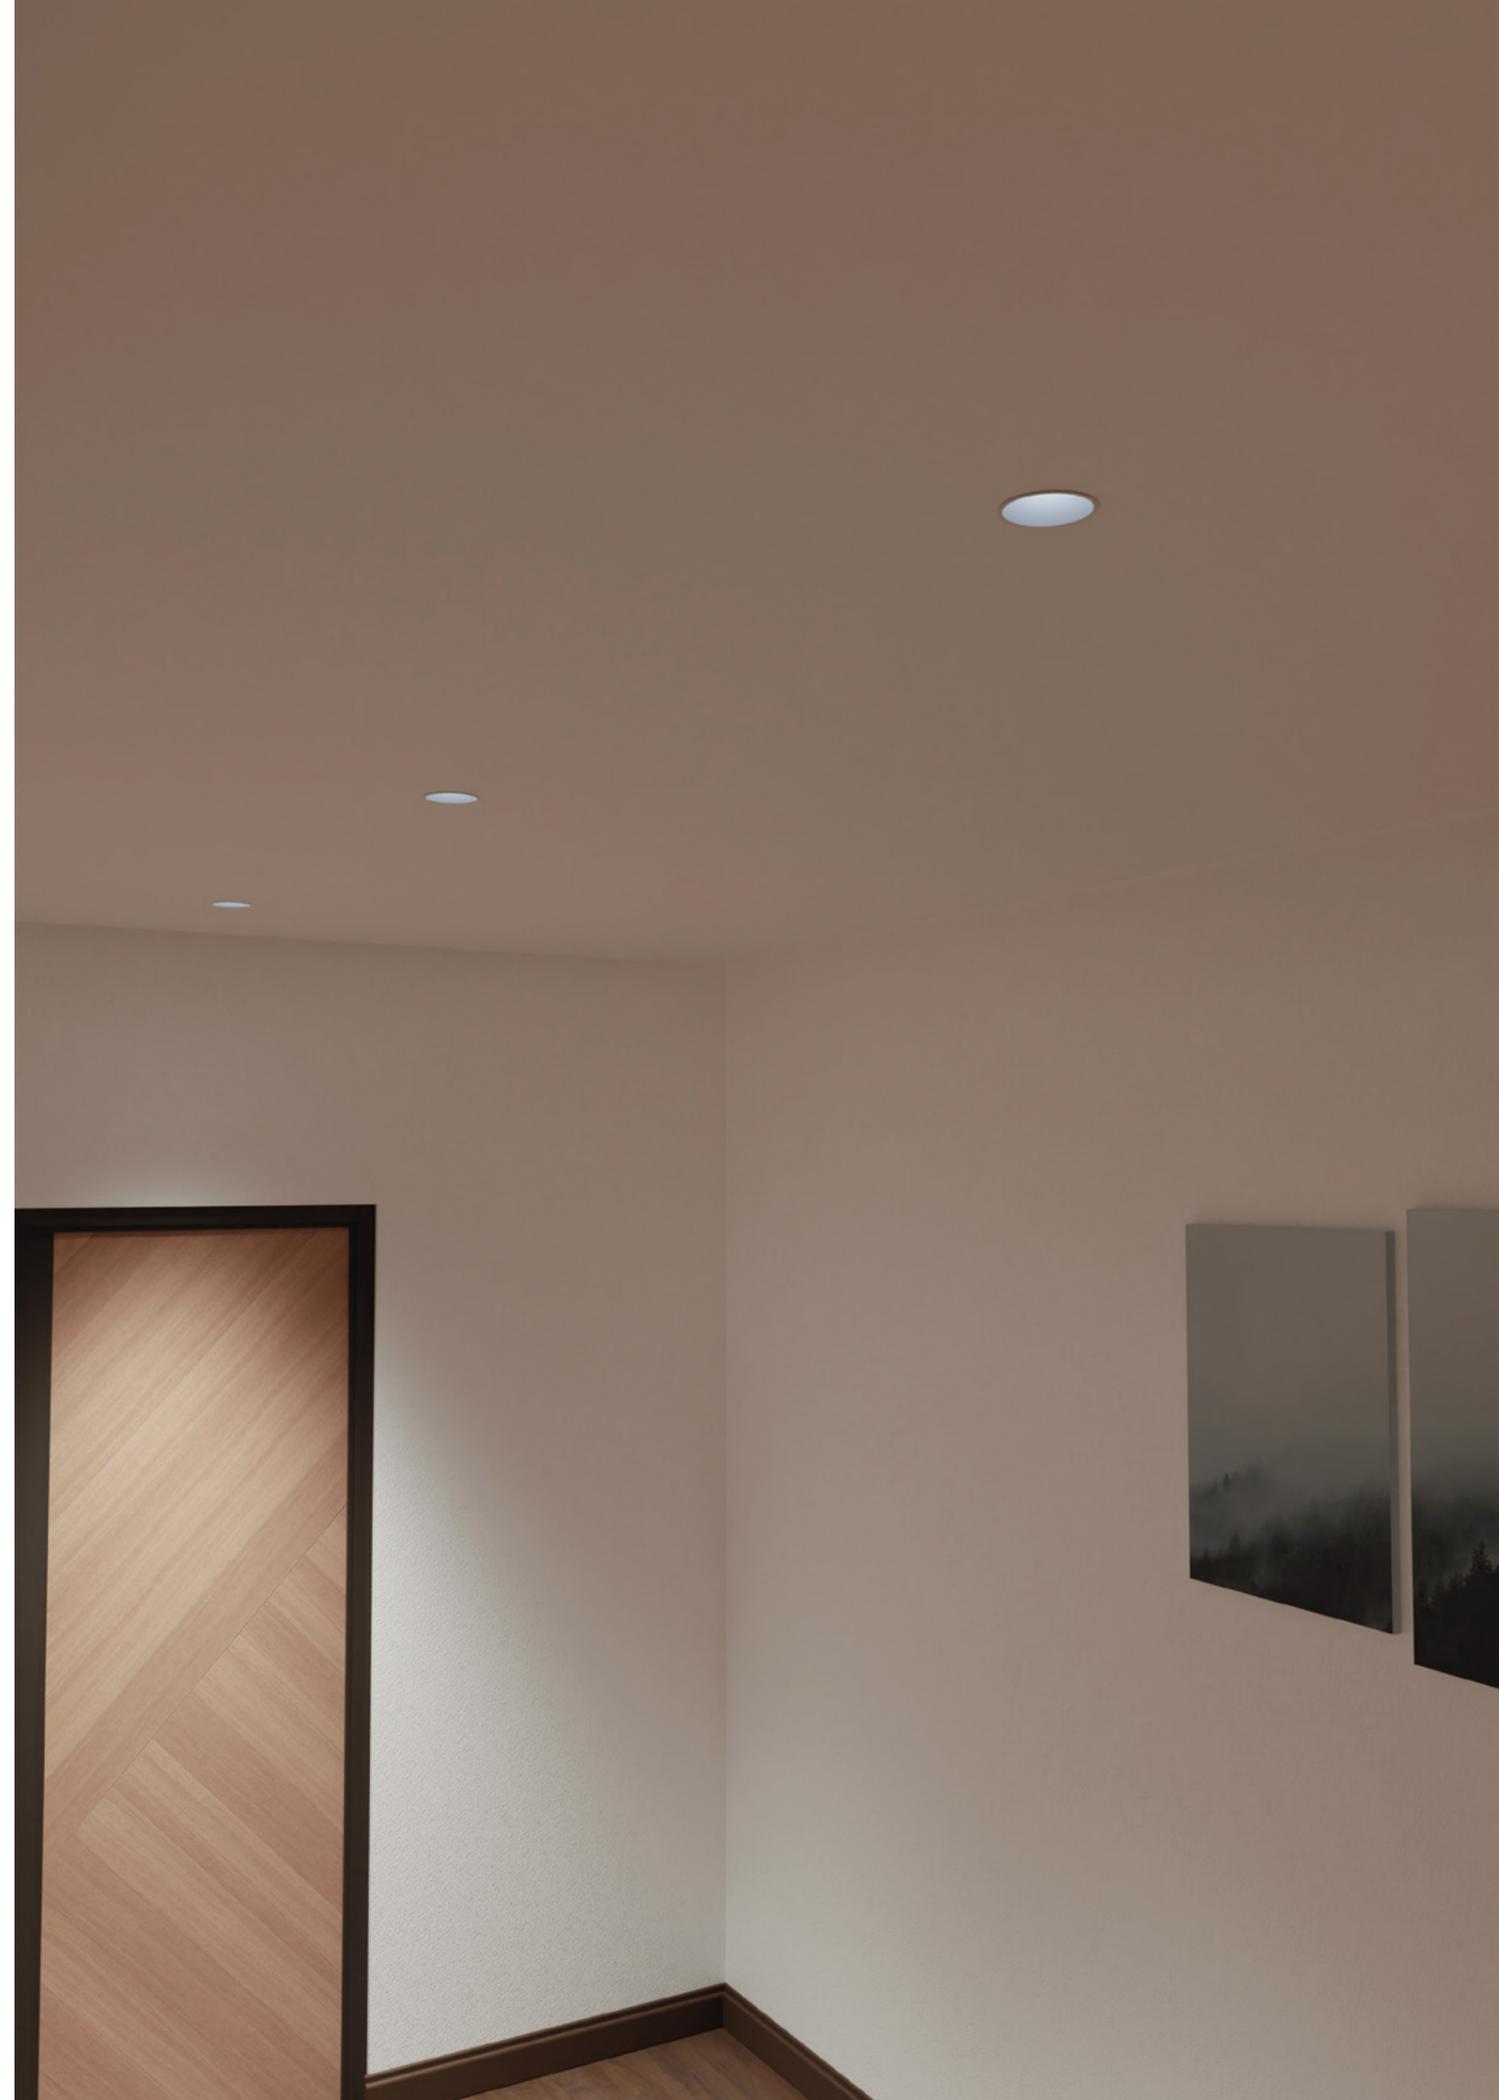

Grunt



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
- White


Accessories Accesorios

- Honeycomb
Panel de abeja
- Transparent glass
Cristal transparente
- Frosted glass
Cristal glaseado

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
L116.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
L116.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
L116.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
L116.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
L116.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
L116.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
L116.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
L116.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
L116.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
L116.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
L116.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
L116.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
L116.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
L116.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
L116.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
L116.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
L116.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
L116.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

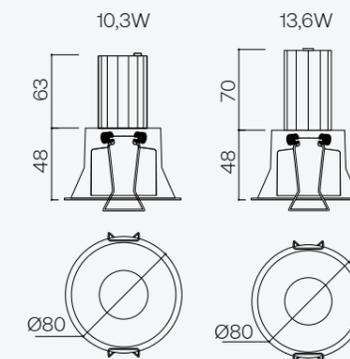

Comfort



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
- White


Accessories Accesorios

- Honeycomb
Panal de abeja
- Transparent glass
Cristal transparente
- Frosted glass
Cristal glaseado

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E011.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
E011.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
E011.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
E011.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
E011.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
E011.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
E011.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
E011.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
E011.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
E011.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
E011.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
E011.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
E011.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
E011.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
E011.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
E011.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
E011.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
E011.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

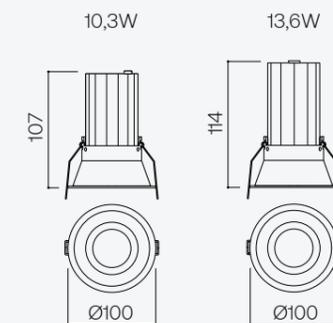

Inel L



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
- White

Accessories Accesorios


- Honeycomb
Panal de abeja
- Transparent glass
Cristal transparente
- Frosted glass
Cristal glaseado

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E006.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
E006.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
E006.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
E006.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
E006.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
E006.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
E006.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
E006.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
E006.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W

E006.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
E006.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
E006.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
E006.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
E006.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
E006.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
E006.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
E006.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
E006.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

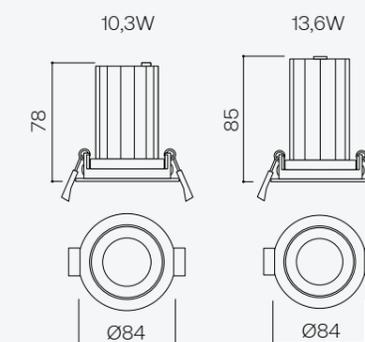

Inel XL



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
- White


Accessories Accesorios

- Honeycomb
Panel de abeja
- Transparent glass
Cristal transparente
- Frosted glass
Cristal glaseado


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E007.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
E007.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
E007.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
E007.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
E007.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
E007.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
E007.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
E007.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
E007.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
E007.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
E007.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
E007.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
E007.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
E007.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
E007.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
E007.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
E007.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
E007.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

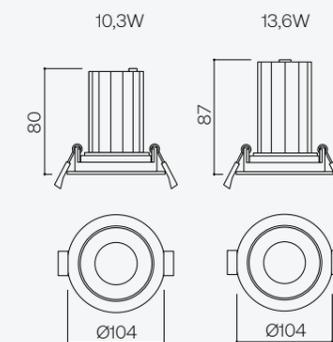

Nixe

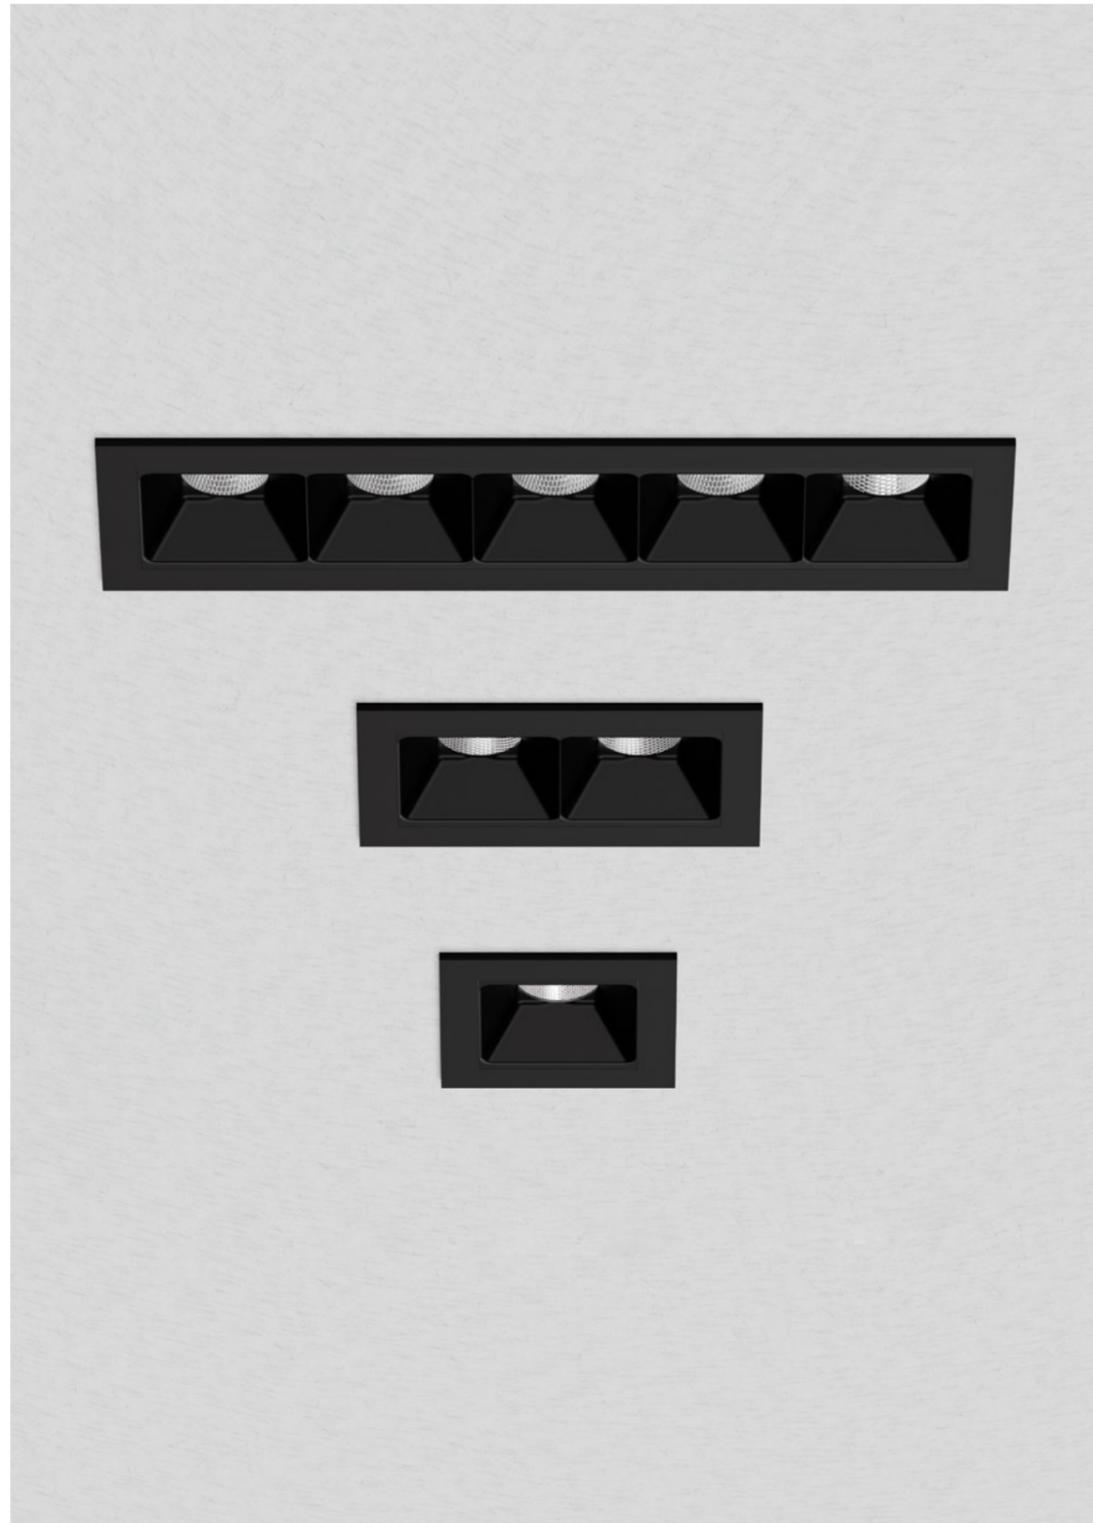

Nixe 1x1



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- MP LED OSRAM
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20



Finishes Acabados

- Black
- White

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E210.92700215.x	2,1W	15°	90	2700K	175Lm	84Lm/W
E210.92700245.x	2,1W	45°	90	2700K	175Lm	84Lm/W
E210.93000215.x	2,1W	15°	90	3000K	175Lm	84Lm/W
E210.93000245.x	2,1W	45°	90	3000K	175Lm	84Lm/W

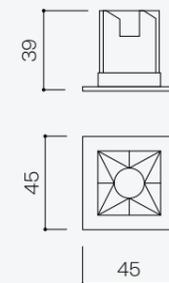

Nixe 2x1



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- MP LED OSRAM
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20


Finishes Acabados

- Black
- White

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E220.92700415.x	4,4W	15°	90	2700K	350Lm	80Lm/W
E220.92700445.x	4,4W	45°	90	2700K	350Lm	80Lm/W
E220.93000415.x	4,4W	15°	90	3000K	350Lm	80Lm/W
E220.93000445.x	4,4W	45°	90	3000K	350Lm	80Lm/W

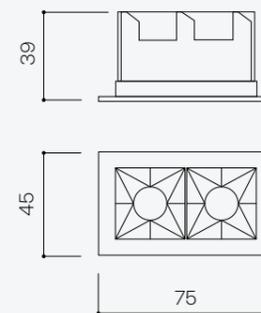

Nixe 5x1



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- MP LED OSRAM
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20


Finishes Acabados

- Black
- White


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E250.92700915.x	11,1W	15°	90	2700K	875Lm	79Lm/W
E250.92700945.x	11,1W	45°	90	2700K	875Lm	79Lm/W
E250.93000915.x	11,1W	15°	90	3000K	875Lm	79Lm/W
E250.93000945.x	11,1W	45°	90	3000K	875Lm	79Lm/W

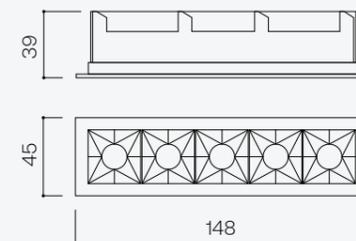

Prisma



Luminary

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación (28,1W)

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Dimming Regulación (36,2W)

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Dimming Regulación (48,3W)

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
- White


Accessories Accesorios

- Sculpture filter 25°-37°
Filtro escultura 25°-37°
- Sculpture filter 21°-30°
Filtro escultura 21°-30°
- Honeycomb
Panal de abeja
- Transparent glass
Cristal transparente
- Frosted glass
Cristal glaseado


Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E030.92702417.x	28,1W	17°	90	2700K	2329Lm	83Lm/W
E030.92702424.x	28,1W	24°	90	2700K	2329Lm	83Lm/W
E030.92702440.x	28,1W	40°	90	2700K	2329Lm	83Lm/W
E030.92702460.x	28,1W	60°	90	2700K	2329Lm	83Lm/W
E030.93002417.x	28,1W	17°	90	3000K	2511Lm	90Lm/W
E030.93002424.x	28,1W	24°	90	3000K	2511Lm	90Lm/W
E030.93002440.x	28,1W	40°	90	3000K	2511Lm	90Lm/W
E030.93002460.x	28,1W	60°	90	3000K	2511Lm	90Lm/W
E030.94002417.x	28,1W	17°	90	4000K	2703Lm	97Lm/W
E030.94002424.x	28,1W	24°	90	4000K	2703Lm	97Lm/W
E030.94002440.x	28,1W	40°	90	4000K	2703Lm	97Lm/W
E030.94002460.x	28,1W	60°	90	4000K	2703Lm	97Lm/W
E030.92703117.x	36,2W	17°	90	2700K	2914Lm	81Lm/W
E030.92703124.x	36,2W	24°	90	2700K	2914Lm	81Lm/W
E030.92703140.x	36,2W	40°	90	2700K	2914Lm	81Lm/W
E030.92703160.x	36,2W	60°	90	2700K	2914Lm	81Lm/W
E030.93003117.x	36,2W	17°	90	3000K	3142Lm	87Lm/W
E030.93003124.x	36,2W	24°	90	3000K	3142Lm	87Lm/W
E030.93003140.x	36,2W	40°	90	3000K	3142Lm	87Lm/W
E030.93003160.x	36,2W	60°	90	3000K	3142Lm	87Lm/W
E030.94003117.x	36,2W	17°	90	4000K	3381Lm	94Lm/W
E030.94003124.x	36,2W	24°	90	4000K	3381Lm	94Lm/W
E030.94003140.x	36,2W	40°	90	4000K	3381Lm	94Lm/W
E030.94003160.x	36,2W	60°	90	4000K	3381Lm	94Lm/W
E030.92704215.x	48,3W	15°	90	2700K	3906Lm	81Lm/W
E030.92704224.x	48,3W	24°	90	2700K	3906Lm	81Lm/W
E030.92704240.x	48,3W	40°	90	2700K	3906Lm	81Lm/W
E030.92704255.x	48,3W	55°	90	2700K	3906Lm	81Lm/W
E030.93004215.x	48,3W	15°	90	3000K	4240Lm	88Lm/W
E030.93004224.x	48,3W	24°	90	3000K	4240Lm	88Lm/W
E030.93004240.x	48,3W	40°	90	3000K	4240Lm	88Lm/W
E030.93004255.x	48,3W	55°	90	3000K	4240Lm	88Lm/W
E030.94004215.x	48,3W	15°	90	4000K	4560Lm	95Lm/W
E030.94004224.x	48,3W	24°	90	4000K	4560Lm	95Lm/W
E030.94004240.x	48,3W	40°	90	4000K	4560Lm	95Lm/W
E030.94004255.x	48,3W	55°	90	4000K	4560Lm	95Lm/W

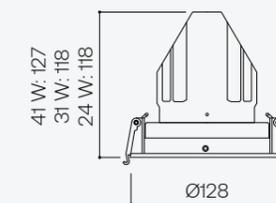

Puk

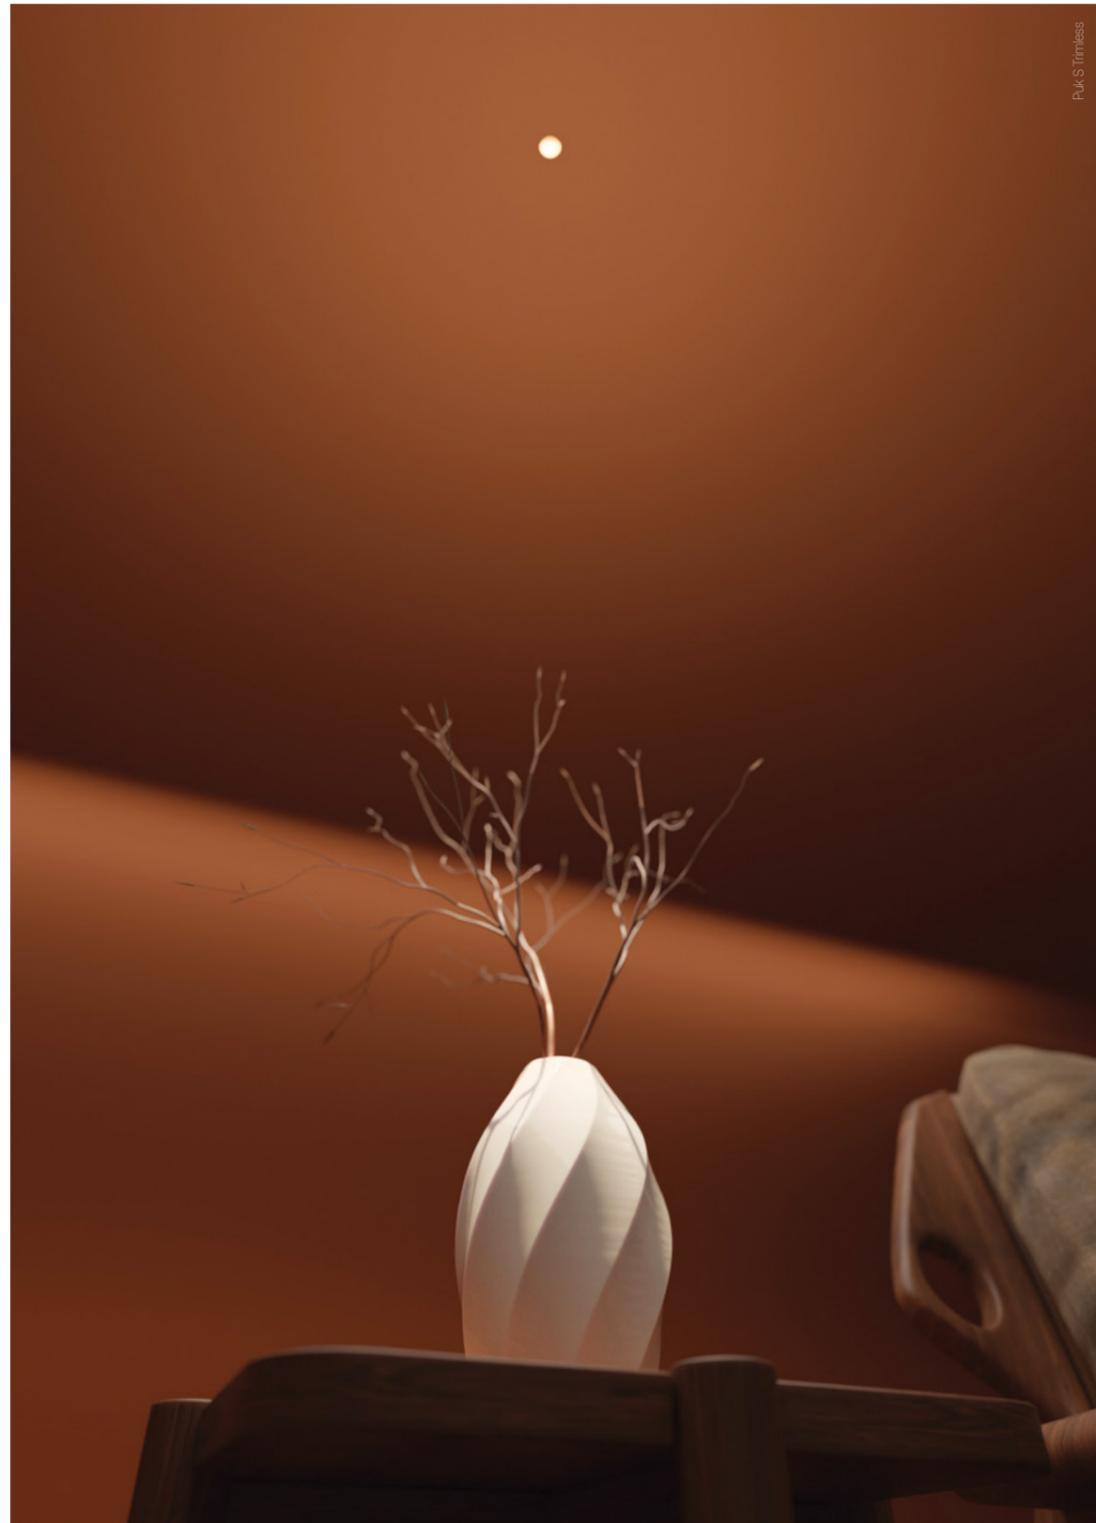

Puk S Trimless

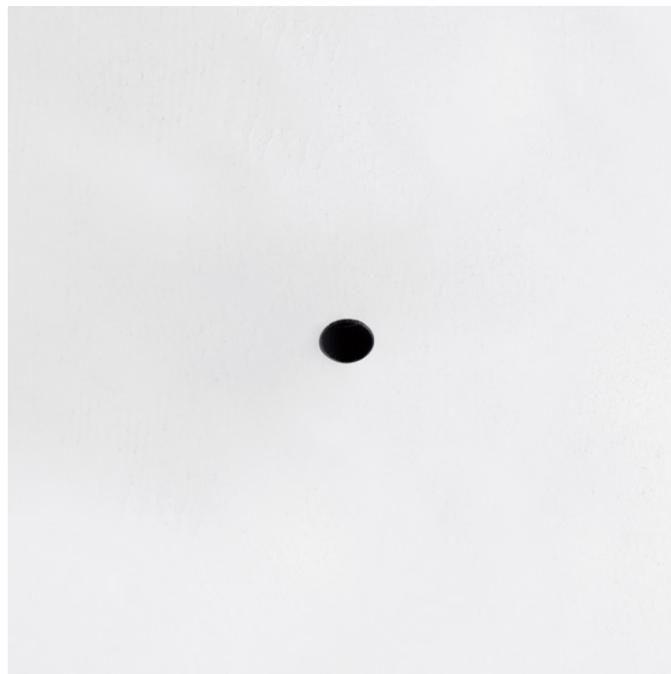

Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- HP LED CREE
- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20



Finishes Acabados

- Black

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E604.92700615.x	6,9W	15°	90	2700K	320Lm	47Lm/W
E604.93000615.x	6,9W	15°	90	3000K	320Lm	47Lm/W



Puk M Trimless



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 2
 - UGR <19

Optic Óptica

- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP43

Finishes Acabados

- Black
- White


Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E605.927007HB.x	7,8W	HC24°	90	2700K	680Lm	88Lm/W
E605.927007HC.x	7,8W	HC36°	90	2700K	680Lm	88Lm/W
E605.930007HB.x	7,8W	HC24°	90	3000K	680Lm	88Lm/W
E605.930007HC.x	7,8W	HC36°	90	3000K	680Lm	88Lm/W

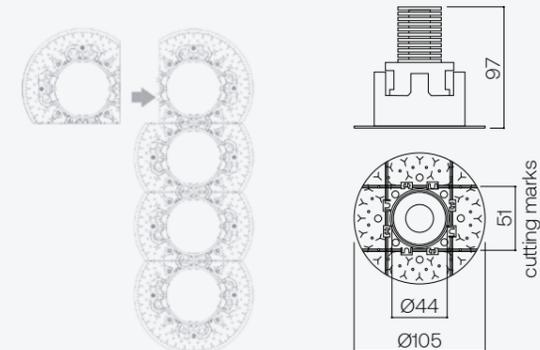

Puk L Trimless



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 2
 - UGR <19

Optic Óptica

- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP43

Finishes Acabados

- Black
- White


Accessories Accesorios

- Honeycomb (included)
Panal de abeja (incluido)


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E606.927012H4.x	13,6W	HC40°	90	2700K	1300Lm	96Lm/W
E606.930012H4.x	13,6W	HC40°	90	3000K	1300Lm	96Lm/W

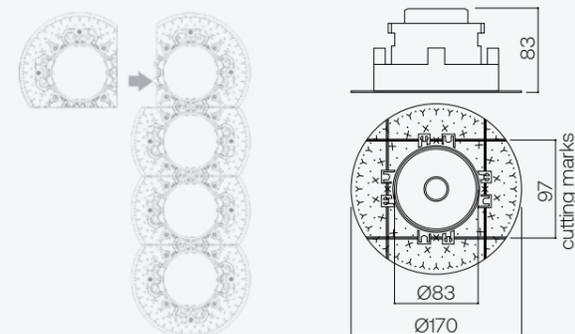

Slim 50 1x1



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
- White


Accessories Accesorios

- Honeycomb
Panal de abeja
- Transparent glass
Cristal transparente
- Frosted glass
Cristal glaseado

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E231.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
E231.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
E231.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
E231.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
E231.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
E231.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
E231.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
E231.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
E231.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
E231.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
E231.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
E231.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
E231.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
E231.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
E231.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
E231.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
E231.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
E231.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

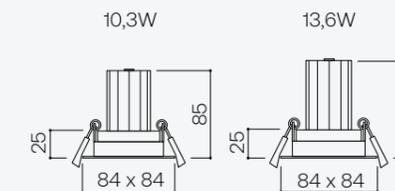

Slim 50 2x1



Luminary

- Luminária
- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
- White

Accessories Accesorios



- Honeycomb
Panal de abeja
- Transparent glass
Cristal transparente
- Frosted glass
Cristal glaseado

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E232.92701820.x	2x10,3W	20°	90	2700K	2x683Lm	67Lm/W
E232.92701840.x	2x10,3W	40°	90	2700K	2x683Lm	67Lm/W
E232.92701860.x	2x10,3W	60°	90	2700K	2x683Lm	67Lm/W
E232.93001820.x	2x10,3W	20°	90	3000K	2x779Lm	76Lm/W
E232.93001840.x	2x10,3W	40°	90	3000K	2x779Lm	76Lm/W
E232.93001860.x	2x10,3W	60°	90	3000K	2x779Lm	76Lm/W
E232.94001820.x	2x10,3W	20°	90	4000K	2x870Lm	85Lm/W
E232.94001840.x	2x10,3W	40°	90	4000K	2x870Lm	85Lm/W
E232.94001860.x	2x10,3W	60°	90	4000K	2x870Lm	85Lm/W

E232.92702425.x	2x13,6W	25°	90	2700K	2x1080Lm	80Lm/W
E232.92702443.x	2x13,6W	43°	90	2700K	2x1080Lm	80Lm/W
E232.92702460.x	2x13,6W	60°	90	2700K	2x1080Lm	80Lm/W
E232.93002425.x	2x13,6W	25°	90	3000K	2x1217Lm	90Lm/W
E232.93002443.x	2x13,6W	43°	90	3000K	2x1217Lm	90Lm/W
E232.93002460.x	2x13,6W	60°	90	3000K	2x1217Lm	90Lm/W
E232.94002425.x	2x13,6W	25°	90	4000K	2x1318Lm	97Lm/W
E232.94002443.x	2x13,6W	43°	90	4000K	2x1318Lm	97Lm/W
E232.94002460.x	2x13,6W	60°	90	4000K	2x1318Lm	97Lm/W

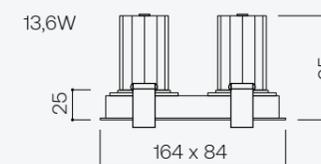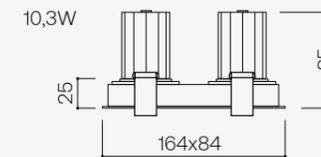

Slim 50 3x1



Luminary

- Luminária**
 • L70 > 50000h
 • MacAdam 3

LED/Optic Óptica

- COB LUMINUS
 • Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
 • PH-CUT
 • 1-10V
 • PUSH ONLY
 • DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
 ● White

Accessories Accesorios



- Honeycomb
Panal de abeja
 • Transparent glass
Cristal transparente
 • Frosted glass
Cristal glaseado

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E233.92702720.x	3x10,3W	20°	90	2700K	3x683Lm	67Lm/W
E233.92702740.x	3x10,3W	40°	90	2700K	3x683Lm	67Lm/W
E233.92702760.x	3x10,3W	60°	90	2700K	3x683Lm	67Lm/W
E233.93002720.x	3x10,3W	20°	90	3000K	3x779Lm	76Lm/W
E233.93002740.x	3x10,3W	40°	90	3000K	3x779Lm	76Lm/W
E233.93002760.x	3x10,3W	60°	90	3000K	3x779Lm	76Lm/W
E233.94002720.x	3x10,3W	20°	90	4000K	3x870Lm	85Lm/W
E233.94002740.x	3x10,3W	40°	90	4000K	3x870Lm	85Lm/W
E233.94002760.x	3x10,3W	60°	90	4000K	3x870Lm	85Lm/W

E233.92703625.x	3x13,6W	25°	90	2700K	3x1080Lm	80Lm/W
E233.92703643.x	3x13,6W	43°	90	2700K	3x1080Lm	80Lm/W
E233.92703660.x	3x13,6W	60°	90	2700K	3x1080Lm	80Lm/W
E233.93003625.x	3x13,6W	25°	90	3000K	3x1217Lm	90Lm/W
E233.93003643.x	3x13,6W	43°	90	3000K	3x1217Lm	90Lm/W
E233.93003660.x	3x13,6W	60°	90	3000K	3x1217Lm	90Lm/W
E233.94003625.x	3x13,6W	25°	90	4000K	3x1318Lm	97Lm/W
E233.94003643.x	3x13,6W	43°	90	4000K	3x1318Lm	97Lm/W
E233.94003660.x	3x13,6W	60°	90	4000K	3x1318Lm	97Lm/W

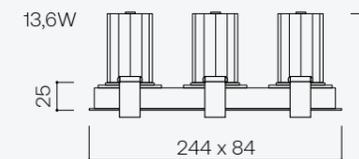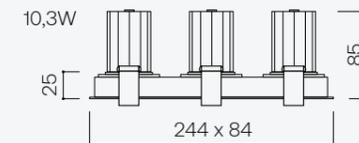

Slim 75 1x1



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación (28,1W)

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Dimming Regulación (36,2W)

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Dimming Regulación (48,3W)

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
- White


Accessories Accesorios

- Sculpture filter 25°-37°
Filtro escultura 25°-37°
- Sculpture filter 21°-30°
Filtro escultura 21°-30°
- Honeycomb
Panal de abeja
- Transparent glass
Cristal transparente
- Frosted glass
Cristal glaseado


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E054.92702417.x	28,1W	17°	90	2700K	2329Lm	83Lm/W
E054.92702424.x	28,1W	24°	90	2700K	2329Lm	83Lm/W
E054.92702440.x	28,1W	40°	90	2700K	2329Lm	83Lm/W
E054.92702460.x	28,1W	60°	90	2700K	2329Lm	83Lm/W
E054.93002417.x	28,1W	17°	90	3000K	2511Lm	90Lm/W
E054.93002424.x	28,1W	24°	90	3000K	2511Lm	90Lm/W
E054.93002440.x	28,1W	40°	90	3000K	2511Lm	90Lm/W
E054.93002460.x	28,1W	60°	90	3000K	2511Lm	90Lm/W
E054.94002417.x	28,1W	17°	90	4000K	2703Lm	97Lm/W
E054.94002424.x	28,1W	24°	90	4000K	2703Lm	97Lm/W
E054.94002440.x	28,1W	40°	90	4000K	2703Lm	97Lm/W
E054.94002460.x	28,1W	60°	90	4000K	2703Lm	97Lm/W
E054.92703117.x	36,2W	17°	90	2700K	2914Lm	81Lm/W
E054.92703124.x	36,2W	24°	90	2700K	2914Lm	81Lm/W
E054.92703140.x	36,2W	40°	90	2700K	2914Lm	81Lm/W
E054.92703160.x	36,2W	60°	90	2700K	2914Lm	81Lm/W
E054.93003117.x	36,2W	17°	90	3000K	3142Lm	87Lm/W
E054.93003124.x	36,2W	24°	90	3000K	3142Lm	87Lm/W
E054.93003140.x	36,2W	40°	90	3000K	3142Lm	87Lm/W
E054.93003160.x	36,2W	60°	90	3000K	3142Lm	87Lm/W
E054.94003117.x	36,2W	17°	90	4000K	3381Lm	94Lm/W
E054.94003124.x	36,2W	24°	90	4000K	3381Lm	94Lm/W
E054.94003140.x	36,2W	40°	90	4000K	3381Lm	94Lm/W
E054.94003160.x	36,2W	60°	90	4000K	3381Lm	94Lm/W
E054.92704215.x	48,3W	15°	90	2700K	3906Lm	81Lm/W
E054.92704224.x	48,3W	24°	90	2700K	3906Lm	81Lm/W
E054.92704240.x	48,3W	40°	90	2700K	3906Lm	81Lm/W
E054.92704255.x	48,3W	55°	90	2700K	3906Lm	81Lm/W
E054.93004215.x	48,3W	15°	90	3000K	4240Lm	88Lm/W
E054.93004224.x	48,3W	24°	90	3000K	4240Lm	88Lm/W
E054.93004240.x	48,3W	40°	90	3000K	4240Lm	88Lm/W
E054.93004255.x	48,3W	55°	90	3000K	4240Lm	88Lm/W
E054.94004215.x	48,3W	15°	90	4000K	4560Lm	95Lm/W
E054.94004224.x	48,3W	24°	90	4000K	4560Lm	95Lm/W
E054.94004240.x	48,3W	40°	90	4000K	4560Lm	95Lm/W
E054.94004255.x	48,3W	55°	90	4000K	4560Lm	95Lm/W

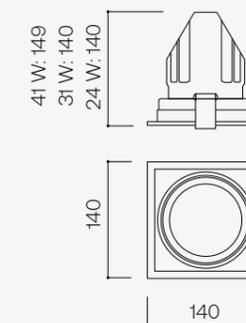

Slim 75 2x1



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación (2x28,1W)

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Dimming Regulación (2x36,2W)

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Dimming Regulación (2x48,3W)

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
- White

Accessories Accesorios

- Sculpture filter 25°-37°
Filtro escultura 25°-37°
- Sculpture filter 21°-30°
Filtro escultura 21°-30°
- Honeycomb
Panal de abeja
- Transparent glass
Cristal transparente
- Frosted glass
Cristal glaseado


Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E052.92704817.x	2x28,1W	17°	90	2700K	2x2329Lm	83Lm/W
E052.92704824.x	2x28,1W	24°	90	2700K	2x2329Lm	83Lm/W
E052.92704840.x	2x28,1W	40°	90	2700K	2x2329Lm	83Lm/W
E052.92704860.x	2x28,1W	60°	90	2700K	2x2329Lm	83Lm/W
E052.93004817.x	2x28,1W	17°	90	3000K	2x2511Lm	90Lm/W
E052.93004824.x	2x28,1W	24°	90	3000K	2x2511Lm	90Lm/W
E052.93004840.x	2x28,1W	40°	90	3000K	2x2511Lm	90Lm/W
E052.93004860.x	2x28,1W	60°	90	3000K	2x2511Lm	90Lm/W
E052.94004817.x	2x28,1W	17°	90	4000K	2x2703Lm	97Lm/W
E052.94004824.x	2x28,1W	24°	90	4000K	2x2703Lm	97Lm/W
E052.94004840.x	2x28,1W	40°	90	4000K	2x2703Lm	97Lm/W
E052.94004860.x	2x28,1W	60°	90	4000K	2x2703Lm	97Lm/W

E052.92706217.x	2x36,2W	17°	90	2700K	2x2914Lm	81Lm/W
E052.92706224.x	2x36,2W	24°	90	2700K	2x2914Lm	81Lm/W
E052.92706240.x	2x36,2W	40°	90	2700K	2x2914Lm	81Lm/W
E052.92706260.x	2x36,2W	60°	90	2700K	2x2914Lm	81Lm/W
E052.93006217.x	2x36,2W	17°	90	3000K	2x3142Lm	87Lm/W
E052.93006224.x	2x36,2W	24°	90	3000K	2x3142Lm	87Lm/W
E052.93006240.x	2x36,2W	40°	90	3000K	2x3142Lm	87Lm/W
E052.93006260.x	2x36,2W	60°	90	3000K	2x3142Lm	87Lm/W
E052.94006217.x	2x36,2W	17°	90	4000K	2x3381Lm	94Lm/W
E052.94006224.x	2x36,2W	24°	90	4000K	2x3381Lm	94Lm/W
E052.94006240.x	2x36,2W	40°	90	4000K	2x3381Lm	94Lm/W
E052.94006260.x	2x36,2W	60°	90	4000K	2x3381Lm	94Lm/W

E052.92708415.x	2x48,3W	15°	90	2700K	2x3906Lm	81Lm/W
E052.92708424.x	2x48,3W	24°	90	2700K	2x3906Lm	81Lm/W
E052.92708440.x	2x48,3W	40°	90	2700K	2x3906Lm	81Lm/W
E052.92708455.x	2x48,3W	55°	90	2700K	2x3906Lm	81Lm/W
E052.93008415.x	2x48,3W	15°	90	3000K	2x4240Lm	88Lm/W
E052.93008424.x	2x48,3W	24°	90	3000K	2x4240Lm	88Lm/W
E052.93008440.x	2x48,3W	40°	90	3000K	2x4240Lm	88Lm/W
E052.93008455.x	2x48,3W	55°	90	3000K	2x4240Lm	88Lm/W
E052.94008415.x	2x48,3W	15°	90	4000K	2x4560Lm	95Lm/W
E052.94008424.x	2x48,3W	24°	90	4000K	2x4560Lm	95Lm/W
E052.94008440.x	2x48,3W	40°	90	4000K	2x4560Lm	95Lm/W
E052.94008455.x	2x48,3W	55°	90	4000K	2x4560Lm	95Lm/W

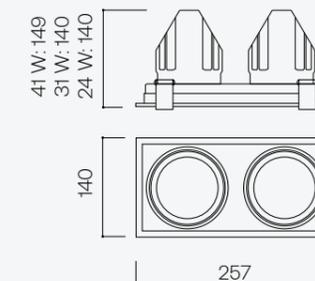

Slim 75 3x1



Luminary

- Luminária
- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación (3x28,1W)

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Dimming Regulación (3x36,2W)

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Dimming Regulación (3x48,3W)

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
- White


Accessories Accesorios

- Sculpture filter 25°-37°
Filtro escultura 25°-37°
- Sculpture filter 21°-30°
Filtro escultura 21°-30°
- Honeycomb
Panal de abeja
- Transparent glass
Cristal transparente
- Frosted glass
Cristal glaseado

Downloads Descargas





Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E055.92707217.x	3x28,1W	17°	90	2700K	3x2329Lm	83Lm/W
E055.92707224.x	3x28,1W	24°	90	2700K	3x2329Lm	83Lm/W
E055.92707240.x	3x28,1W	40°	90	2700K	3x2329Lm	83Lm/W
E055.92707260.x	3x28,1W	60°	90	2700K	3x2329Lm	83Lm/W
E055.93007217.x	3x28,1W	17°	90	3000K	3x2511Lm	90Lm/W
E055.93007224.x	3x28,1W	24°	90	3000K	3x2511Lm	90Lm/W
E055.93007240.x	3x28,1W	40°	90	3000K	3x2511Lm	90Lm/W
E055.93007260.x	3x28,1W	60°	90	3000K	3x2511Lm	90Lm/W
E055.94007217.x	3x28,1W	17°	90	4000K	3x2703Lm	97Lm/W
E055.94007224.x	3x28,1W	24°	90	4000K	3x2703Lm	97Lm/W
E055.94007240.x	3x28,1W	40°	90	4000K	3x2703Lm	97Lm/W
E055.94007260.x	3x28,1W	60°	90	4000K	3x2703Lm	97Lm/W
E055.92709317.x	3x36,2W	17°	90	2700K	3x2914Lm	81Lm/W
E055.92709324.x	3x36,2W	24°	90	2700K	3x2914Lm	81Lm/W
E055.92709340.x	3x36,2W	40°	90	2700K	3x2914Lm	81Lm/W
E055.92709360.x	3x36,2W	60°	90	2700K	3x2914Lm	81Lm/W
E055.93009317.x	3x36,2W	17°	90	3000K	3x3142Lm	87Lm/W
E055.93009324.x	3x36,2W	24°	90	3000K	3x3142Lm	87Lm/W
E055.93009340.x	3x36,2W	40°	90	3000K	3x3142Lm	87Lm/W
E055.93009360.x	3x36,2W	60°	90	3000K	3x3142Lm	87Lm/W
E055.94009317.x	3x36,2W	17°	90	4000K	3x3381Lm	94Lm/W
E055.94009324.x	3x36,2W	24°	90	4000K	3x3381Lm	94Lm/W
E055.94009340.x	3x36,2W	40°	90	4000K	3x3381Lm	94Lm/W
E055.94009360.x	3x36,2W	60°	90	4000K	3x3381Lm	94Lm/W
E055.92712615.x	3x48,3W	15°	90	2700K	3x3906Lm	81Lm/W
E055.92712624.x	3x48,3W	24°	90	2700K	3x3906Lm	81Lm/W
E055.92712640.x	3x48,3W	40°	90	2700K	3x3906Lm	81Lm/W
E055.92712655.x	3x48,3W	55°	90	2700K	3x3906Lm	81Lm/W
E055.93012615.x	3x48,3W	15°	90	3000K	3x4240Lm	88Lm/W
E055.93012624.x	3x48,3W	24°	90	3000K	3x4240Lm	88Lm/W
E055.93012640.x	3x48,3W	40°	90	3000K	3x4240Lm	88Lm/W
E055.93012655.x	3x48,3W	55°	90	3000K	3x4240Lm	88Lm/W
E055.94012615.x	3x48,3W	15°	90	4000K	3x4560Lm	95Lm/W
E055.94012624.x	3x48,3W	24°	90	4000K	3x4560Lm	95Lm/W
E055.94012640.x	3x48,3W	40°	90	4000K	3x4560Lm	95Lm/W
E055.94012655.x	3x48,3W	55°	90	4000K	3x4560Lm	95Lm/W

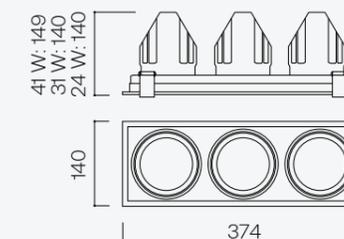

Trim 50



Trim 50 1x1

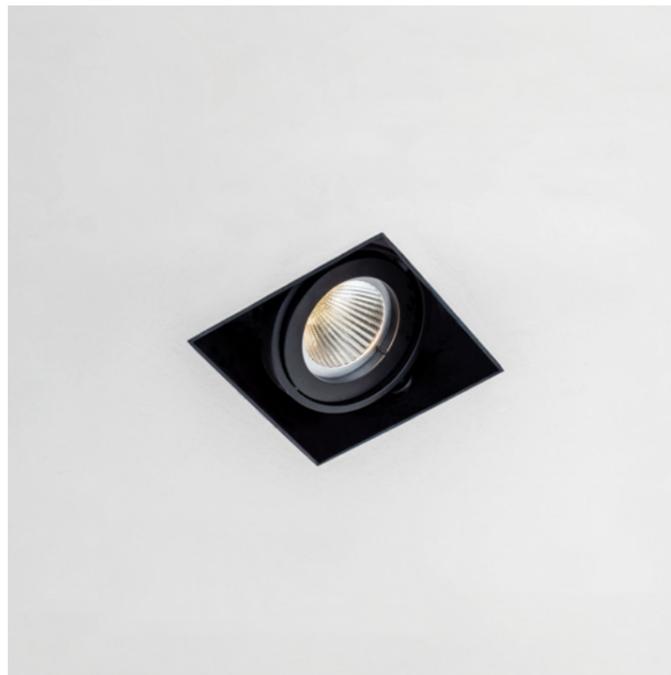

Luminary

- Luminária
- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
- White


Accessories Accesorios

- Honeycomb
Panel de abeja
- Transparent glass
Cristal transparente
- Frosted glass
Cristal glaseado


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E110.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
E110.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
E110.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
E110.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
E110.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
E110.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
E110.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
E110.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
E110.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
E110.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
E110.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
E110.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
E110.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
E110.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
E110.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
E110.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
E110.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
E110.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

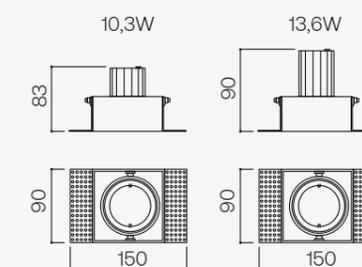

Trim 50 2x1



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
- White



Accessories Accesorios

- Honeycomb
Panal de abeja
- Transparent glass
Cristal transparente
- Frosted glass
Cristal glaseado


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E111.92701820.x	2x10,3W	20°	90	2700K	2x683Lm	67Lm/W
E111.92701840.x	2x10,3W	40°	90	2700K	2x683Lm	67Lm/W
E111.92701860.x	2x10,3W	60°	90	2700K	2x683Lm	67Lm/W
E111.93001820.x	2x10,3W	20°	90	3000K	2x779Lm	76Lm/W
E111.93001840.x	2x10,3W	40°	90	3000K	2x779Lm	76Lm/W
E111.93001860.x	2x10,3W	60°	90	3000K	2x779Lm	76Lm/W
E111.94001820.x	2x10,3W	20°	90	4000K	2x870Lm	85Lm/W
E111.94001840.x	2x10,3W	40°	90	4000K	2x870Lm	85Lm/W
E111.94001860.x	2x10,3W	60°	90	4000K	2x870Lm	85Lm/W
E111.92702425.x	2x13,6W	25°	90	2700K	2x1080Lm	80Lm/W
E111.92702443.x	2x13,6W	43°	90	2700K	2x1080Lm	80Lm/W
E111.92702460.x	2x13,6W	60°	90	2700K	2x1080Lm	80Lm/W
E111.93002425.x	2x13,6W	25°	90	3000K	2x1217Lm	90Lm/W
E111.93002443.x	2x13,6W	43°	90	3000K	2x1217Lm	90Lm/W
E111.93002460.x	2x13,6W	60°	90	3000K	2x1217Lm	90Lm/W
E111.94002425.x	2x13,6W	25°	90	4000K	2x1318Lm	97Lm/W
E111.94002443.x	2x13,6W	43°	90	4000K	2x1318Lm	97Lm/W
E111.94002460.x	2x13,6W	60°	90	4000K	2x1318Lm	97Lm/W

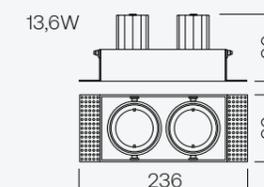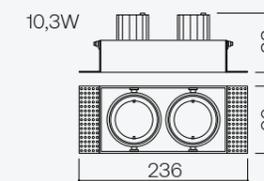

Trim 50 3x1



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
- White



Accessories Accesorios

- Honeycomb
Panal de abeja
- Transparent glass
Cristal transparente
- Frosted glass
Cristal glaseado


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E112.92702720.x	3x10,3W	20°	90	2700K	3x683Lm	67Lm/W
E112.92702740.x	3x10,3W	40°	90	2700K	3x683Lm	67Lm/W
E112.92702760.x	3x10,3W	60°	90	2700K	3x683Lm	67Lm/W
E112.93002720.x	3x10,3W	20°	90	3000K	3x779Lm	76Lm/W
E112.93002740.x	3x10,3W	40°	90	3000K	3x779Lm	76Lm/W
E112.93002760.x	3x10,3W	60°	90	3000K	3x779Lm	76Lm/W
E112.94002720.x	3x10,3W	20°	90	4000K	3x870Lm	85Lm/W
E112.94002740.x	3x10,3W	40°	90	4000K	3x870Lm	85Lm/W
E112.94002760.x	3x10,3W	60°	90	4000K	3x870Lm	85Lm/W
E112.92703625.x	3x13,6W	25°	90	2700K	3x1080Lm	80Lm/W
E112.92703643.x	3x13,6W	43°	90	2700K	3x1080Lm	80Lm/W
E112.92703660.x	3x13,6W	60°	90	2700K	3x1080Lm	80Lm/W
E112.93003625.x	3x13,6W	25°	90	3000K	3x1217Lm	90Lm/W
E112.93003643.x	3x13,6W	43°	90	3000K	3x1217Lm	90Lm/W
E112.93003660.x	3x13,6W	60°	90	3000K	3x1217Lm	90Lm/W
E112.94003625.x	3x13,6W	25°	90	4000K	3x1318Lm	97Lm/W
E112.94003643.x	3x13,6W	43°	90	4000K	3x1318Lm	97Lm/W
E112.94003660.x	3x13,6W	60°	90	4000K	3x1318Lm	97Lm/W

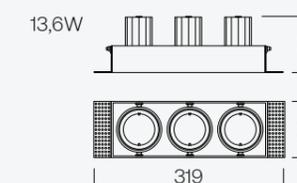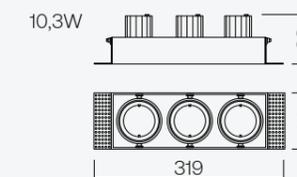

Panel Light

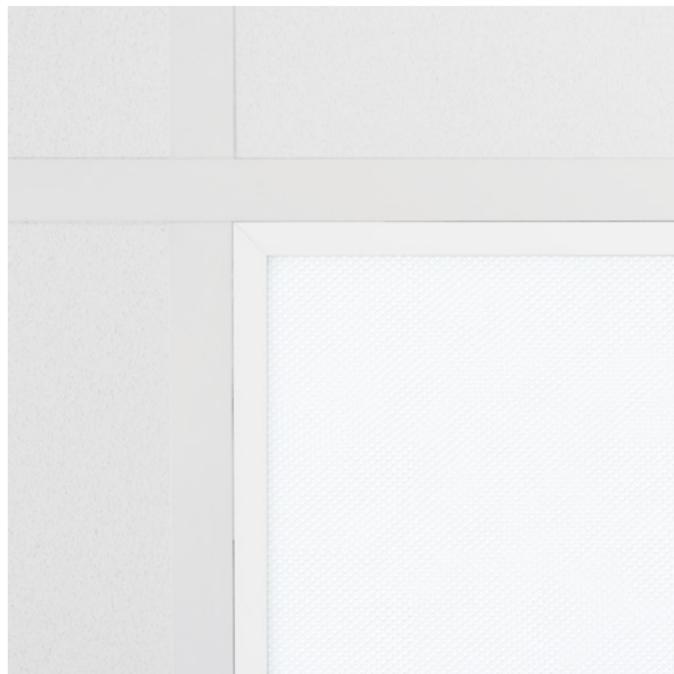

Luminary

Luminária

- L80 > 50000h
- MacAdam 3
- UGR <19

Optic Óptica

- Opal diffuser

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PUSH ONLY
- DALI-2

Protection Protección

- IP40


Finishes Acabados

- White

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E038.83002690.x	30W	90°	80	3000K	3600Lm	120Lm/W
E038.84002690.x	30W	90°	80	4000K	3600Lm	120Lm/W

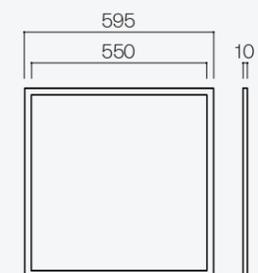

Round



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

Optic Óptica

- Opal diffuser

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20


Finishes Acabados

- White



Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E336.840031C0.x	36W	120°	80	4000K	3960Lm	110Lm/W

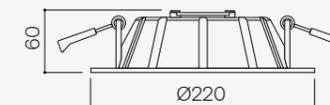

Vand

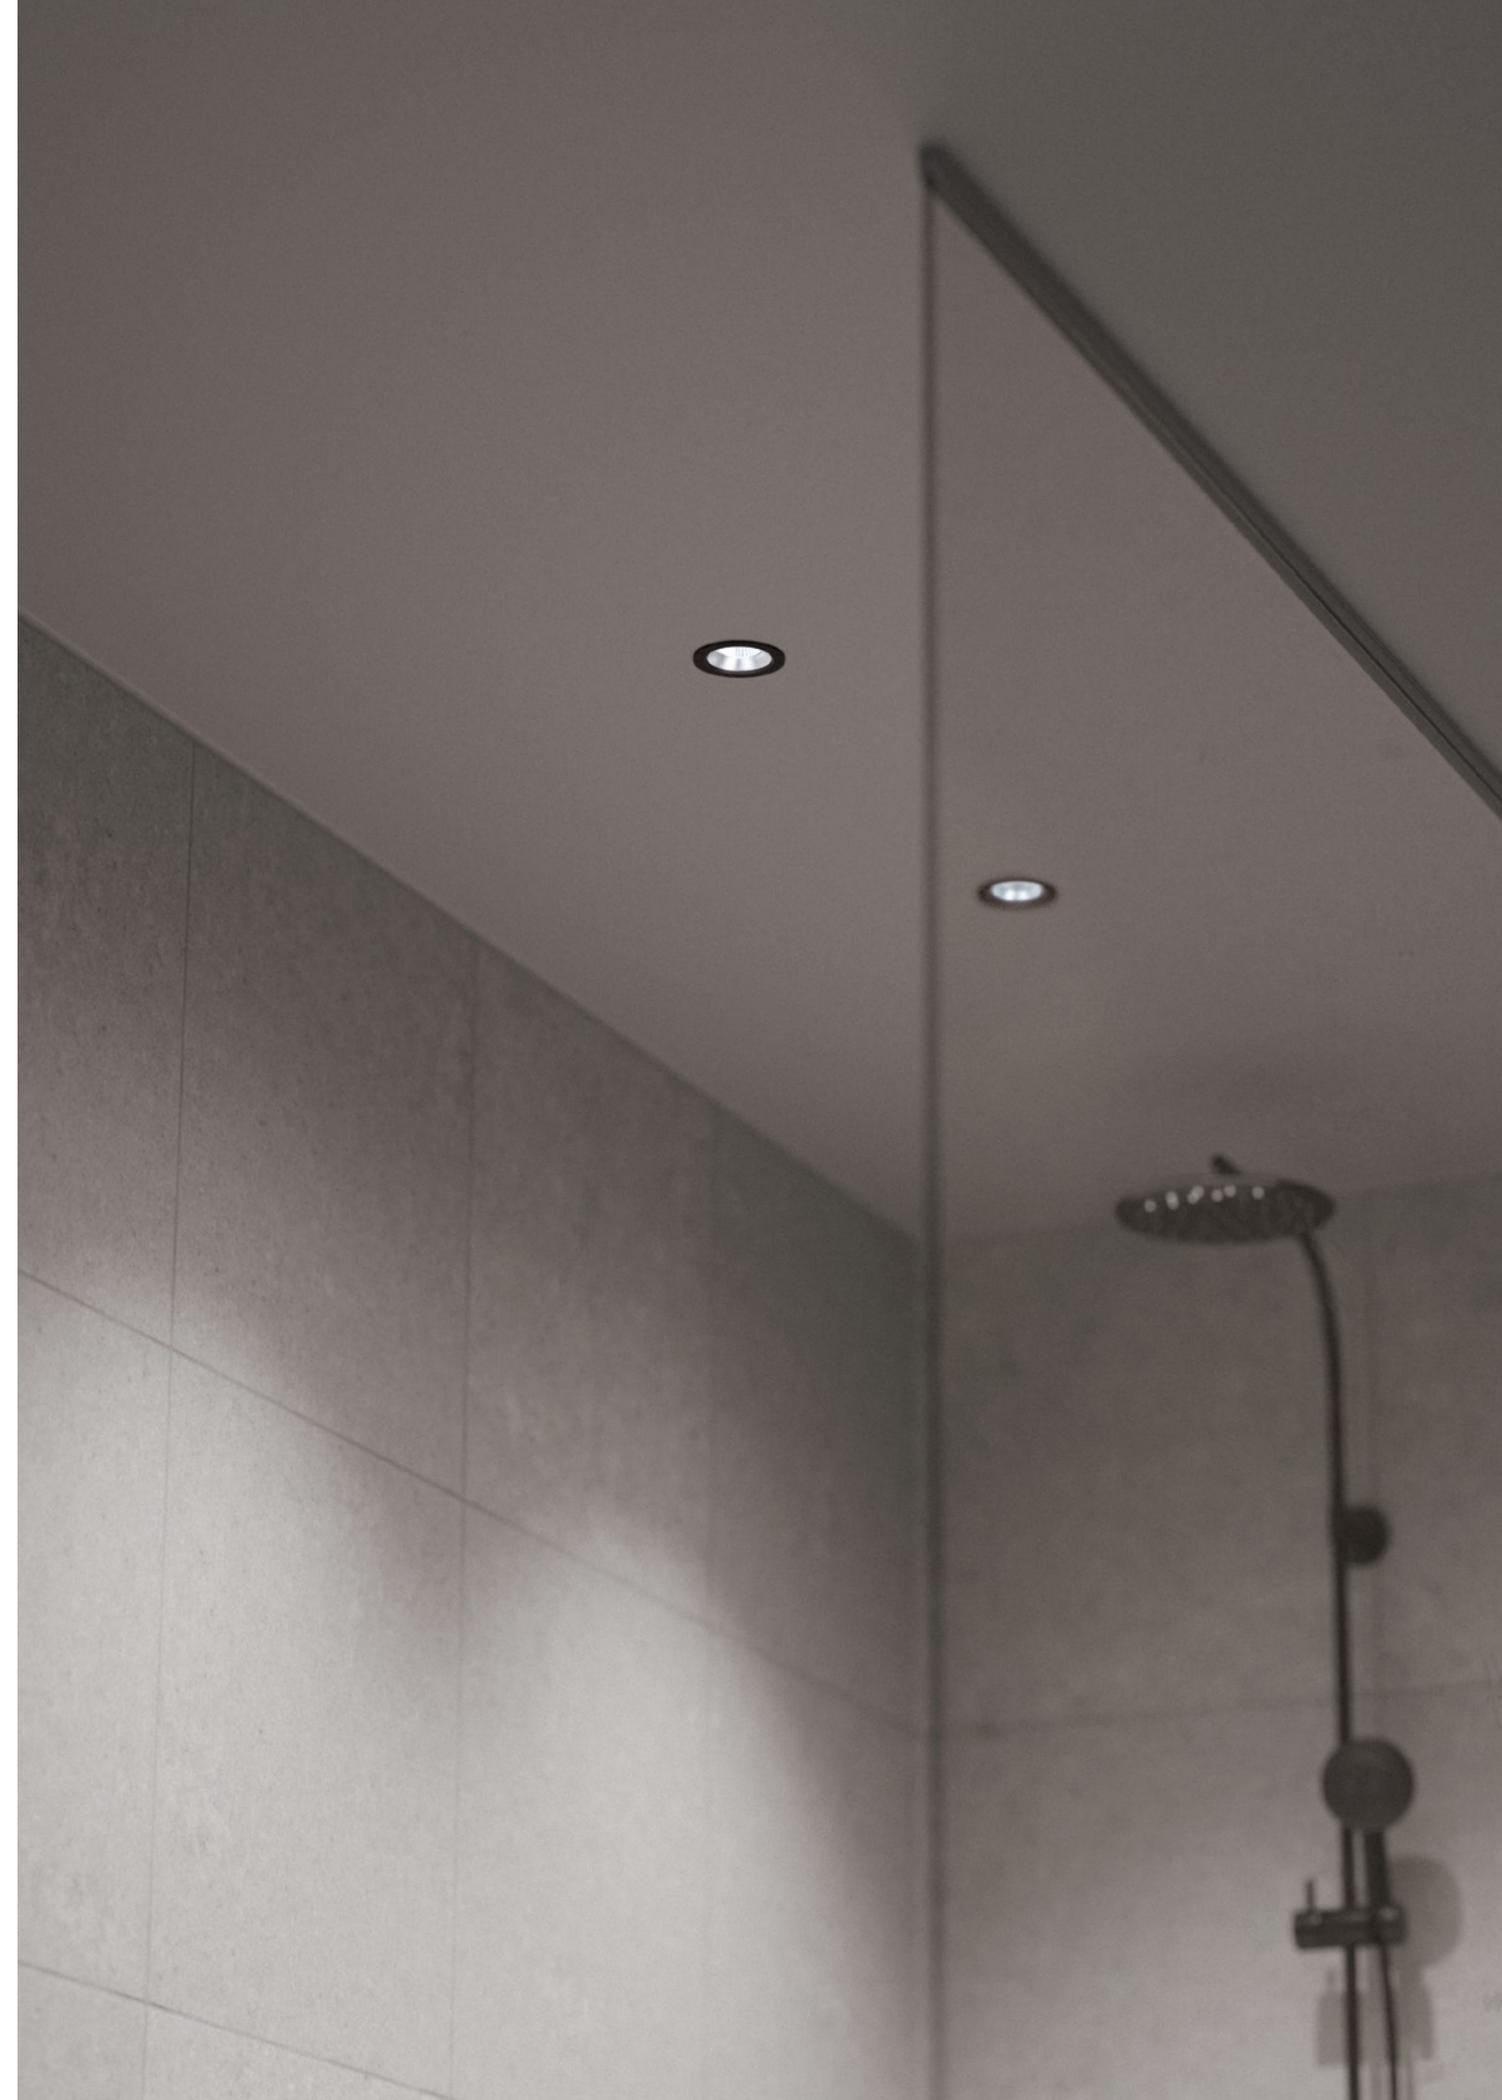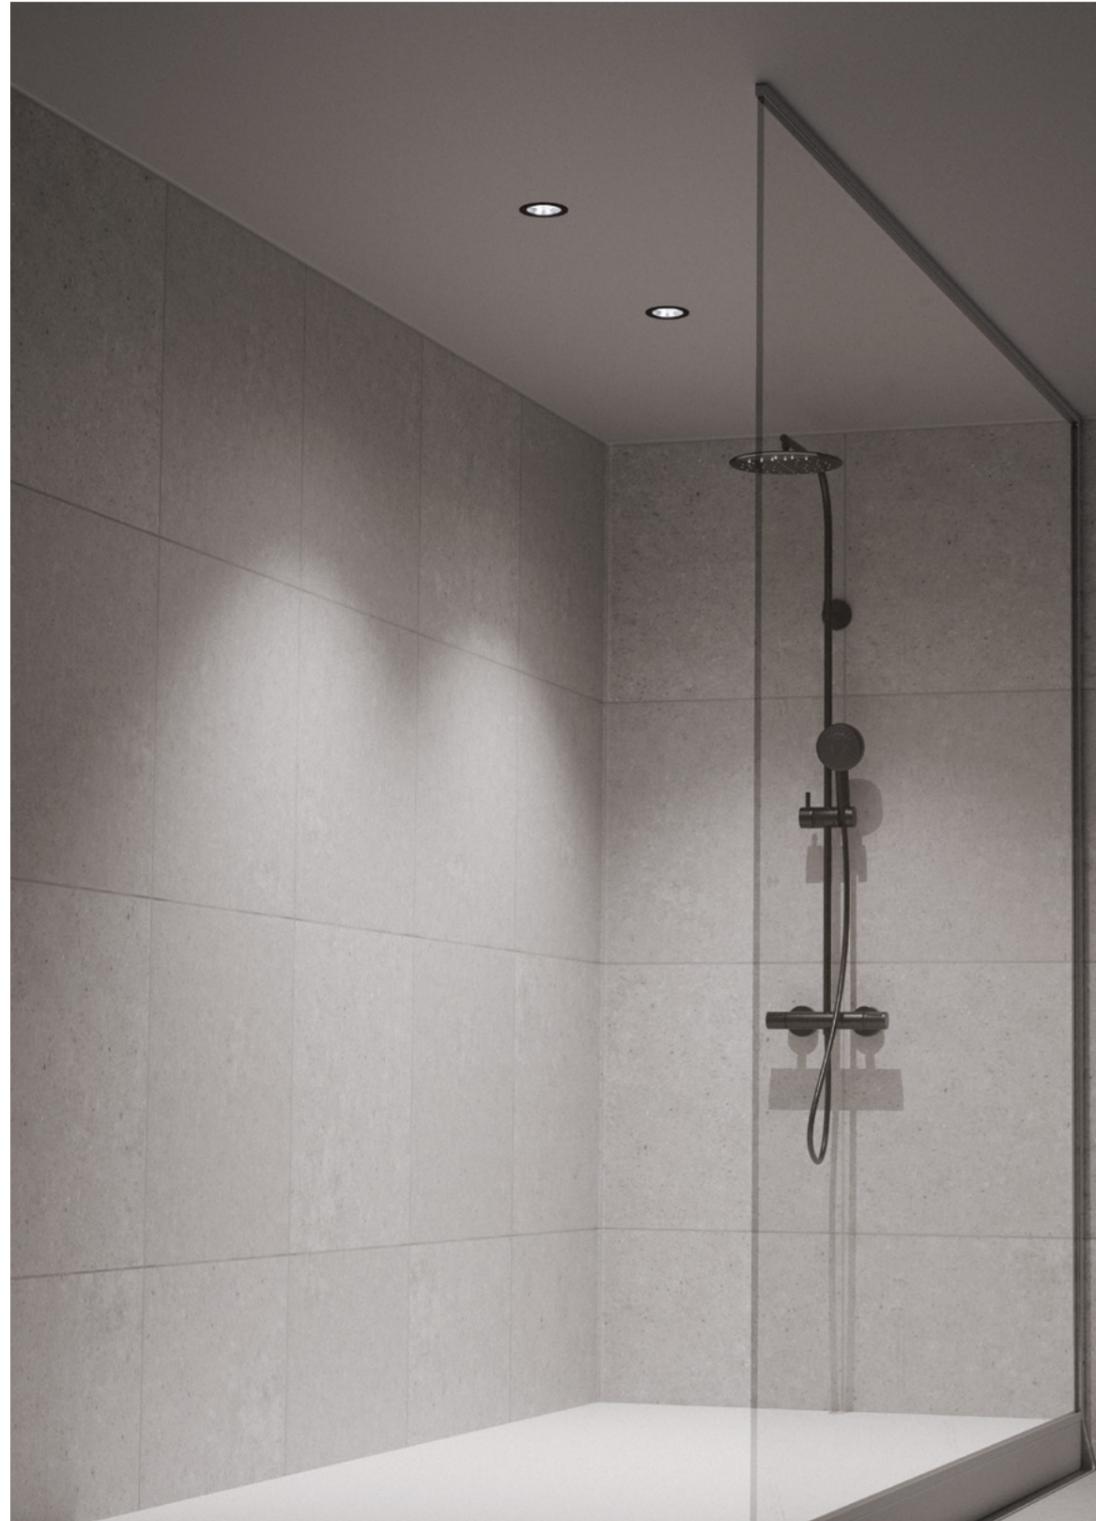

Vand



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP65

Finishes Acabados

- Black
- White



Accessories Accesorios

- Honeycomb
Panel de abeja
- Transparent glass
Cristal transparente
- Frosted glass
Cristal glaseado


Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
L080.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
L080.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
L080.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
L080.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
L080.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
L080.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
L080.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
L080.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
L080.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
L080.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
L080.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
L080.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
L080.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
L080.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
L080.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
L080.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
L080.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
L080.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W



Asymmetric In

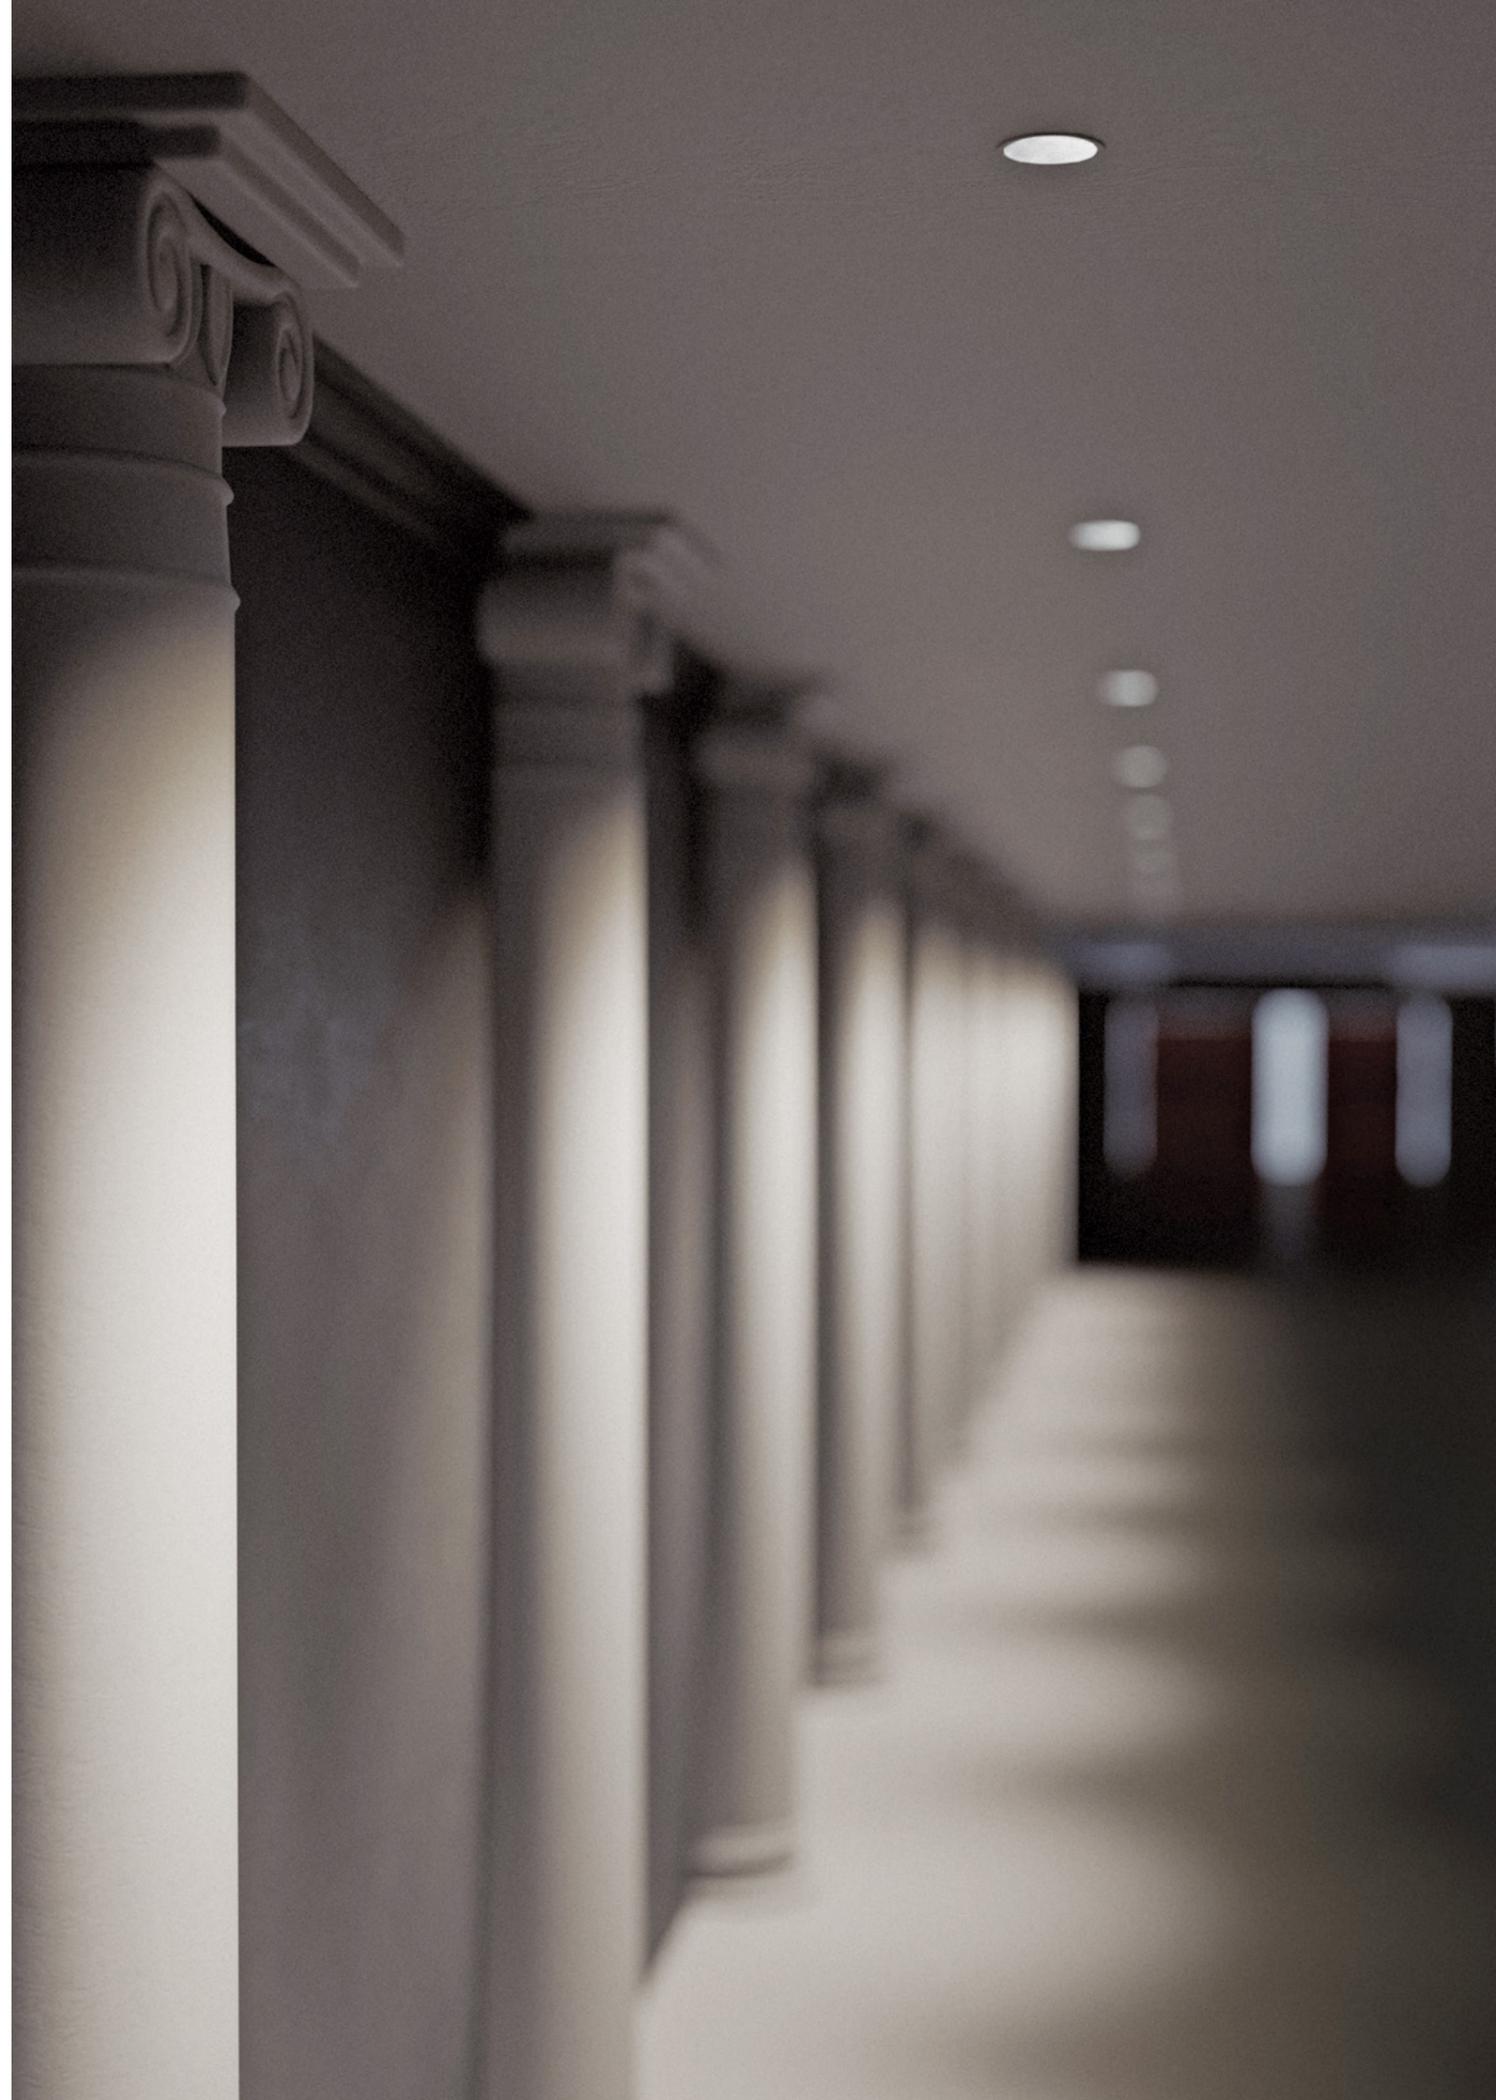

Asymmetric In

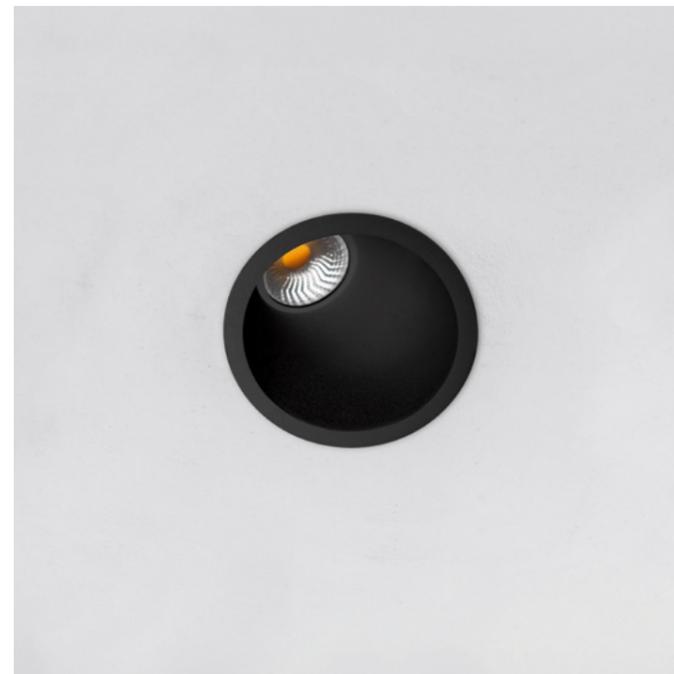

Luminary

- Luminária**
 • L70 > 50000h
 • MacAdam 3

LED/Optic Óptica

- COB LUMINUS
 • Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
 • PH-CUT
 • 1-10V
 • PUSH ONLY
 • DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
 ● White


Accessories Accesorios

- Honeycomb
Panal de abeja
 • Transparent glass
Cristal transparente
 • Frosted glass
Cristal glaseado

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
E189.92700920.x	10,3W	20°	90	2700K	683Lm	67Lm/W
E189.92700940.x	10,3W	40°	90	2700K	683Lm	67Lm/W
E189.92700960.x	10,3W	60°	90	2700K	683Lm	67Lm/W
E189.93000920.x	10,3W	20°	90	3000K	779Lm	76Lm/W
E189.93000940.x	10,3W	40°	90	3000K	779Lm	76Lm/W
E189.93000960.x	10,3W	60°	90	3000K	779Lm	76Lm/W
E189.94000920.x	10,3W	20°	90	4000K	870Lm	85Lm/W
E189.94000940.x	10,3W	40°	90	4000K	870Lm	85Lm/W
E189.94000960.x	10,3W	60°	90	4000K	870Lm	85Lm/W
E189.92701225.x	13,6W	25°	90	2700K	1080Lm	80Lm/W
E189.92701243.x	13,6W	43°	90	2700K	1080Lm	80Lm/W
E189.92701260.x	13,6W	60°	90	2700K	1080Lm	80Lm/W
E189.93001225.x	13,6W	25°	90	3000K	1217Lm	90Lm/W
E189.93001243.x	13,6W	43°	90	3000K	1217Lm	90Lm/W
E189.93001260.x	13,6W	60°	90	3000K	1217Lm	90Lm/W
E189.94001225.x	13,6W	25°	90	4000K	1318Lm	97Lm/W
E189.94001243.x	13,6W	43°	90	4000K	1318Lm	97Lm/W
E189.94001260.x	13,6W	60°	90	4000K	1318Lm	97Lm/W

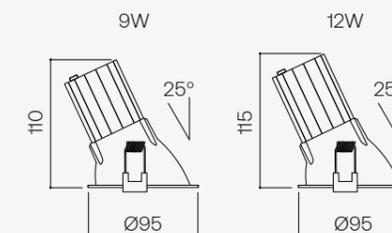

Cylinder



GU10 Bulb not included
(MR16/GU10 - Ø50 mm)

86 — Surface

Voltage Voltaje
• 220-240VAC

Protection Protección
• IP20

Finishes Acabados
● Black
● White

Downloads Descargas



Cod.
S044.00000000.x



Spot Torch Base



GU10 Bulb not included
(MR16/GU10 - Ø50 mm)

Voltage Voltaje
• 220-240VAC


Protection Protección
• IP20

Finishes Acabados
● Black
● White

Downloads Descargas



Cod.
P611.00000000.x

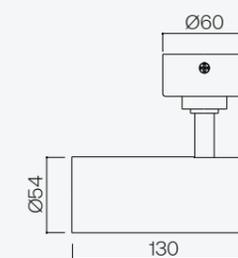

Nixe 5x1 Surface



Nixe 5x1 Surface



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- MP LED OSRAM
- Reflector

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20


Finishes Acabados

- Black

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
S001.92700915.x	11,1W	15°	90	2700K	875Lm	79Lm/W
S001.92700945.x	11,1W	45°	90	2700K	875Lm	79Lm/W
S001.93000915.x	11,1W	15°	90	3000K	875Lm	79Lm/W
S001.93000945.x	11,1W	45°	90	3000K	875Lm	79Lm/W

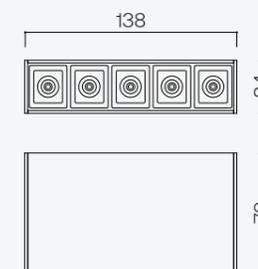

Nixeline Pendant



Nixeline Pendant

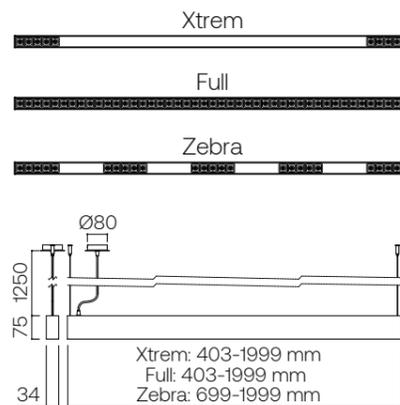

Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- MP LED OSRAM
- Reflector

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black

Xtrem Accessories

Accesorios

- 4m cables
- Cables de 4m*

Full Accessories

Accesorios

- 4m cables
- Cables de 4m*
- 802-1733 mm:
- 1h emergency kit
- Kit de emergencia 1h*

Zebra Accessories

Accesorios

- 4m cables
- Cables de 4m*
- 1201-1999 mm:
- 1h emergency kit
- Kit de emergencia 1h*

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nixeline Pendant Xtrem 403 mm						
XCA0.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XCA0.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XCA0.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XCA0.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Pendant Xtrem 536 mm						
XDA0.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XDA0.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XDA0.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XDA0.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Pendant Xtrem 669 mm						
XEA0.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XEA0.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XEA0.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XEA0.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Pendant Xtrem 802 mm						
XFA0.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XFA0.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XFA0.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XFA0.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Pendant Xtrem 935 mm						
XGA0.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XGA0.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XGA0.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XGA0.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Pendant Xtrem 1068 mm						
XHA0.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XHA0.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XHA0.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XHA0.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Pendant Xtrem 1201 mm						
XIA0.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XIA0.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XIA0.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XIA0.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Pendant Xtrem 1334 mm						
XJA0.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XJA0.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XJA0.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XJA0.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Pendant Xtrem 1467 mm						
XKA0.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XKA0.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XKA0.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XKA0.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Pendant Xtrem 1600 mm						
XLA0.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XLA0.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XLA0.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XLA0.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Pendant Xtrem 1733 mm						
XMA0.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XMA0.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XMA0.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XMA0.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Pendant Xtrem 1866 mm						
XNA0.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XNA0.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XNA0.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XNA0.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Pendant Xtrem 1999 mm						
XOA0.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XOA0.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XOA0.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XOA0.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W


Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nixeline Pendant Full 403 mm						
YCA0.92701715.x	19,3W	15°	90	2700K	1680Lm	88Lm/W
YCA0.92701745.x	19,3W	45°	90	2700K	1680Lm	88Lm/W
YCA0.93001715.x	19,3W	15°	90	3000K	1680Lm	88Lm/W
YCA0.93001745.x	19,3W	45°	90	3000K	1680Lm	88Lm/W
Nixeline Pendant Full 536 mm						
YDA0.92702215.x	25,7W	15°	90	2700K	2240Lm	88Lm/W
YDA0.92702245.x	25,7W	45°	90	2700K	2240Lm	88Lm/W
YDA0.93002215.x	25,7W	15°	90	3000K	2240Lm	88Lm/W
YDA0.93002245.x	25,7W	45°	90	3000K	2240Lm	88Lm/W
Nixeline Pendant Full 669 mm						
YEA0.92702815.x	32,2W	15°	90	2700K	2800Lm	87Lm/W
YEA0.92702845.x	32,2W	45°	90	2700K	2800Lm	87Lm/W
YEA0.93002815.x	32,2W	15°	90	3000K	2800Lm	87Lm/W
YEA0.93002845.x	32,2W	45°	90	3000K	2800Lm	87Lm/W
Nixeline Pendant Full 802 mm						
YFA0.92703315.x	38,6W	15°	90	2700K	3360Lm	88Lm/W
YFA0.92703345.x	38,6W	45°	90	2700K	3360Lm	88Lm/W
YFA0.93003315.x	38,6W	15°	90	3000K	3360Lm	88Lm/W
YFA0.93003345.x	38,6W	45°	90	3000K	3360Lm	88Lm/W
Nixeline Pendant Full 935 mm						
YGA0.92703915.x	45W	15°	90	2700K	3920Lm	88Lm/W
YGA0.92703945.x	45W	45°	90	2700K	3920Lm	88Lm/W
YGA0.93003915.x	45W	15°	90	3000K	3920Lm	88Lm/W
YGA0.93003945.x	45W	45°	90	3000K	3920Lm	88Lm/W
Nixeline Pendant Full 1068 mm						
YHA0.92704515.x	51,5W	15°	90	2700K	4480Lm	87Lm/W
YHA0.92704545.x	51,5W	45°	90	2700K	4480Lm	87Lm/W
YHA0.93004515.x	51,5W	15°	90	3000K	4480Lm	87Lm/W
YHA0.93004545.x	51,5W	45°	90	3000K	4480Lm	87Lm/W
Nixeline Pendant Full 1201 mm						
YIA0.92705015.x	57,9W	15°	90	2700K	5040Lm	88Lm/W
YIA0.92705045.x	57,9W	45°	90	2700K	5040Lm	88Lm/W
YIA0.93005015.x	57,9W	15°	90	3000K	5040Lm	88Lm/W
YIA0.93005045.x	57,9W	45°	90	3000K	5040Lm	88Lm/W
Nixeline Pendant Full 1334 mm						
YJA0.92705615.x	64,4W	15°	90	2700K	5600Lm	87Lm/W
YJA0.92705645.x	64,4W	45°	90	2700K	5600Lm	87Lm/W
YJA0.93005615.x	64,4W	15°	90	3000K	5600Lm	87Lm/W
YJA0.93005645.x	64,4W	45°	90	3000K	5600Lm	87Lm/W
Nixeline Pendant Full 1467 mm						
YKA0.92706115.x	70,8W	15°	90	2700K	6160Lm	88Lm/W
YKA0.92706145.x	70,8W	45°	90	2700K	6160Lm	88Lm/W
YKA0.93006115.x	70,8W	15°	90	3000K	6160Lm	88Lm/W
YKA0.93006145.x	70,8W	45°	90	3000K	6160Lm	88Lm/W
Nixeline Pendant Full 1600 mm						
YLA0.92706715.x	77,2W	15°	90	2700K	6720Lm	88Lm/W
YLA0.92706745.x	77,2W	45°	90	2700K	6720Lm	88Lm/W
YLA0.93006715.x	77,2W	15°	90	3000K	6720Lm	88Lm/W
YLA0.93006745.x	77,2W	45°	90	3000K	6720Lm	88Lm/W
Nixeline Pendant Full 1733 mm						
YMA0.92707315.x	83,7W	15°	90	2700K	7280Lm	87Lm/W
YMA0.92707345.x	83,7W	45°	90	2700K	7280Lm	87Lm/W
YMA0.93007315.x	83,7W	15°	90	3000K	7280Lm	87Lm/W
YMA0.93007345.x	83,7W	45°	90	3000K	7280Lm	87Lm/W
Nixeline Pendant Full 1866 mm						
YNA0.92707815.x	90,1W	15°	90	2700K	7840Lm	88Lm/W
YNA0.92707845.x	90,1W	45°	90	2700K	7840Lm	88Lm/W
YNA0.93007815.x	90,1W	15°	90	3000K	7840Lm	88Lm/W
YNA0.93007845.x	90,1W	45°	90	3000K	7840Lm	88Lm/W
Nixeline Pendant Full 1999 mm						
YOA0.92708415.x	96,6W	15°	90	2700K	8400Lm	87Lm/W
YOA0.92708445.x	96,6W	45°	90	2700K	8400Lm	87Lm/W
YOA0.93008415.x	96,6W	15°	90	3000K	8400Lm	87Lm/W
YOA0.93008445.x	96,6W	45°	90	3000K	8400Lm	87Lm/W

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nixeline Pendant Zebra 669 mm						
ZEA0.92701715.x	19,3W	15°	90	2700K	1680Lm	88Lm/W
ZEA0.92701745.x	19,3W	45°	90	2700K	1680Lm	88Lm/W
ZEA0.93001715.x	19,3W	15°	90	3000K	1680Lm	88Lm/W
ZEA0.93001745.x	19,3W	45°	90	3000K	1680Lm	88Lm/W
Nixeline Pendant Zebra 935 mm						
ZGA0.92702215.x	25,7W	15°	90	2700K	2240Lm	88Lm/W
ZGA0.92702245.x	25,7W	45°	90	2700K	2240Lm	88Lm/W
ZGA0.93002215.x	25,7W	15°	90	3000K	2240Lm	88Lm/W
ZGA0.93002245.x	25,7W	45°	90	3000K	2240Lm	88Lm/W
Nixeline Pendant Zebra 1201 mm						
ZIA0.92702815.x	32,2W	15°	90	2700K	2800Lm	87Lm/W
ZIA0.92702845.x	32,2W	45°	90	2700K	2800Lm	87Lm/W
ZIA0.93002815.x	32,2W	15°	90	3000K	2800Lm	87Lm/W
ZIA0.93002845.x	32,2W	45°	90	3000K	2800Lm	87Lm/W
Nixeline Pendant Zebra 1467 mm						
ZKA0.92703315.x	38,6W	15°	90	2700K	3360Lm	88Lm/W
ZKA0.92703345.x	38,6W	45°	90	2700K	3360Lm	88Lm/W
ZKA0.93003315.x	38,6W	15°	90	3000K	3360Lm	88Lm/W
ZKA0.93003345.x	38,6W	45°	90	3000K	3360Lm	88Lm/W
Nixeline Pendant Zebra 1733 mm						
ZMA0.92703915.x	45W	15°	90	2700K	3920Lm	88Lm/W
ZMA0.92703945.x	45W	45°	90	2700K	3920Lm	88Lm/W
ZMA0.93003915.x	45W	15°	90	3000K	3920Lm	88Lm/W
ZMA0.93003945.x	45W	45°	90	3000K	3920Lm	88Lm/W
Nixeline Pendant Zebra 1999 mm						
ZOA0.92704515.x	51,5W	15°	90	2700K	4480Lm	87Lm/W
ZOA0.92704545.x	51,5W	45°	90	2700K	4480Lm	87Lm/W
ZOA0.93004515.x	51,5W	15°	90	3000K	4480Lm	87Lm/W
ZOA0.93004545.x	51,5W	45°	90	3000K	4480Lm	87Lm/W

Nixeline Surface

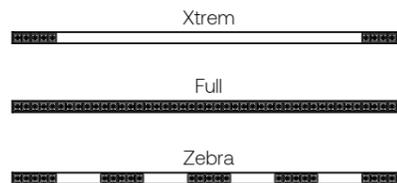

75	Xtrem: 403-1999 mm Full: 403-1999 mm Zebra: 699-1999 mm
34	



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- MP LED OSRAM
- Reflector

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT (only Xtrem)
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black

Xtrem Accessories

Accesorios

- 4m cables
- Cables de 4m*

Full Accessories

Accesorios

- 4m cables
- Cables de 4m*
- 802-1733 mm:
- 1h emergency kit
- Kit de emergencia 1h*

Zebra Accessories

Accesorios

- 1201-1999 mm:
- 1h emergency kit
- Kit de emergencia 1h*

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nixeline Surface Xtrem 403 mm						
XCC4.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XCC4.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XCC4.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XCC4.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Surface Xtrem 536 mm						
XDC4.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XDC4.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XDC4.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XDC4.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Surface Xtrem 669 mm						
XEC4.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XEC4.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XEC4.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XEC4.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Surface Xtrem 802 mm						
XFC4.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XFC4.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XFC4.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XFC4.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Surface Xtrem 935 mm						
XGC4.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XGC4.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XGC4.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XGC4.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Surface Xtrem 1068 mm						
XHC4.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XHC4.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XHC4.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XHC4.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Surface Xtrem 1201 mm						
XIC4.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XIC4.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XIC4.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XIC4.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Surface Xtrem 1334 mm						
XJC4.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XJC4.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XJC4.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XJC4.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Surface Xtrem 1467 mm						
XKC4.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XKC4.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XKC4.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XKC4.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Surface Xtrem 1600 mm						
XLC4.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XLC4.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XLC4.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XLC4.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Surface Xtrem 1733 mm						
XMC4.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XMC4.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XMC4.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XMC4.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Surface Xtrem 1866 mm						
XNC4.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XNC4.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XNC4.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XNC4.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Surface Xtrem 1999 mm						
XOC4.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XOC4.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XOC4.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XOC4.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nixeline Surface Full 403 mm						
YCC4.92701715.x	19,3W	15°	90	2700K	1680Lm	88Lm/W
YCC4.92701745.x	19,3W	45°	90	2700K	1680Lm	88Lm/W
YCC4.93001715.x	19,3W	15°	90	3000K	1680Lm	88Lm/W
YCC4.93001745.x	19,3W	45°	90	3000K	1680Lm	88Lm/W
Nixeline Surface Full 536 mm						
YDC4.92702215.x	25,7W	15°	90	2700K	2240Lm	88Lm/W
YDC4.92702245.x	25,7W	45°	90	2700K	2240Lm	88Lm/W
YDC4.93002215.x	25,7W	15°	90	3000K	2240Lm	88Lm/W
YDC4.93002245.x	25,7W	45°	90	3000K	2240Lm	88Lm/W
Nixeline Surface Full 669 mm						
YEC4.92702815.x	32,2W	15°	90	2700K	2800Lm	87Lm/W
YEC4.92702845.x	32,2W	45°	90	2700K	2800Lm	87Lm/W
YEC4.93002815.x	32,2W	15°	90	3000K	2800Lm	87Lm/W
YEC4.93002845.x	32,2W	45°	90	3000K	2800Lm	87Lm/W
Nixeline Surface Full 802 mm						
YFC4.92703315.x	38,6W	15°	90	2700K	3360Lm	88Lm/W
YFC4.92703345.x	38,6W	45°	90	2700K	3360Lm	88Lm/W
YFC4.93003315.x	38,6W	15°	90	3000K	3360Lm	88Lm/W
YFC4.93003345.x	38,6W	45°	90	3000K	3360Lm	88Lm/W
Nixeline Surface Full 935 mm						
YGC4.92703915.x	45W	15°	90	2700K	3920Lm	88Lm/W
YGC4.92703945.x	45W	45°	90	2700K	3920Lm	88Lm/W
YGC4.93003915.x	45W	15°	90	3000K	3920Lm	88Lm/W
YGC4.93003945.x	45W	45°	90	3000K	3920Lm	88Lm/W
Nixeline Surface Full 1068 mm						
YHC4.92704515.x	51,5W	15°	90	2700K	4480Lm	87Lm/W
YHC4.92704545.x	51,5W	45°	90	2700K	4480Lm	87Lm/W
YHC4.93004515.x	51,5W	15°	90	3000K	4480Lm	87Lm/W
YHC4.93004545.x	51,5W	45°	90	3000K	4480Lm	87Lm/W
Nixeline Surface Full 1201 mm						
YIC4.92705015.x	57,9W	15°	90	2700K	5040Lm	88Lm/W
YIC4.92705045.x	57,9W	45°	90	2700K	5040Lm	88Lm/W
YIC4.93005015.x	57,9W	15°	90	3000K	5040Lm	88Lm/W
YIC4.93005045.x	57,9W	45°	90	3000K	5040Lm	88Lm/W
Nixeline Surface Full 1334 mm						
YJC4.92705615.x	64,4W	15°	90	2700K	5600Lm	87Lm/W
YJC4.92705645.x	64,4W	45°	90	2700K	5600Lm	87Lm/W
YJC4.93005615.x	64,4W	15°	90	3000K	5600Lm	87Lm/W
YJC4.93005645.x	64,4W	45°	90	3000K	5600Lm	87Lm/W
Nixeline Surface Full 1467 mm						
YKC4.92706115.x	70,8W	15°	90	2700K	6160Lm	88Lm/W
YKC4.92706145.x	70,8W	45°	90	2700K	6160Lm	88Lm/W
YKC4.93006115.x	70,8W	15°	90	3000K	6160Lm	88Lm/W
YKC4.93006145.x	70,8W	45°	90	3000K	6160Lm	88Lm/W
Nixeline Surface Full 1600 mm						
YLC4.92706715.x	77,2W	15°	90	2700K	6720Lm	88Lm/W
YLC4.92706745.x	77,2W	45°	90	2700K	6720Lm	88Lm/W
YLC4.93006715.x	77,2W	15°	90	3000K	6720Lm	88Lm/W
YLC4.93006745.x	77,2W	45°	90	3000K	6720Lm	88Lm/W
Nixeline Surface Full 1733 mm						
YMC4.92707315.x	83,7W	15°	90	2700K	7280Lm	87Lm/W
YMC4.92707345.x	83,7W	45°	90	2700K	7280Lm	87Lm/W
YMC4.93007315.x	83,7W	15°	90	3000K	7280Lm	87Lm/W
YMC4.93007345.x	83,7W	45°	90	3000K	7280Lm	87Lm/W
Nixeline Surface Full 1866 mm						
YNC4.92707815.x	90,1W	15°	90	2700K	7840Lm	88Lm/W
YNC4.92707845.x	90,1W	45°	90	2700K	7840Lm	88Lm/W
YNC4.93007815.x	90,1W	15°	90	3000K	7840Lm	88Lm/W
YNC4.93007845.x	90,1W	45°	90	3000K	7840Lm	88Lm/W
Nixeline Surface Full 1999 mm						
YOC4.92708415.x	96,6W	15°	90	2700K	8400Lm	87Lm/W
YOC4.92708445.x	96,6W	45°	90	2700K	8400Lm	87Lm/W
YOC4.93008415.x	96,6W	15°	90	3000K	8400Lm	87Lm/W
YOC4.93008445.x	96,6W	45°	90	3000K	8400Lm	87Lm/W

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nixeline Surface Zebra 669 mm						
ZEC4.92701715.x	19,3W	15°	90	2700K	1680Lm	88Lm/W
ZEC4.92701745.x	19,3W	45°	90	2700K	1680Lm	88Lm/W
ZEC4.93001715.x	19,3W	15°	90	3000K	1680Lm	88Lm/W
ZEC4.93001745.x	19,3W	45°	90	3000K	1680Lm	88Lm/W
Nixeline Surface Zebra 935 mm						
ZGC4.92702215.x	25,7W	15°	90	2700K	2240Lm	88Lm/W
ZGC4.92702245.x	25,7W	45°	90	2700K	2240Lm	88Lm/W
ZGC4.93002215.x	25,7W	15°	90	3000K	2240Lm	88Lm/W
ZGC4.93002245.x	25,7W	45°	90	3000K	2240Lm	88Lm/W
Nixeline Surface Zebra 1201 mm						
ZIC4.92702815.x	32,2W	15°	90	2700K	2800Lm	87Lm/W
ZIC4.92702845.x	32,2W	45°	90	2700K	2800Lm	87Lm/W
ZIC4.93002815.x	32,2W	15°	90	3000K	2800Lm	87Lm/W
ZIC4.93002845.x	32,2W	45°	90	3000K	2800Lm	87Lm/W
Nixeline Surface Zebra 1467 mm						
ZKC4.92703315.x	38,6W	15°	90	2700K	3360Lm	88Lm/W
ZKC4.92703345.x	38,6W	45°	90	2700K	3360Lm	88Lm/W
ZKC4.93003315.x	38,6W	15°	90	3000K	3360Lm	88Lm/W
ZKC4.93003345.x	38,6W	45°	90	3000K	3360Lm	88Lm/W
Nixeline Surface Zebra 1733 mm						
ZMC4.92703915.x	45W	15°	90	2700K	3920Lm	88Lm/W
ZMC4.92703945.x	45W	45°	90	2700K	3920Lm	88Lm/W
ZMC4.93003915.x	45W	15°	90	3000K	3920Lm	88Lm/W
ZMC4.93003945.x	45W	45°	90	3000K	3920Lm	88Lm/W
Nixeline Surface Zebra 1999 mm						
ZOC4.92704515.x	51,5W	15°	90	2700K	4480Lm	87Lm/W
ZOC4.92704545.x	51,5W	45°	90	2700K	4480Lm	87Lm/W
ZOC4.93004515.x	51,5W	15°	90	3000K	4480Lm	87Lm/W
ZOC4.93004545.x	51,5W	45°	90	3000K	4480Lm	87Lm/W

Nixeline Trimless

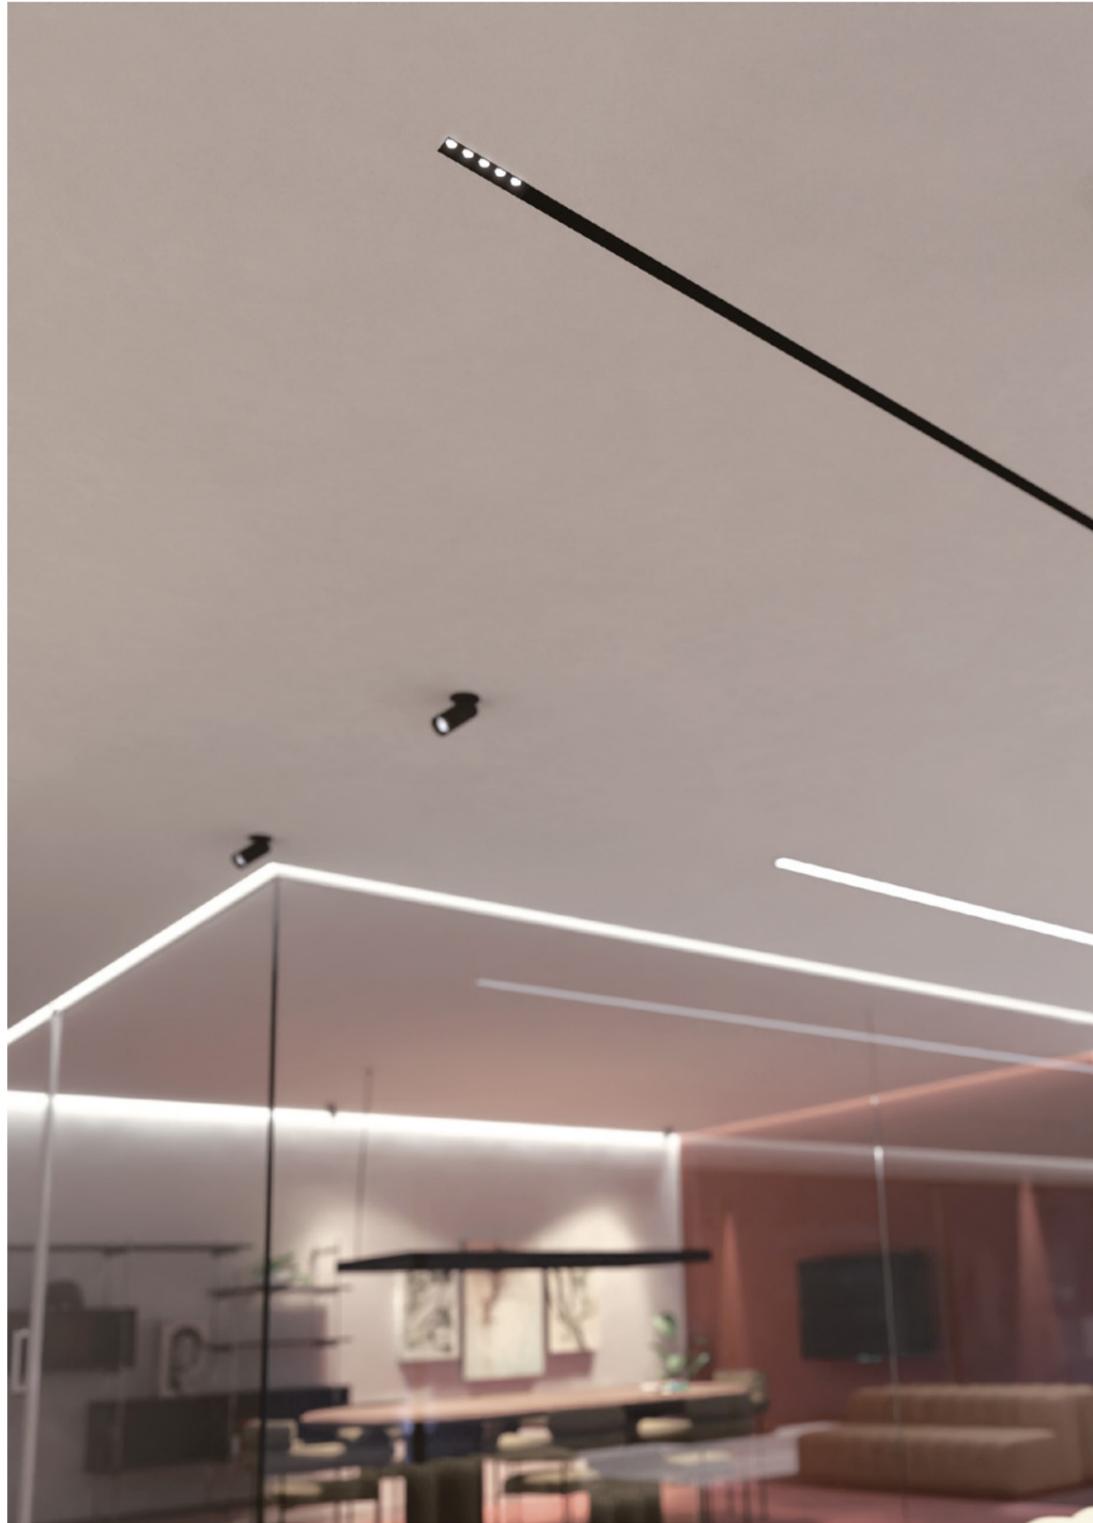

Nixeline Trimless

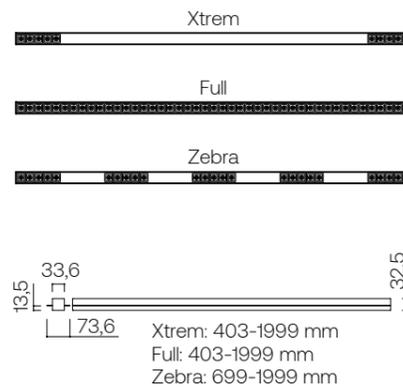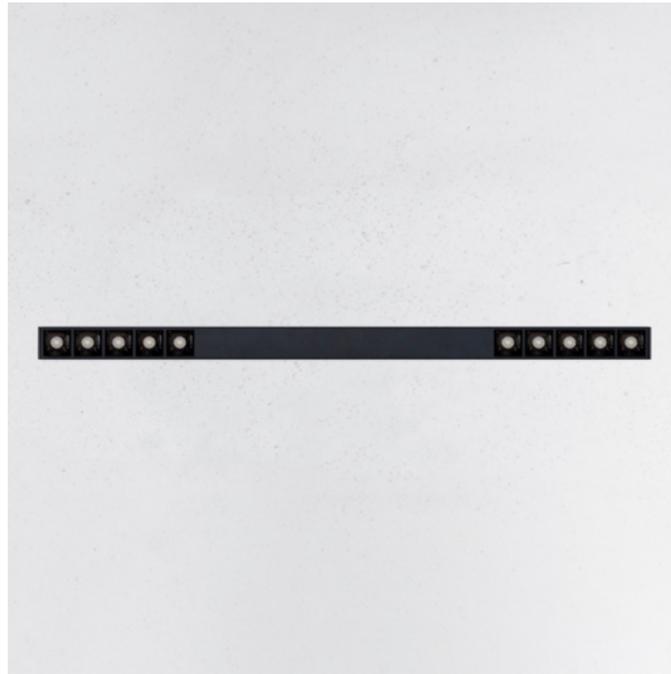

Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- UGR <19

LED/Optic Óptica

- MP LED OSRAM
- Reflector

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT (only Xtrem)
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nixeline Trimless Xtrem 403 mm						
XCC3.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XCC3.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XCC3.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XCC3.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Trimless Xtrem 536 mm						
XDC3.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XDC3.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XDC3.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XDC3.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Trimless Xtrem 669 mm						
XEC3.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XEC3.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XEC3.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XEC3.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Trimless Xtrem 802 mm						
XFC3.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XFC3.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XFC3.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XFC3.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Trimless Xtrem 935 mm						
XGC3.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XGC3.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XGC3.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XGC3.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Trimless Xtrem 1068 mm						
XHC3.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XHC3.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XHC3.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XHC3.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Trimless Xtrem 1201 mm						
XIC3.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XIC3.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XIC3.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XIC3.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Trimless Xtrem 1334 mm						
XJC3.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XJC3.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XJC3.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XJC3.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Trimless Xtrem 1467 mm						
XKC3.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XKC3.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XKC3.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XKC3.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Trimless Xtrem 1600 mm						
XLC3.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XLC3.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XLC3.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XLC3.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Trimless Xtrem 1733 mm						
XMC3.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XMC3.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XMC3.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XMC3.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Trimless Xtrem 1866 mm						
XNC3.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XNC3.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XNC3.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XNC3.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W
Nixeline Trimless Xtrem 1999 mm						
XOC3.92701115.x	12,8W	15°	90	2700K	1120Lm	88Lm/W
XOC3.92701145.x	12,8W	45°	90	2700K	1120Lm	88Lm/W
XOC3.93001115.x	12,8W	15°	90	3000K	1120Lm	88Lm/W
XOC3.93001145.x	12,8W	45°	90	3000K	1120Lm	88Lm/W

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nixeline Trimless Full 403 mm						
YCC3.92701615.x	19,3W	15°	90	2700K	1680Lm	88Lm/W
YCC3.92701645.x	19,3W	45°	90	2700K	1680Lm	88Lm/W
YCC3.93001615.x	19,3W	15°	90	3000K	1680Lm	88Lm/W
YCC3.93001645.x	19,3W	45°	90	3000K	1680Lm	88Lm/W
Nixeline Trimless Full 536 mm						
YDC3.92702215.x	25,7W	15°	90	2700K	2240Lm	88Lm/W
YDC3.92702245.x	25,7W	45°	90	2700K	2240Lm	88Lm/W
YDC3.93002215.x	25,7W	15°	90	3000K	2240Lm	88Lm/W
YDC3.93002245.x	25,7W	45°	90	3000K	2240Lm	88Lm/W
Nixeline Trimless Full 669 mm						
YEC3.92702815.x	32,2W	15°	90	2700K	2800Lm	87Lm/W
YEC3.92702845.x	32,2W	45°	90	2700K	2800Lm	87Lm/W
YEC3.93002815.x	32,2W	15°	90	3000K	2800Lm	87Lm/W
YEC3.93002845.x	32,2W	45°	90	3000K	2800Lm	87Lm/W
Nixeline Trimless Full 802 mm						
YFC3.92703315.x	38,6W	15°	90	2700K	3360Lm	88Lm/W
YFC3.92703345.x	38,6W	45°	90	2700K	3360Lm	88Lm/W
YFC3.93003315.x	38,6W	15°	90	3000K	3360Lm	88Lm/W
YFC3.93003345.x	38,6W	45°	90	3000K	3360Lm	88Lm/W
Nixeline Trimless Full 935 mm						
YGC3.92703915.x	45W	15°	90	2700K	3920Lm	88Lm/W
YGC3.92703945.x	45W	45°	90	2700K	3920Lm	88Lm/W
YGC3.93003915.x	45W	15°	90	3000K	3920Lm	88Lm/W
YGC3.93003945.x	45W	45°	90	3000K	3920Lm	88Lm/W
Nixeline Trimless Full 1068 mm						
YHC3.92704415.x	51,5W	15°	90	2700K	4480Lm	87Lm/W
YHC3.92704445.x	51,5W	45°	90	2700K	4480Lm	87Lm/W
YHC3.93004415.x	51,5W	15°	90	3000K	4480Lm	87Lm/W
YHC3.93004445.x	51,5W	45°	90	3000K	4480Lm	87Lm/W
Nixeline Trimless Full 1201 mm						
YIC3.92705015.x	57,9W	15°	90	2700K	5040Lm	88Lm/W
YIC3.92705045.x	57,9W	45°	90	2700K	5040Lm	88Lm/W
YIC3.93005015.x	57,9W	15°	90	3000K	5040Lm	88Lm/W
YIC3.93005045.x	57,9W	45°	90	3000K	5040Lm	88Lm/W
Nixeline Trimless Full 1334 mm						
YJC3.92705615.x	64,4W	15°	90	2700K	5600Lm	87Lm/W
YJC3.92705645.x	64,4W	45°	90	2700K	5600Lm	87Lm/W
YJC3.93005615.x	64,4W	15°	90	3000K	5600Lm	87Lm/W
YJC3.93005645.x	64,4W	45°	90	3000K	5600Lm	87Lm/W
Nixeline Trimless Full 1467 mm						
YKC3.92706115.x	70,8W	15°	90	2700K	6160Lm	88Lm/W
YKC3.92706145.x	70,8W	45°	90	2700K	6160Lm	88Lm/W
YKC3.93006115.x	70,8W	15°	90	3000K	6160Lm	88Lm/W
YKC3.93006145.x	70,8W	45°	90	3000K	6160Lm	88Lm/W
Nixeline Trimless Full 1600 mm						
YLC3.92706715.x	77,2W	15°	90	2700K	6720Lm	88Lm/W
YLC3.92706745.x	77,2W	45°	90	2700K	6720Lm	88Lm/W
YLC3.93006715.x	77,2W	15°	90	3000K	6720Lm	88Lm/W
YLC3.93006745.x	77,2W	45°	90	3000K	6720Lm	88Lm/W
Nixeline Trimless Full 1733 mm						
YMC3.92707215.x	83,7W	15°	90	2700K	7280Lm	87Lm/W
YMC3.92707245.x	83,7W	45°	90	2700K	7280Lm	87Lm/W
YMC3.93007215.x	83,7W	15°	90	3000K	7280Lm	87Lm/W
YMC3.93007245.x	83,7W	45°	90	3000K	7280Lm	87Lm/W
Nixeline Trimless Full 1866 mm						
YNC3.92707815.x	90,1W	15°	90	2700K	7840Lm	88Lm/W
YNC3.92707845.x	90,1W	45°	90	2700K	7840Lm	88Lm/W
YNC3.93007815.x	90,1W	15°	90	3000K	7840Lm	88Lm/W
YNC3.93007845.x	90,1W	45°	90	3000K	7840Lm	88Lm/W
Nixeline Trimless Full 1999 mm						
YOC3.92708415.x	96,6W	15°	90	2700K	8400Lm	87Lm/W
YOC3.92708445.x	96,6W	45°	90	2700K	8400Lm	87Lm/W
YOC3.93008415.x	96,6W	15°	90	3000K	8400Lm	87Lm/W
YOC3.93008445.x	96,6W	45°	90	3000K	8400Lm	87Lm/W

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Nixeline Trimless Zebra 669 mm						
ZEC3.92701615.x	19,3W	15°	90	2700K	1680Lm	88Lm/W
ZEC3.92701645.x	19,3W	45°	90	2700K	1680Lm	88Lm/W
ZEC3.93001615.x	19,3W	15°	90	3000K	1680Lm	88Lm/W
ZEC3.93001645.x	19,3W	45°	90	3000K	1680Lm	88Lm/W
Nixeline Trimless Zebra 935 mm						
ZGC3.92702215.x	25,7W	15°	90	2700K	2240Lm	88Lm/W
ZGC3.92702245.x	25,7W	45°	90	2700K	2240Lm	88Lm/W
ZGC3.93002215.x	25,7W	15°	90	3000K	2240Lm	88Lm/W
ZGC3.93002245.x	25,7W	45°	90	3000K	2240Lm	88Lm/W
Nixeline Trimless Zebra 1201 mm						
ZIC3.92702815.x	32,2W	15°	90	2700K	2800Lm	87Lm/W
ZIC3.92702845.x	32,2W	45°	90	2700K	2800Lm	87Lm/W
ZIC3.93002815.x	32,2W	15°	90	3000K	2800Lm	87Lm/W
ZIC3.93002845.x	32,2W	45°	90	3000K	2800Lm	87Lm/W
Nixeline Trimless Zebra 1467 mm						
ZKC3.92703315.x	38,6W	15°	90	2700K	3360Lm	88Lm/W
ZKC3.92703345.x	38,6W	45°	90	2700K	3360Lm	88Lm/W
ZKC3.93003315.x	38,6W	15°	90	3000K	3360Lm	88Lm/W
ZKC3.93003345.x	38,6W	45°	90	3000K	3360Lm	88Lm/W
Nixeline Trimless Zebra 1733 mm						
ZMC3.92703915.x	45W	15°	90	2700K	3920Lm	88Lm/W
ZMC3.92703945.x	45W	45°	90	2700K	3920Lm	88Lm/W
ZMC3.93003915.x	45W	15°	90	3000K	3920Lm	88Lm/W
ZMC3.93003945.x	45W	45°	90	3000K	3920Lm	88Lm/W
Nixeline Trimless Zebra 1999 mm						
ZOC3.92704415.x	51,5W	15°	90	2700K	4480Lm	87Lm/W
ZOC3.92704445.x	51,5W	45°	90	2700K	4480Lm	87Lm/W
ZOC3.93004415.x	51,5W	15°	90	3000K	4480Lm	87Lm/W
ZOC3.93004445.x	51,5W	45°	90	3000K	4480Lm	87Lm/W

Rokta

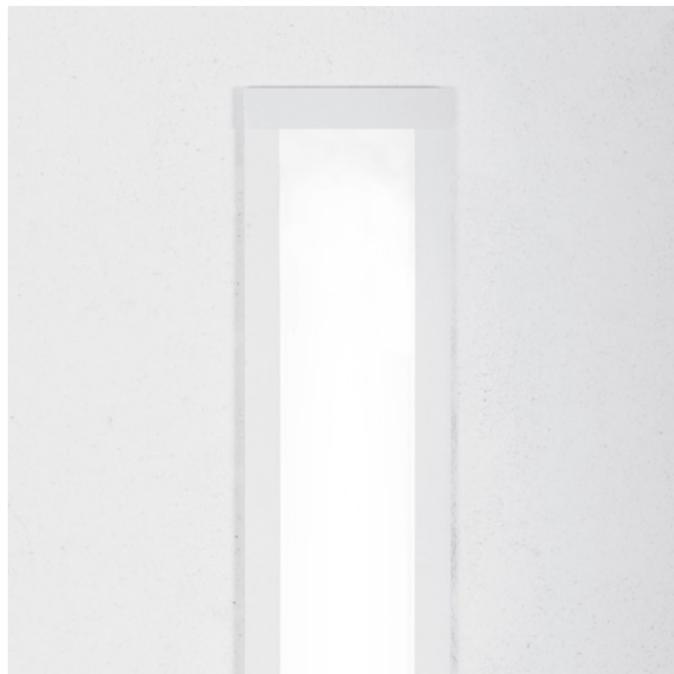

Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- PCB TRIDONIC
- Opal diffuser

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
- White

Accessories Accesorios

- 850-1970 mm:
- 1h emergency kit
- Kit de emergencia 1h*

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
Rokta IND 290mm						
K1A0.827008C0.x	8,8W	120°	80	2700K	810Lm	93Lm/W
K1A0.830008C0.x	8,8W	120°	80	3000K	830Lm	95Lm/W
K1A0.840008C0.x	8,8W	120°	80	4000K	880Lm	100Lm/W
Rokta IND 570mm						
K2A0.827015C0.x	17,7W	120°	80	2700K	1620Lm	92Lm/W
K2A0.830015C0.x	17,7W	120°	80	3000K	1660Lm	94Lm/W
K2A0.840015C0.x	17,7W	120°	80	4000K	1760Lm	100Lm/W
Rokta IND 850mm						
K3A0.827023C0.x	26,5W	120°	80	2700K	2430Lm	92Lm/W
K3A0.830023C0.x	26,5W	120°	80	3000K	2485Lm	94Lm/W
K3A0.840023C0.x	26,5W	120°	80	4000K	2640Lm	100Lm/W
Rokta IND 1130mm						
K4A0.827034C0.x	35,4W	120°	80	2700K	3240Lm	92Lm/W
K4A0.830034C0.x	35,4W	120°	80	3000K	3315Lm	94Lm/W
K4A0.840034C0.x	35,4W	120°	80	4000K	3515Lm	100Lm/W
Rokta IND 1410mm						
K5A0.827038C0.x	44,2W	120°	80	2700K	4050Lm	92Lm/W
K5A0.830038C0.x	44,2W	120°	80	3000K	4145Lm	94Lm/W
K5A0.840038C0.x	44,2W	120°	80	4000K	4395Lm	100Lm/W
Rokta IND 1690mm						
K6A0.827046C0.x	53,1W	120°	80	2700K	4860Lm	92Lm/W
K6A0.830046C0.x	53,1W	120°	80	3000K	4975Lm	94Lm/W
K6A0.840046C0.x	53,1W	120°	80	4000K	5275Lm	100Lm/W
Rokta IND 1970mm						
K7A0.827054C0.x	61,9W	120°	80	2700K	5670Lm	92Lm/W
K7A0.830054C0.x	61,9W	120°	80	3000K	5805Lm	94Lm/W
K7A0.840054C0.x	61,9W	120°	80	4000K	6155Lm	100Lm/W



Tar Mini



magnetic system

Tar Mini

DESCRIPTION


Low voltage electrified rail system with luminaire anchorage using a high power magnetic system. Simple and elegant design. Available in White (Replace 04 with 01 in encoding).

DESCRIPCIÓN

Sistema de carril electrificado de bajo voltaje con anclaje de las luminarias mediante un sistema magnético de gran sujeción. De diseño simple y elegante. Disponible en blanco (Sustituir 04 por 01 en la codificación).

MECHANICAL INSTALLATION - INSTALACIÓN MECÁNICA

surface
superficie

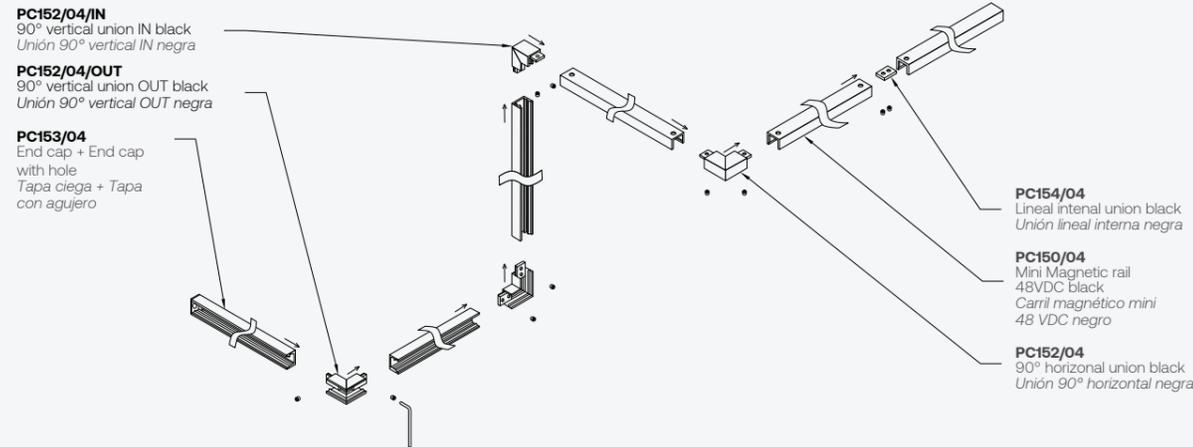

ACC400N

1500 mm suspension kit TAR42 black (1 per meter)
Kit de suspensión 1500 mm para Tar Mini Negro (Cada metro)

1900423-I

BA13 recessed accessory (1 per meter)
Accesorio de empotramiento BA13 (Cada metro)

1900423-J

White connection box 300 x 100 x 50 mm (Driver not included)
300 x 100 x 50 mm blanca (Drv. no incl.)

ACC400B


1500 mm suspension kit Tar Mini white (1 per meter)
Kit de suspensión 1500 mm para TAR42 Blanco (Cada metro)

1900423-H

Black connection box 300 x 100 x 50 mm (Driver not included)
Caja conexión 300 x 100 x 50 mm negra (Drv. no incl.)

ELECTRIC INSTALLATION - INSTALACIÓN VOLTAJE

surface
superficie

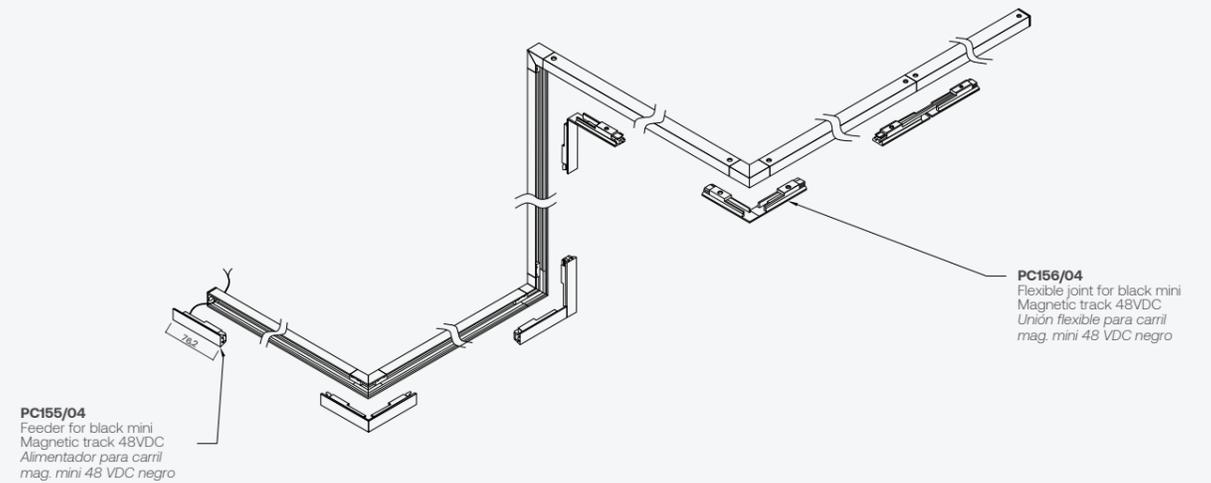


PC 150/04

Black mini Magnetic track 48 VDC
Carril Magnético mini 48 VDC negro

PC 151/04

Black mini blind diffuser
Difusor ciego mini negro

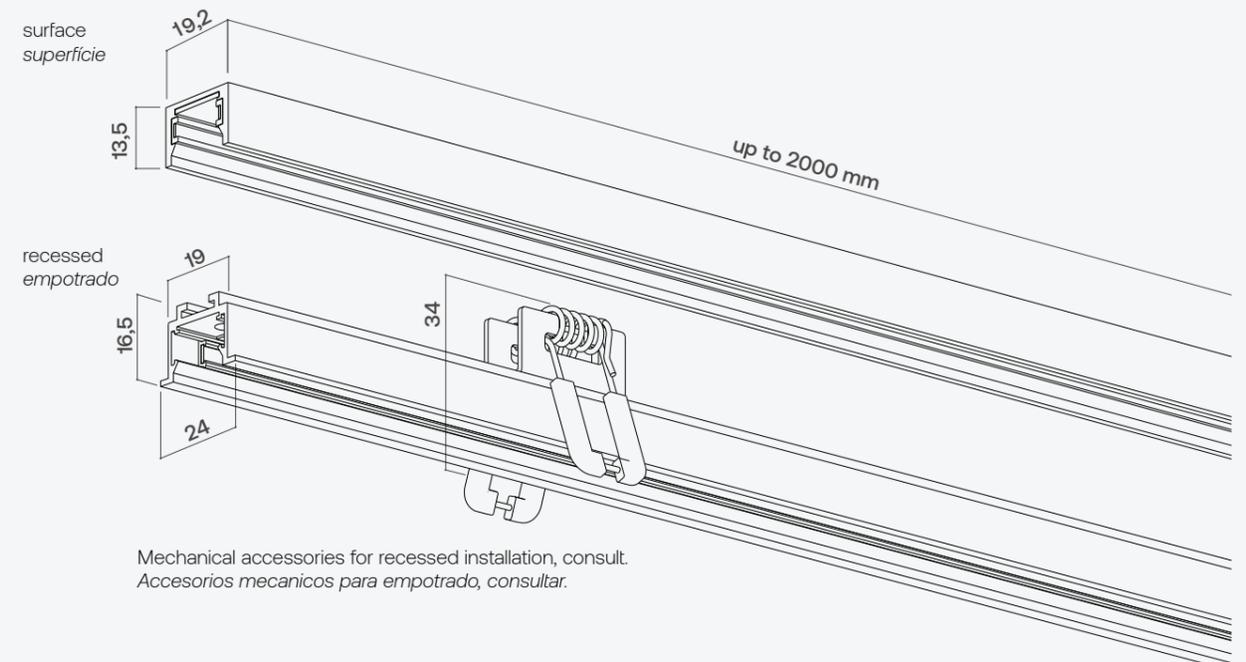

Mechanical accessories for recessed installation, consult.
Accesorios mecanicos para empotrado, consultar.

Tare XS Mag



Luminary

- Luminária
- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20


Finishes Acabados

- Black
- White

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P260.92700336.x	3W	36°	90	2700K	300Lm	100Lm/W
P260.93000336.x	3W	36°	90	3000K	300Lm	100Lm/W

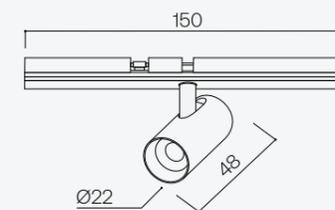

Tare XS2 Mag



Luminary

- Luminária
- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20


Finishes Acabados

- Black
- White


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P261.92700636.x	2x3W	36°	90	2700K	2x300Lm	100Lm/W
P261.93000636.x	2x3W	36°	90	3000K	2x300Lm	100Lm/W

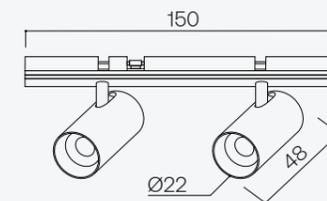

Tare S Mag

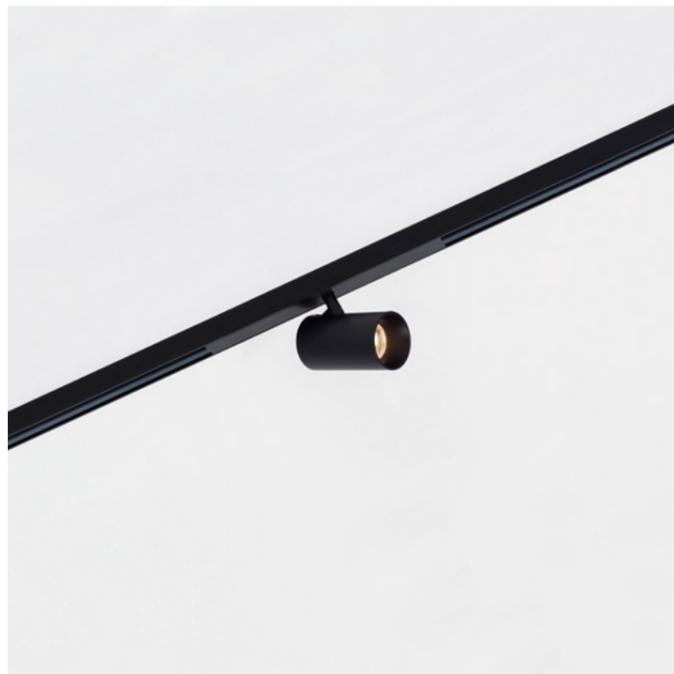

Luminary

- Luminária
- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20


Finishes Acabados

- Black
- White


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P262.92700536.x	5W	36°	90	2700K	500Lm	100Lm/W
P262.93000536.x	5W	36°	90	3000K	500Lm	100Lm/W

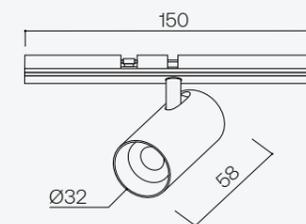

Tare S2 Mag

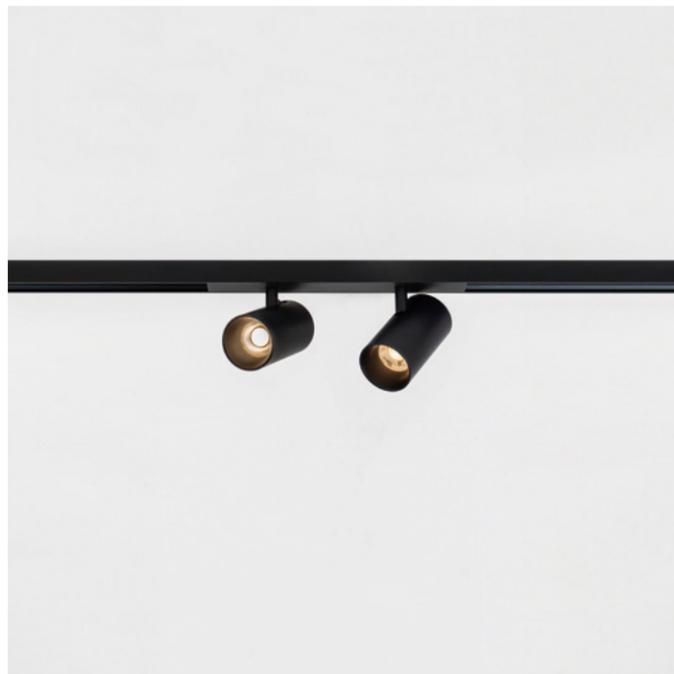

Luminary

- Luminária
- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20


Finishes Acabados

- Black
- White

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P263.92701036.x	2x5W	36°	90	2700K	2x500Lm	100Lm/W
P263.93001036.x	2x5W	36°	90	3000K	2x500Lm	100Lm/W

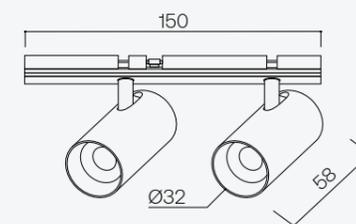

Tare M Mag



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20


Finishes Acabados

- Black
- White


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P264.92700736.x	7W	36°	90	2700K	700Lm	100Lm/W
P264.93000736.x	7W	36°	90	3000K	700Lm	100Lm/W

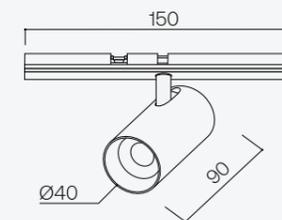

Nixtare 8x1 Mag



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

LED/Optic Óptica

- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20



Finishes Acabados

- Black
- White

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P269.92700840.x	8W	40°	90	2700K	800Lm	100Lm/W
P269.93000840.x	8W	40°	90	3000K	800Lm	100Lm/W

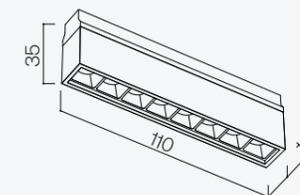

Code 6x1 300 Mag



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

Optic Óptica

- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20


Finishes Acabados

- Black
- White

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P268.92700645.x	6W	45°	90	2700K	600Lm	100Lm/W
P268.93000645.x	6W	45°	90	3000K	600Lm	100Lm/W

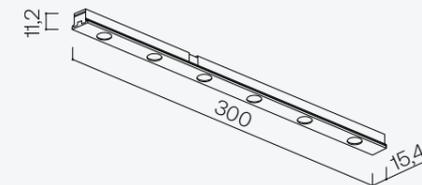

Dash 600 Mag



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- Opal diffuser

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20


Finishes Acabados

- Black

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P267.927012C0.x	12W	120°	90	2700K	1200Lm	100Lm/W
P267.930012C0.x	12W	120°	90	3000K	1200Lm	100Lm/W

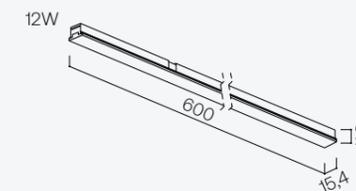

Lp Mag



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - UGR <19

Optic Óptica

- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20


Finishes Acabados

- Black
- White



Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P270.92700836.x	8W	36°	90	2700K	800Lm	100Lm/W
P270.93000836.x	8W	36°	90	3000K	800Lm	100Lm/W

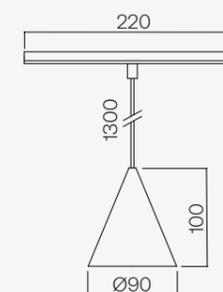

Round driver 150W

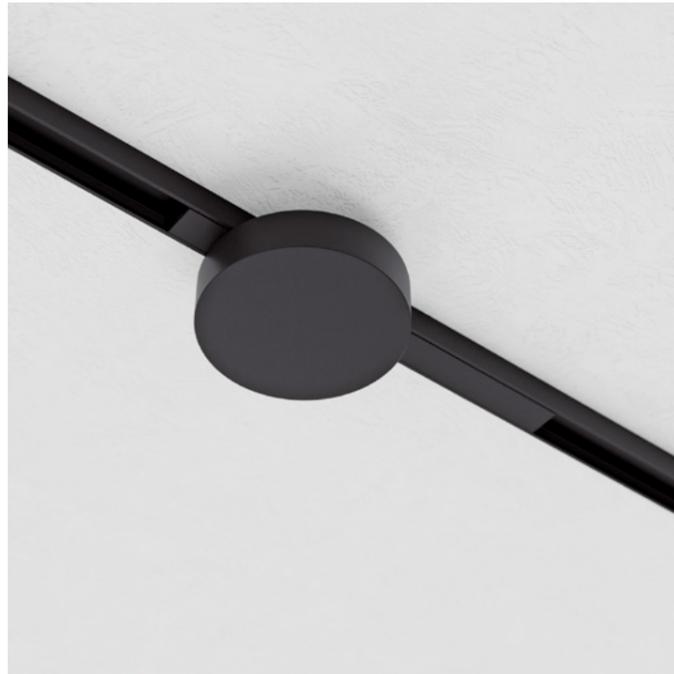

Voltage Voltaje
• PRIMARY 220-240VAC
• SECONDARY 48VDC

Dimming Regulación
• ON-OFF


Protection Protección
• IP20

Finishes Acabados
● Black
● White


Downloads Descargas



Cod.
PC258

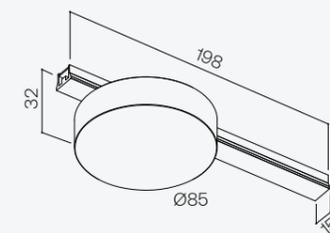

Linear driver 100W



Voltage *Voltaje*

- PRIMARY 220-240VAC
- SECONDARY 48VDC

Dimming *Regulación*

- ON-OFF

Protection *Protección*

- IP20

Finishes *Acabados*


- Black
- White

Downloads *Descargas*




Cod.

PC259

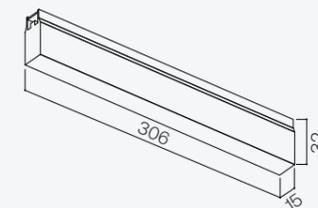


Three-phase Tracklight

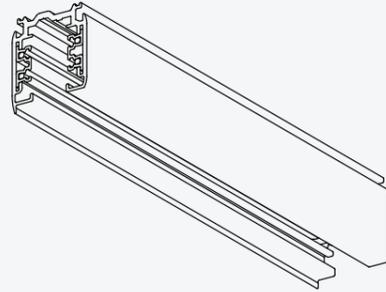

PC020
Three-phase track 1 m
Carril trifásico 1 m

PC021
Three-phase track 2 m
Carril trifásico 2 m

PC022
Three-phase track 3 m
Carril trifásico 3 m

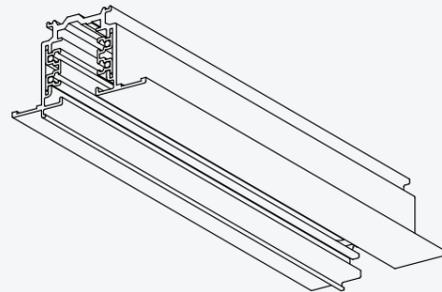


PC023
Recessed three-phase track 1 m
Carril trifásico de empotrar 1 m

PC024
Recessed three-phase track 2 m
Carril trifásico de empotrar 2 m


PC025
Recessed three-phase track 3 m
Carril trifásico de empotrar 3 m




PC030
Right supply
Alimentación derecha




PC031
Left supply
Alimentación izquierda




PC032
Intermediate connection
Unión intermedia



PC033
90° right connection
Unión 90° derecha



PC034
90° left connection
Unión 90° izquierda



PC035
90° adjustable connection
Unión 90° ajustable



PC036
T connection type A
Unión en T tipo A



PC037
T connection type B
Unión en T tipo B



PC038
T connection type C
Unión en T tipo C



PC039
T connection type D
Unión en T tipo D




PC040
X-connection
Unión en X



PC041
End cap
Tapa final




PC042
Ceiling bracket
Soporte a techo



PC043
Suspension kit 1,5m
Kit de suspensión 1,5m

Track with protocol DALI, 1-10V, etc - please consult
Carril con protocolo DALI, 1-10V, etc - a consultar

Pot_65 trk



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB BRIDGELUX
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20


Finishes Acabados

- Black
- White


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P810.92701236.x	13,6W	36°	90	2700K	1624Lm	120Lm/W
P810.93001236.x	13,6W	36°	90	3000K	1697Lm	125Lm/W
P810.94001236.x	13,6W	36°	90	4000K	1743Lm	129Lm/W



Pot_85 trk



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB BRIDGELUX
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20


Finishes Acabados

- Black
- White


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P811.92701836.x	19,5W	36°	90	2700K	2328Lm	120Lm/W
P811.93001836.x	19,5W	36°	90	3000K	2452Lm	126Lm/W
P811.94001836.x	19,5W	36°	90	4000K	2511Lm	129Lm/W

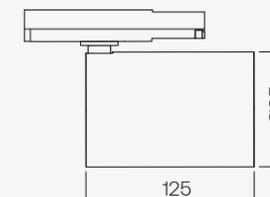

Spot Torch Track



GU10 Bulb not included
(MR16/GU10 - Ø50 mm)

Voltage Voltaje
• 220-240VAC


Protection Protección
• IP20

Finishes Acabados
● Black
● White


Downloads Descargas



Cod.
P610.00000000.x

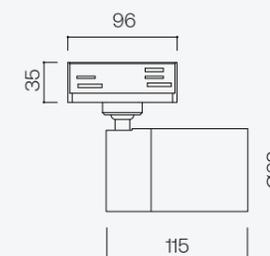

Hit Zoom



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20

Finishes Acabados

- Black
- White


Accessories Accesorios

- Fix Point Base Black
Base Negra Fix Point
- Fix Point Base White
Base Blanca Fix Point


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P602.927011ZM.x	12,4W	8-32°	90	2700K	460Lm	38Lm/W
P602.930011ZM.x	12,4W	8-32°	90	3000K	460Lm	38Lm/W

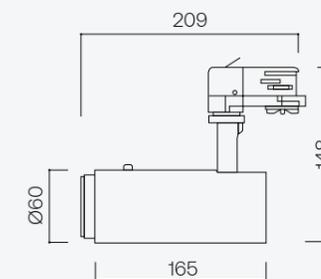

Hit Zoom XL



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB LUMINUS
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- PUSH ONLY
- DALI-2

Protection Protección

- IP20


Finishes Acabados

- Black
- White


Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P604.927025ZM.x	28,9W	9-42°	90	2700K	1500Lm	52Lm/W
P604.930025ZM.x	28,9W	9-42°	90	3000K	1500Lm	52Lm/W

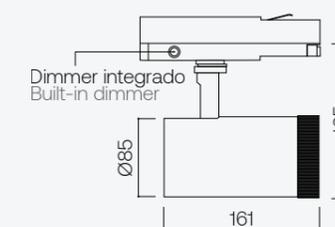

Gallery

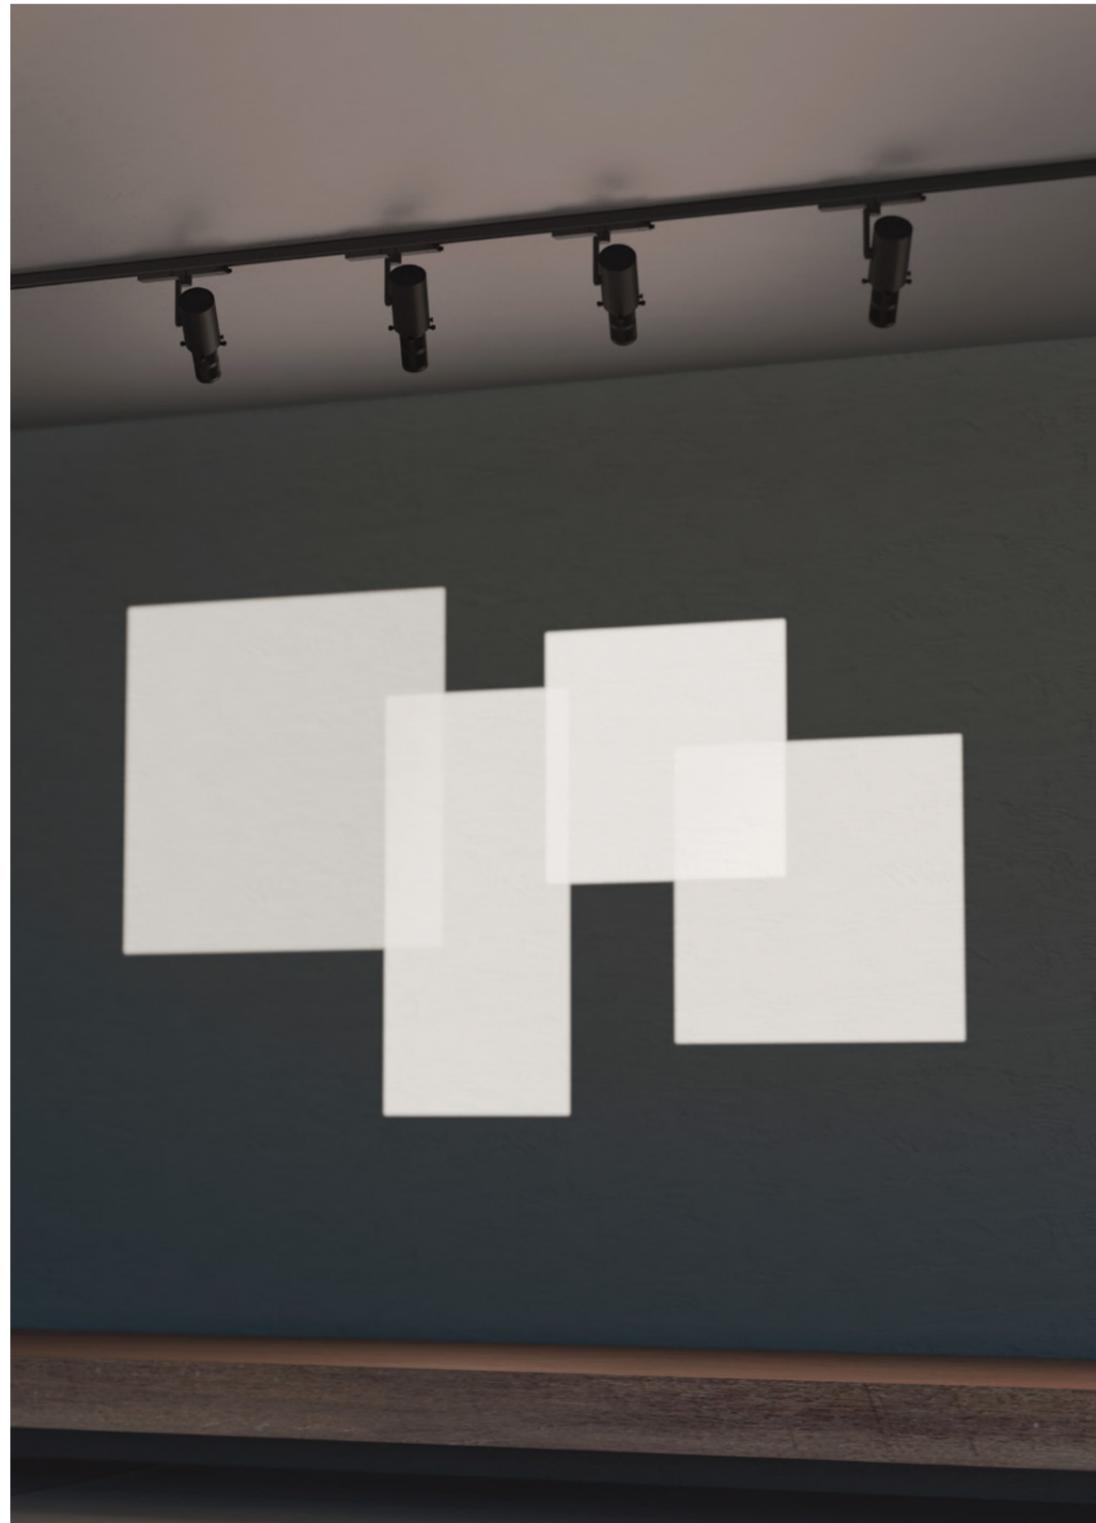

Gallery Nano Mag



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB CITIZEN
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 48VDC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20


Finishes Acabados

- Black


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P800.I27002ZM.x	2,8W	18-35°	95	2700K	37Lm	14Lm/W
P800.I30002ZM.x	2,8W	18-35°	95	3000K	40Lm	15Lm/W
P800.I40002ZM.x	2,8W	18-35°	95	4000K	42Lm	15Lm/W



Gallery Track



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB CITIZEN
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20


Finishes Acabados

- Black


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P801.I27012ZM.x	14,4W	20-35°	95	2700K	450Lm	32Lm/W
P801.I30012ZM.x	14,4W	20-35°	95	3000K	480Lm	34Lm/W
P801.I40012ZM.x	14,4W	20-35°	95	4000K	500Lm	35Lm/W

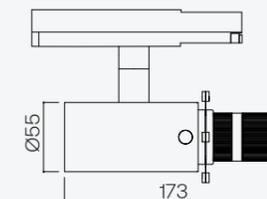

Gallery XL Track



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB CITIZEN
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20


Finishes Acabados

- Black


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P802.I27025ZM.x	28,9W	25-40°	95	2700K	1000Lm	35Lm/W
P802.I30025ZM.x	28,9W	25-40°	95	3000K	1060Lm	37Lm/W
P802.I40025ZM.x	28,9W	25-40°	95	4000K	1100Lm	39Lm/W

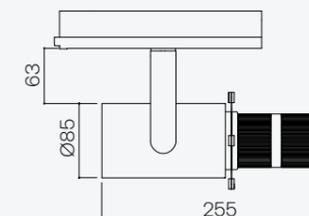

Gallery Nano In



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB CITIZEN
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20



Finishes Acabados

- Black


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P804.I27002ZM.x	2,8W	18-35°	95	2700K	37Lm	14Lm/W
P804.I30002ZM.x	2,8W	18-35°	95	3000K	40Lm	15Lm/W
P804.I40002ZM.x	2,8W	18-35°	95	4000K	42Lm	15Lm/W



Gallery In



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB CITIZEN
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP20


Finishes Acabados

- Black


Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
P803.I27012ZM.x	14,4W	20-35°	95	2700K	450Lm	32Lm/W
P803.I30012ZM.x	14,4W	20-35°	95	3000K	480Lm	34Lm/W
P803.I40012ZM.x	14,4W	20-35°	95	4000K	500Lm	35Lm/W

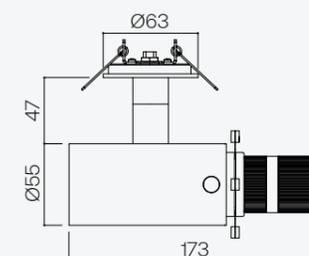

Kubbik

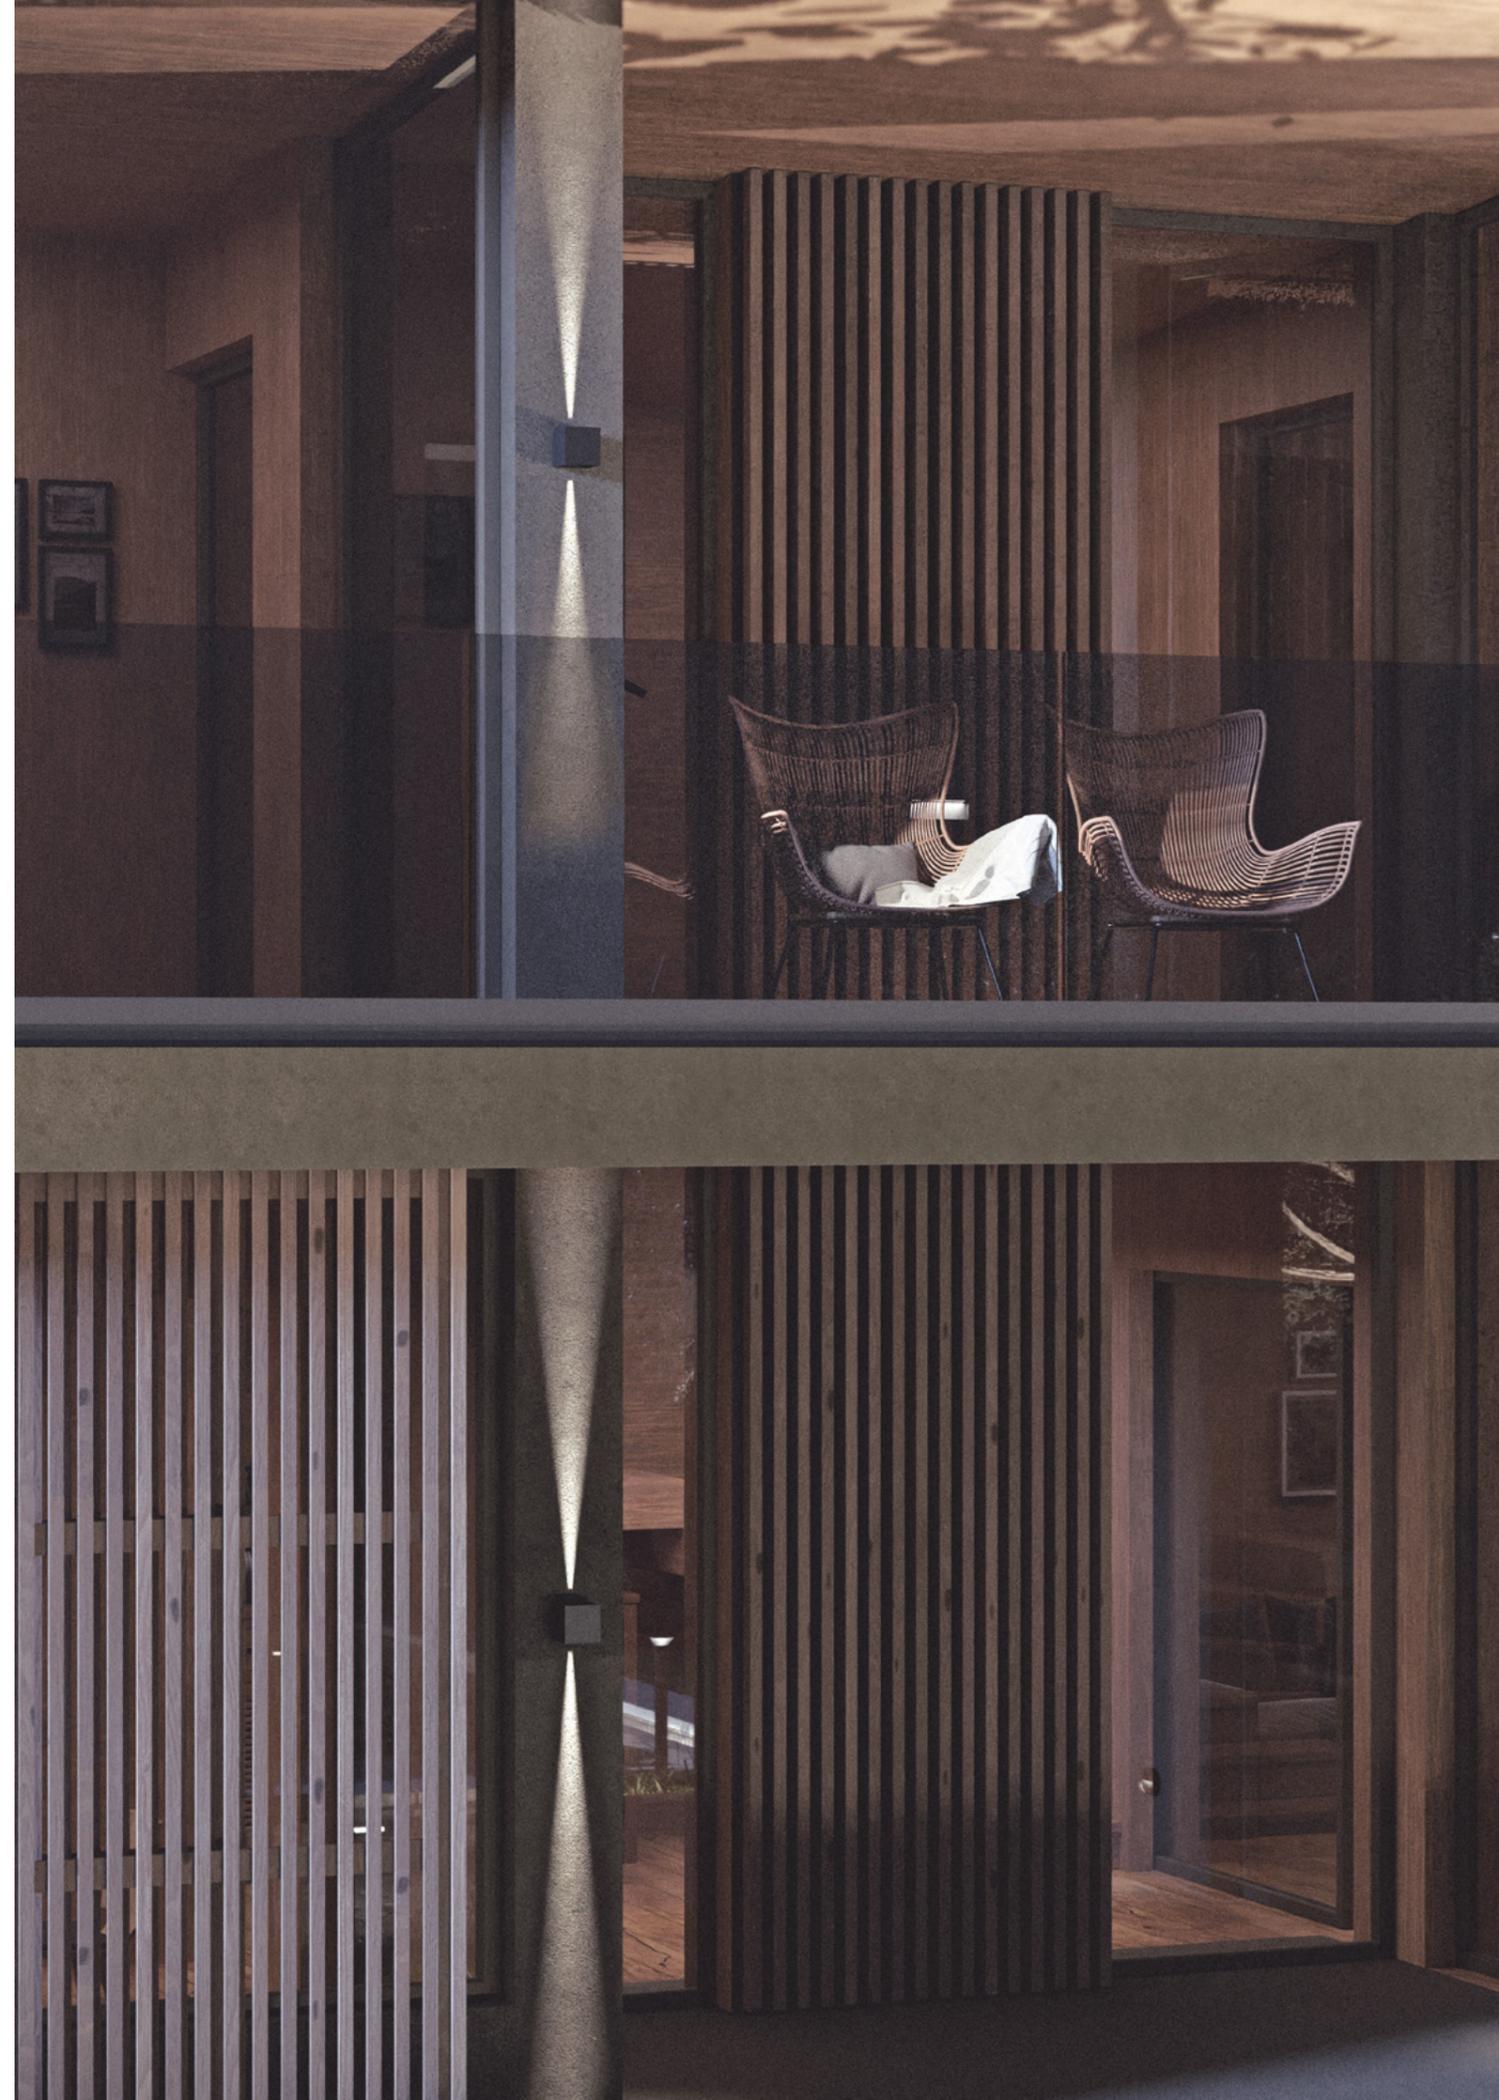

Kubbik

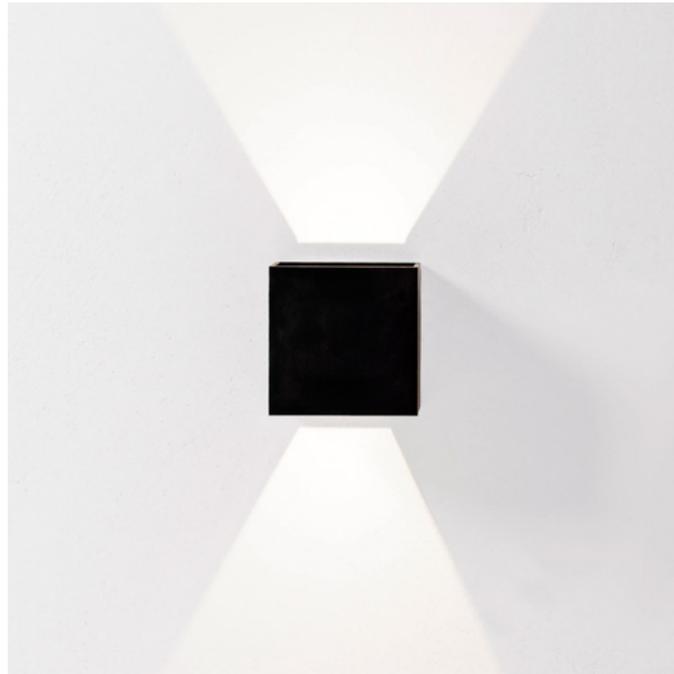

Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- HP LED CREE

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP65


Finishes Acabados

- Black
- White

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
X043.830006ZM.x	2x3,6W	0-120°	80	3000K	2x<270Lm	<75Lm/W

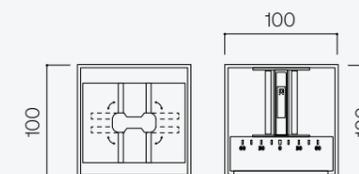

Rubbik



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- HP LED CREE

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP65


Finishes Acabados

- Black
- White



Downloads Descargas






Cod.	W	Beam angle	CRI	K	Lm	Efficiency
X044.830006ZM.x	2x3,6W	0-120°	80	3000K	2x<270Lm	<75Lm/W

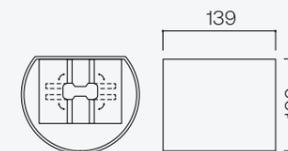

Lit

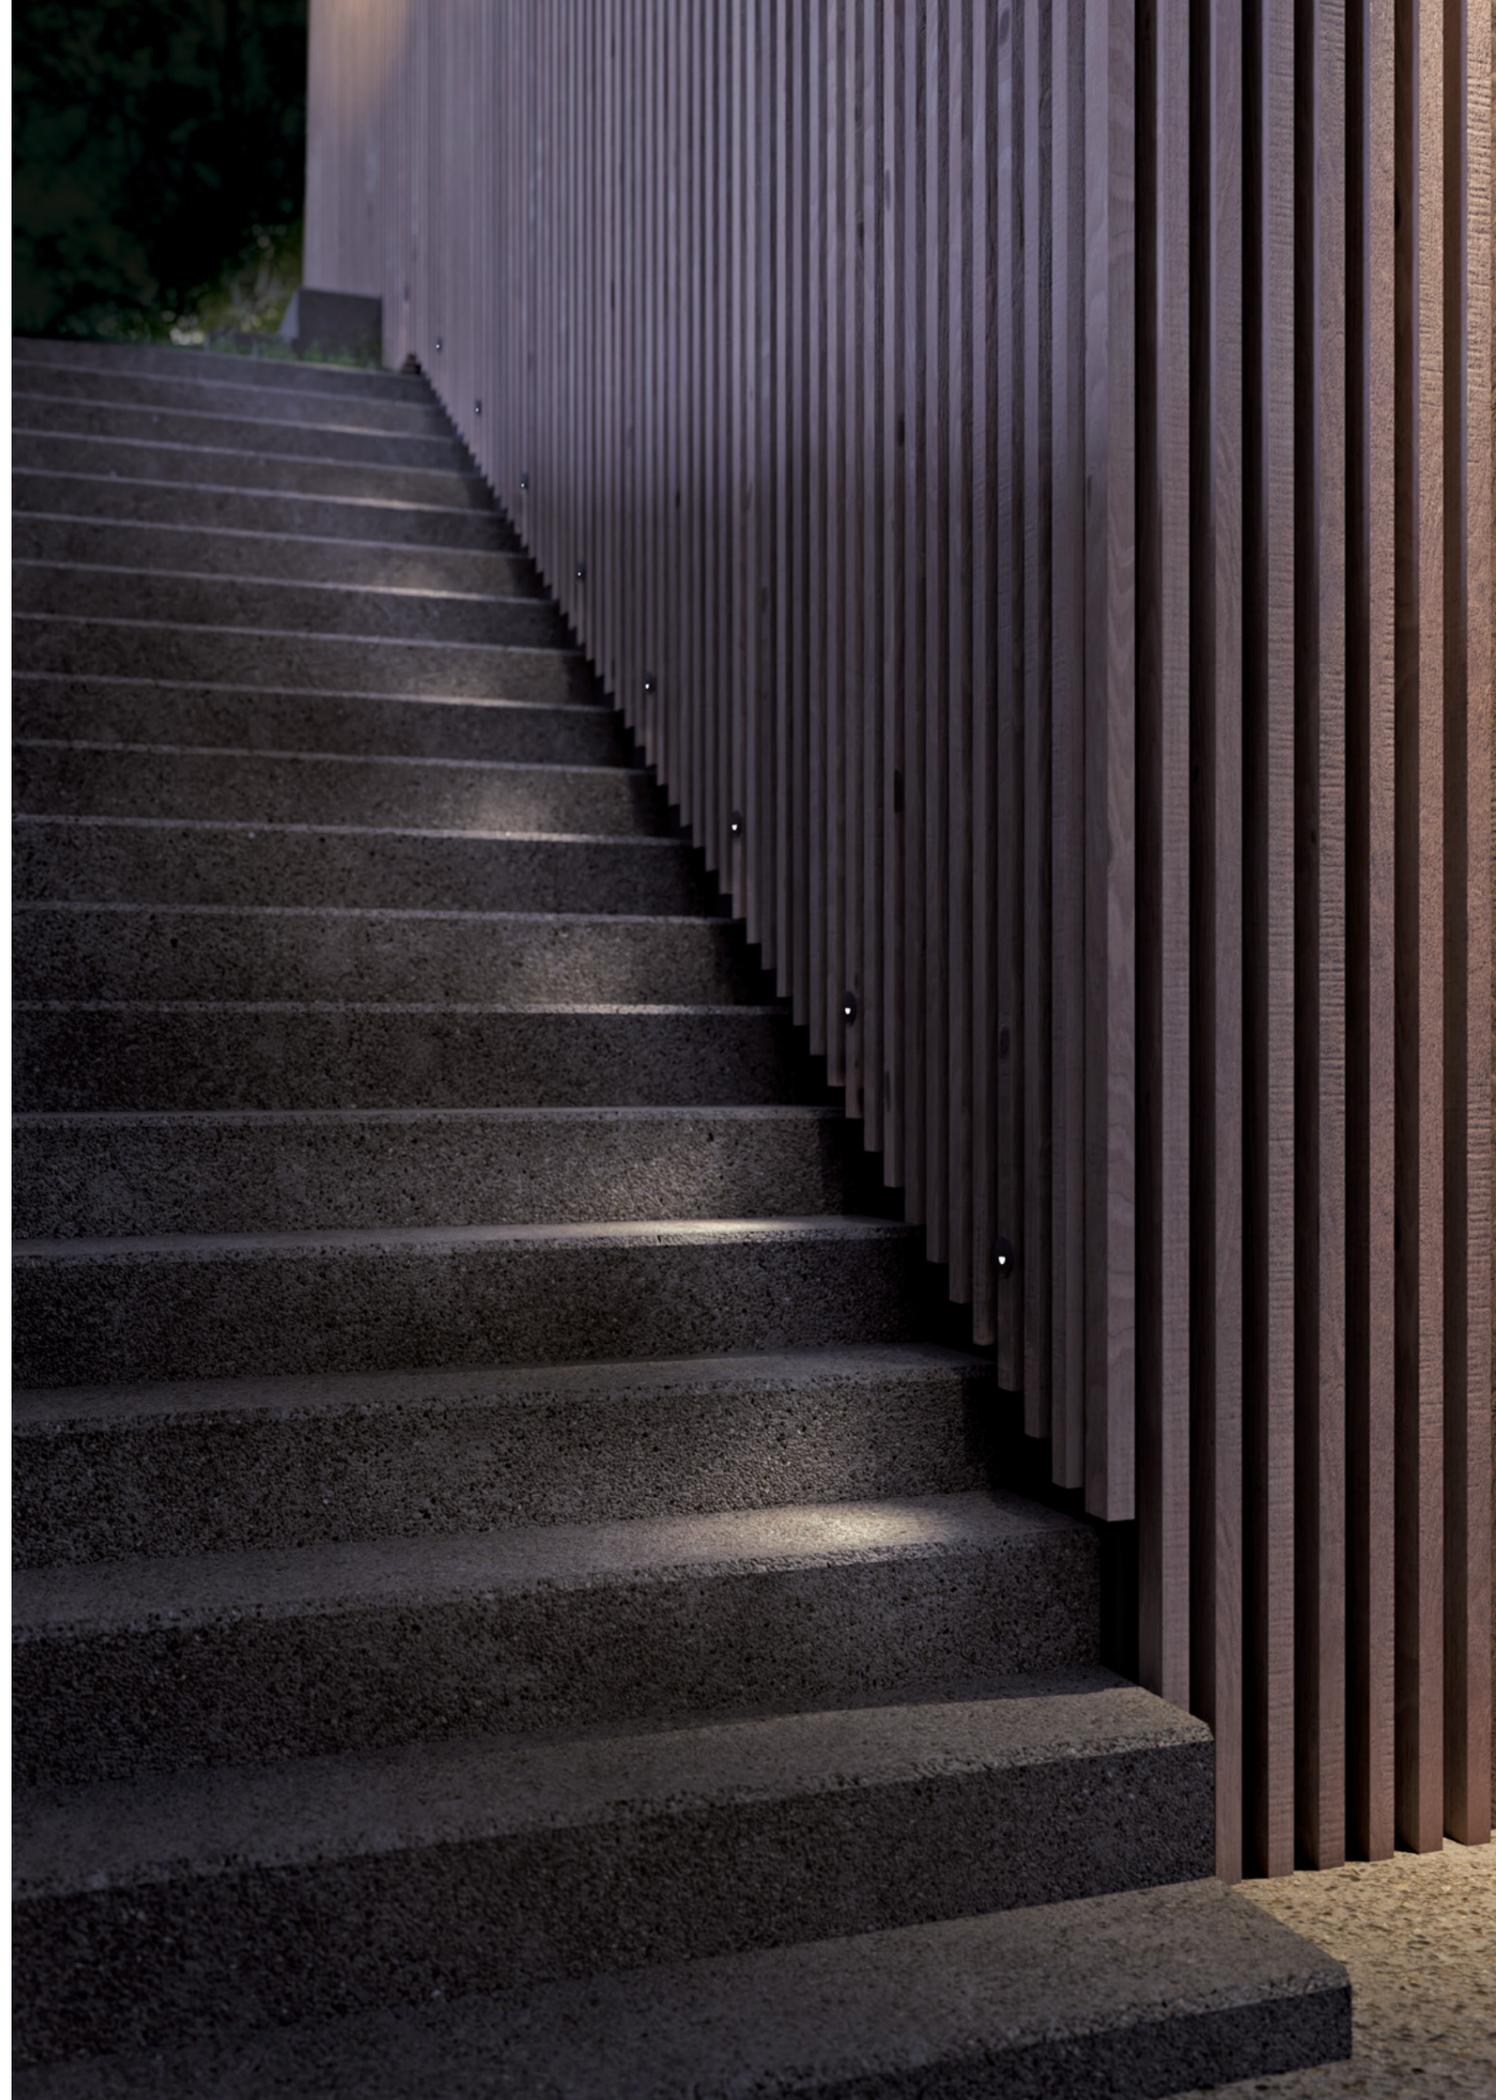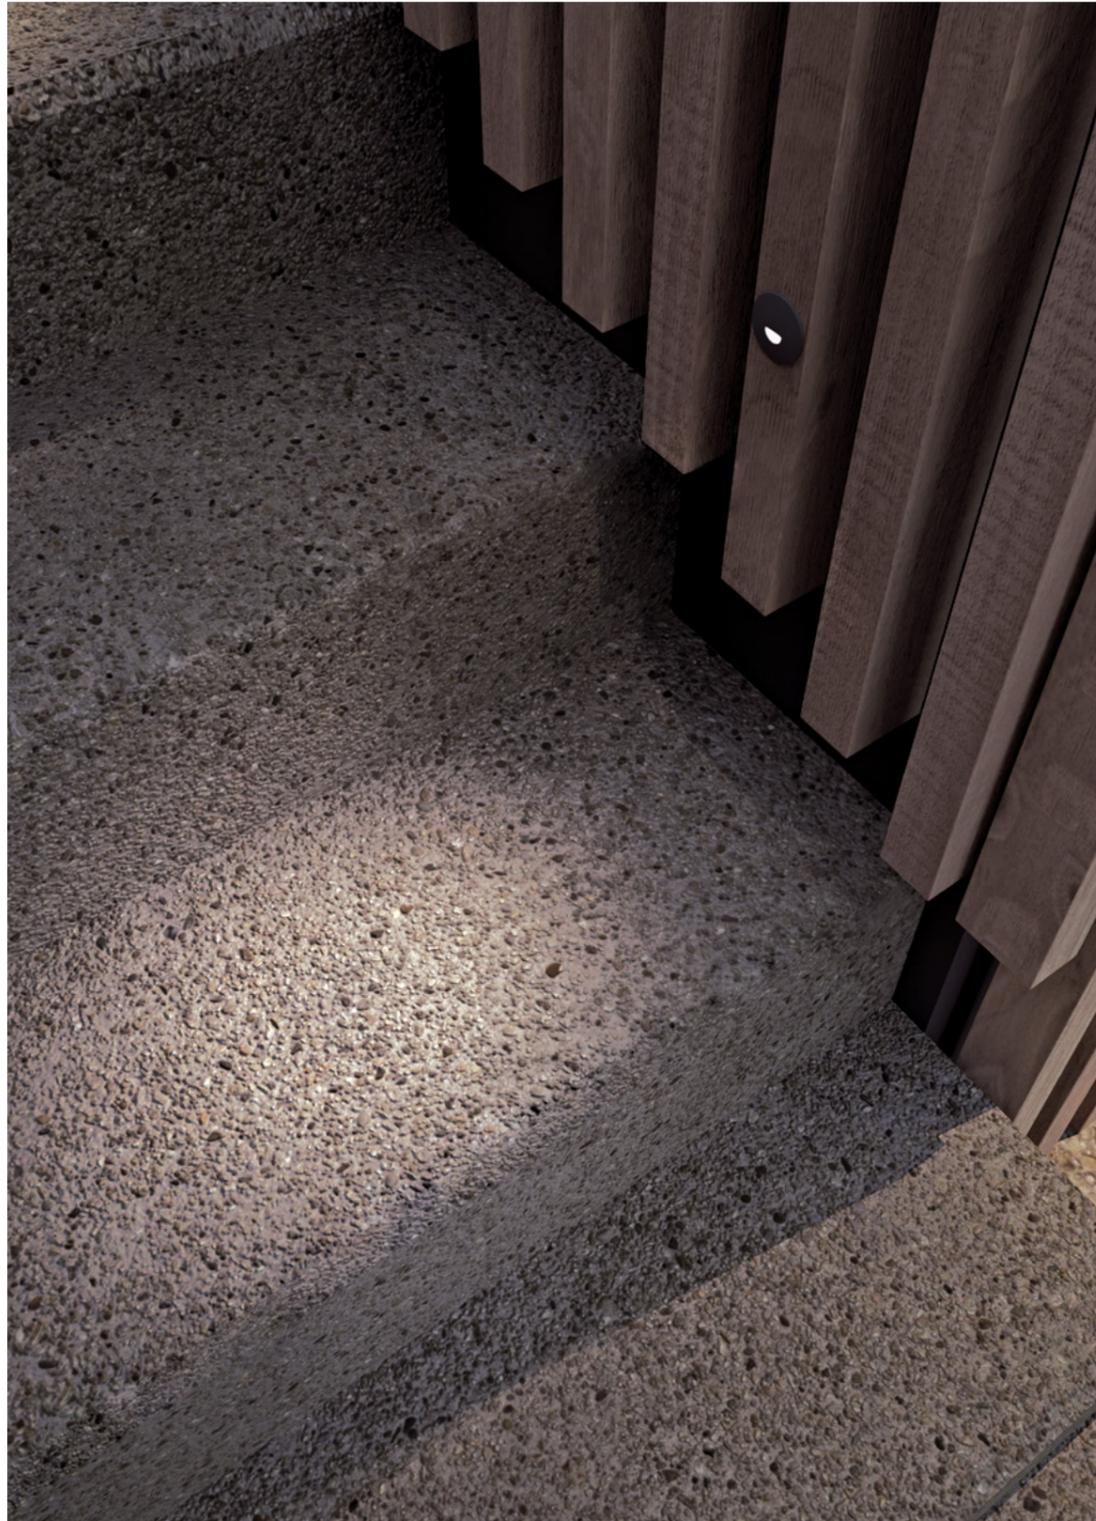

Lit Square

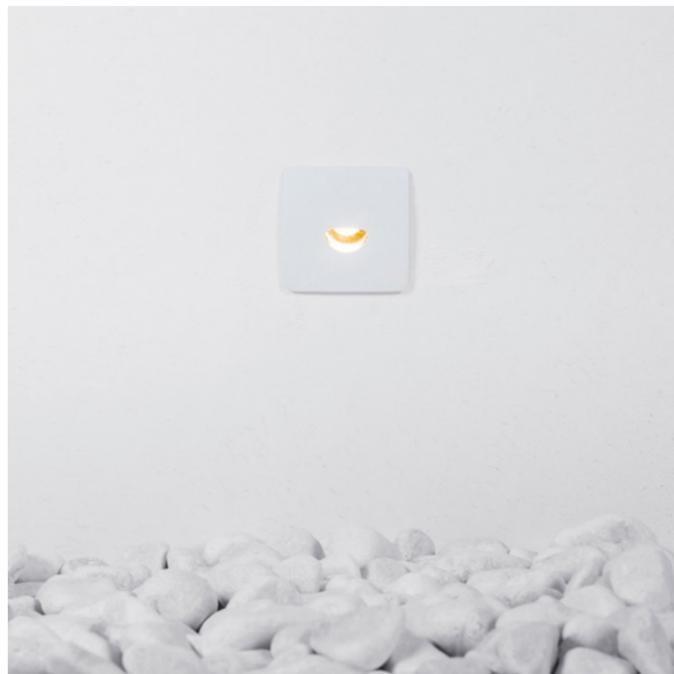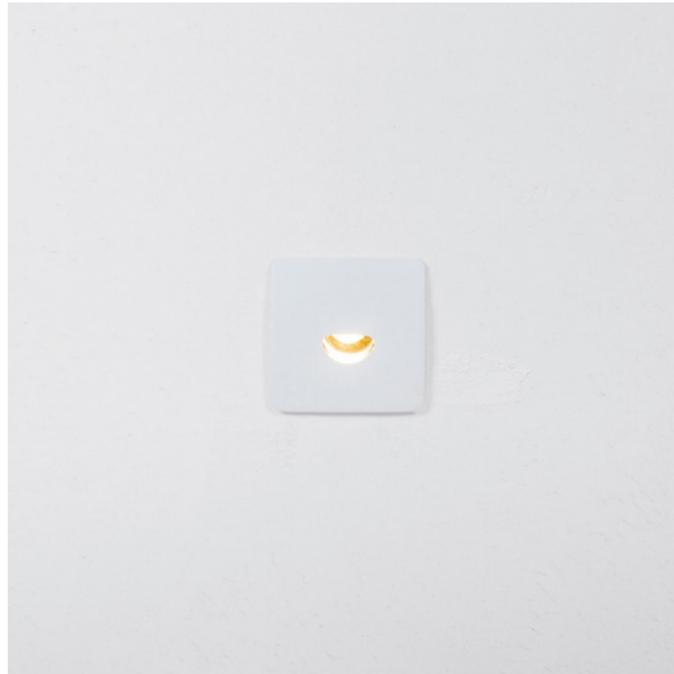

Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

Optic Óptica

- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP67


Finishes Acabados

- Black
- White


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
X026.83000200.x	2,4W	-	80	3000K	30Lm	13Lm/W

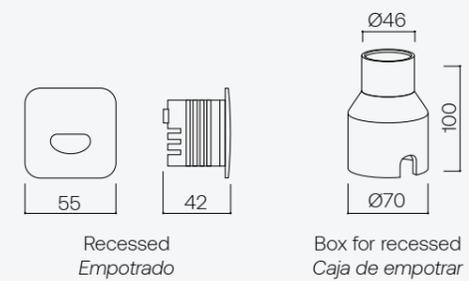

Lit Round

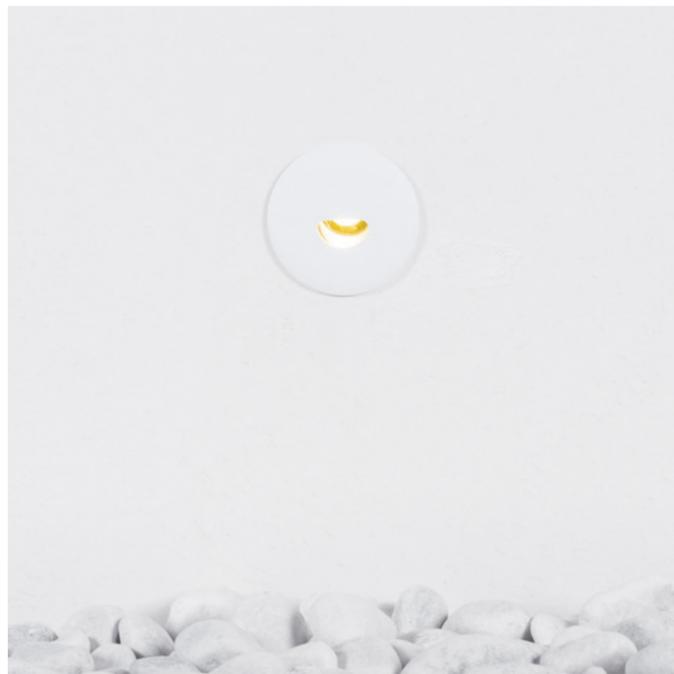

Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

Optic Óptica

- Lens

Driver

- Included - *Incluido*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP67


Finishes Acabados

- Black
- White

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
X028.83000200.x	2,4W	-	80	3000K	30Lm	13Lm/W



Recessed
Empotrado



Box for recessed
Caja de empotrar

Mila S



Mila S



Luminary

- Luminária
- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- Opal diffuser

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP65


Finishes Acabados

- Anthracite



Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
X050.83000355.x	4W	55°	80	3000K	175Lm	44Lm/W

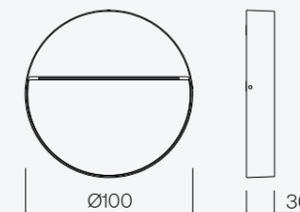

Mila M

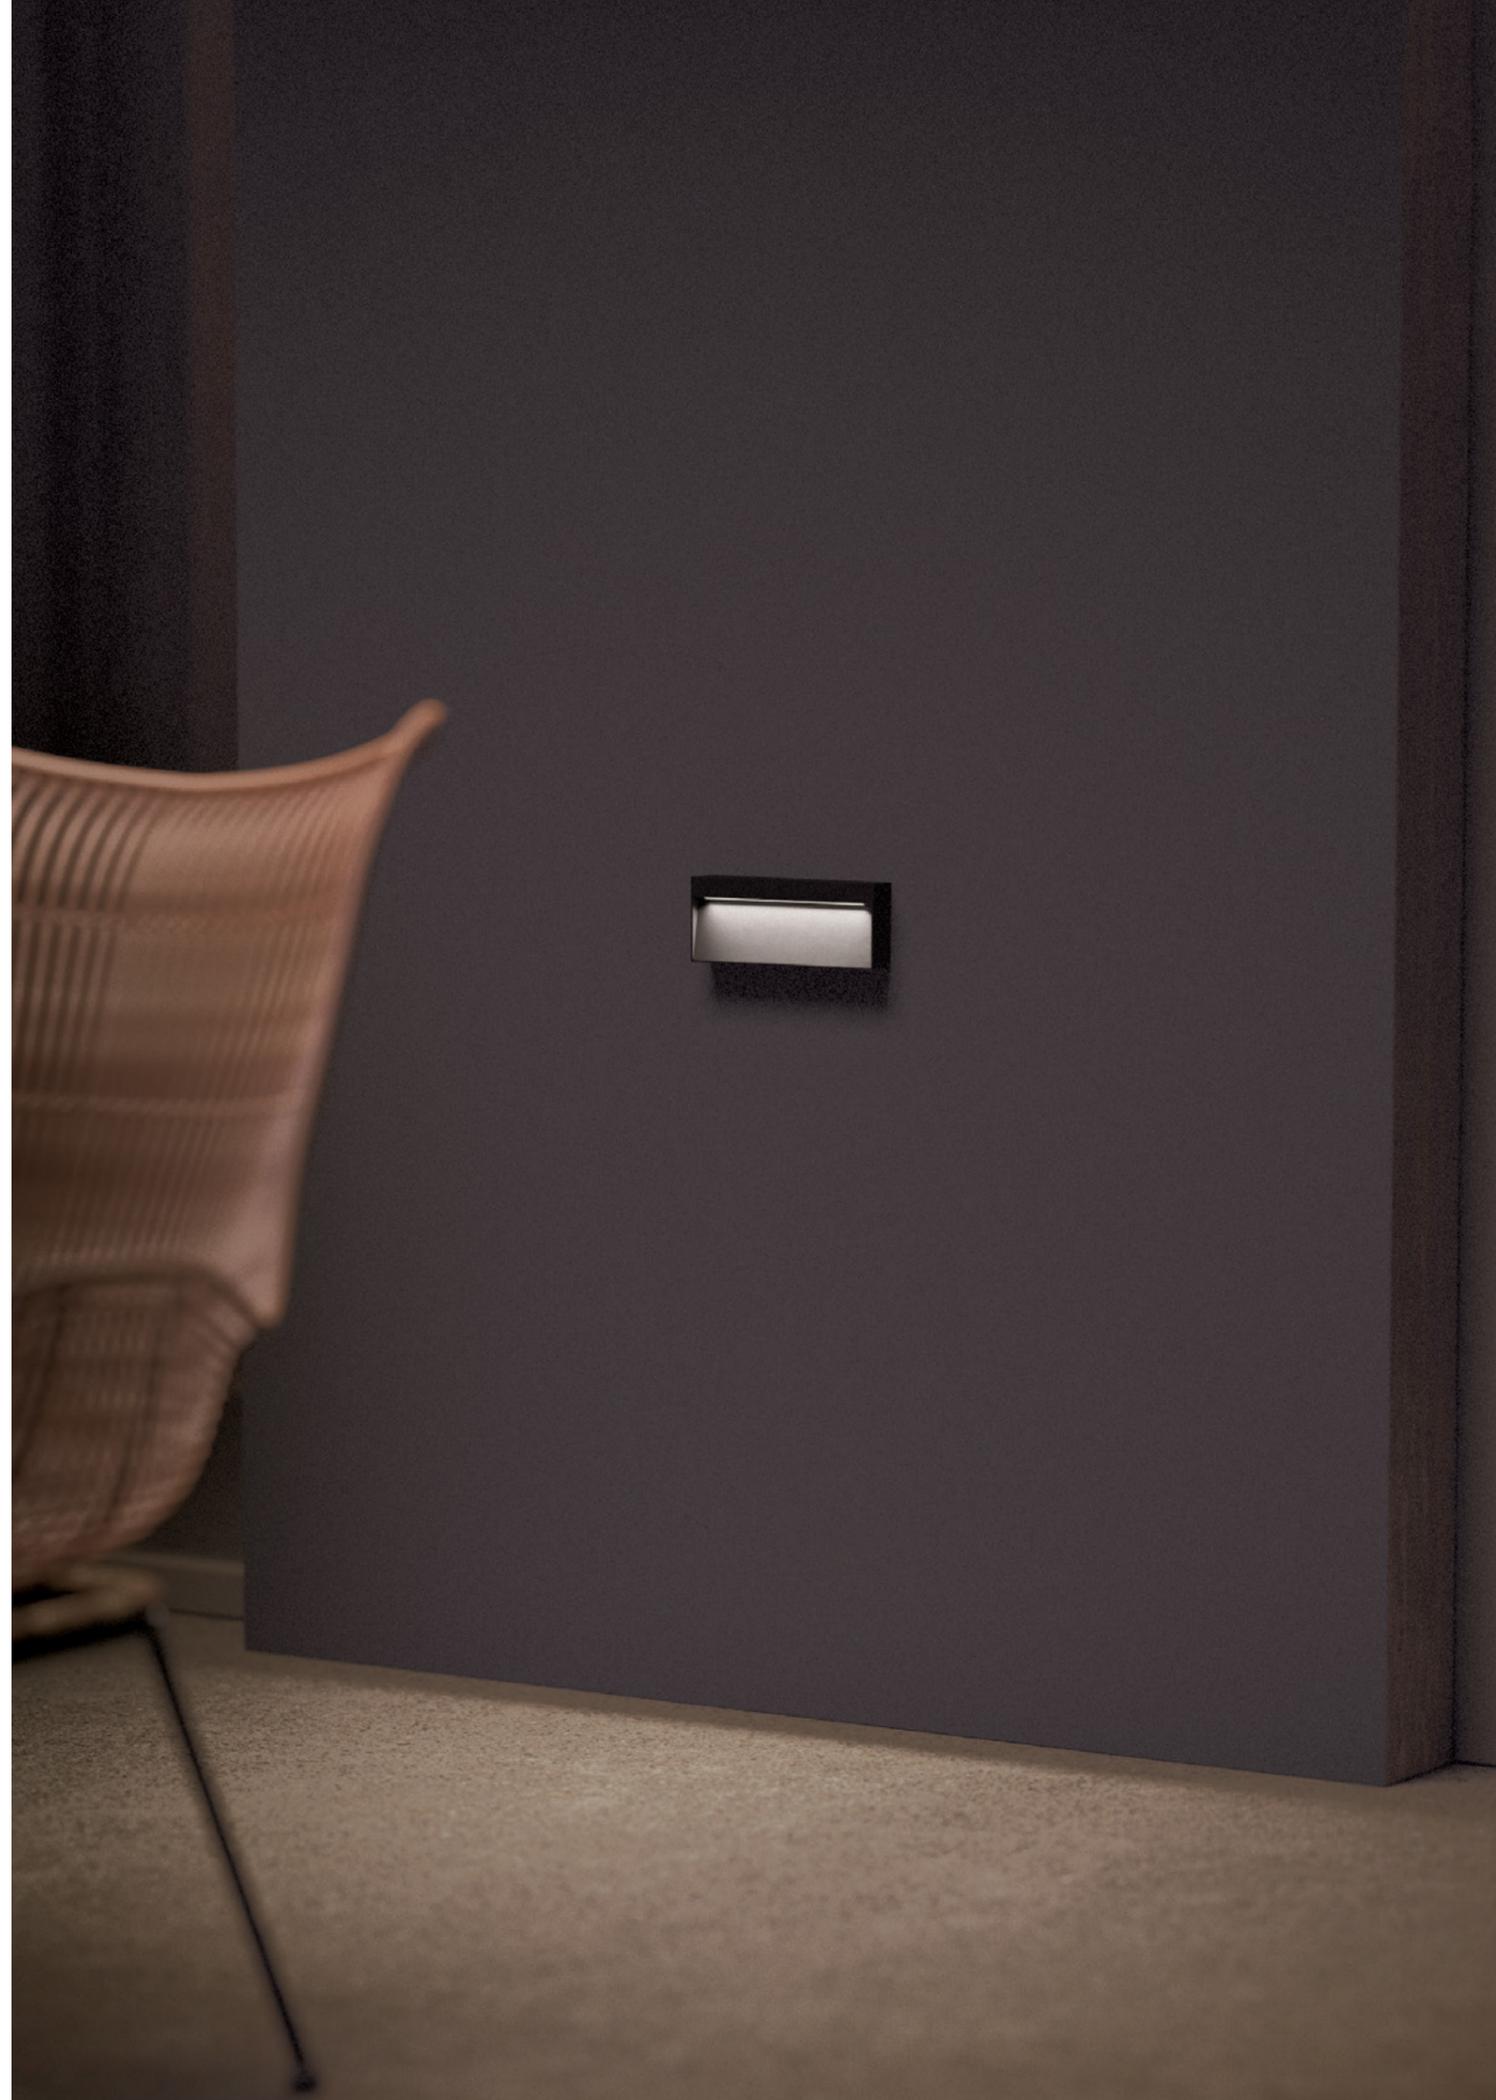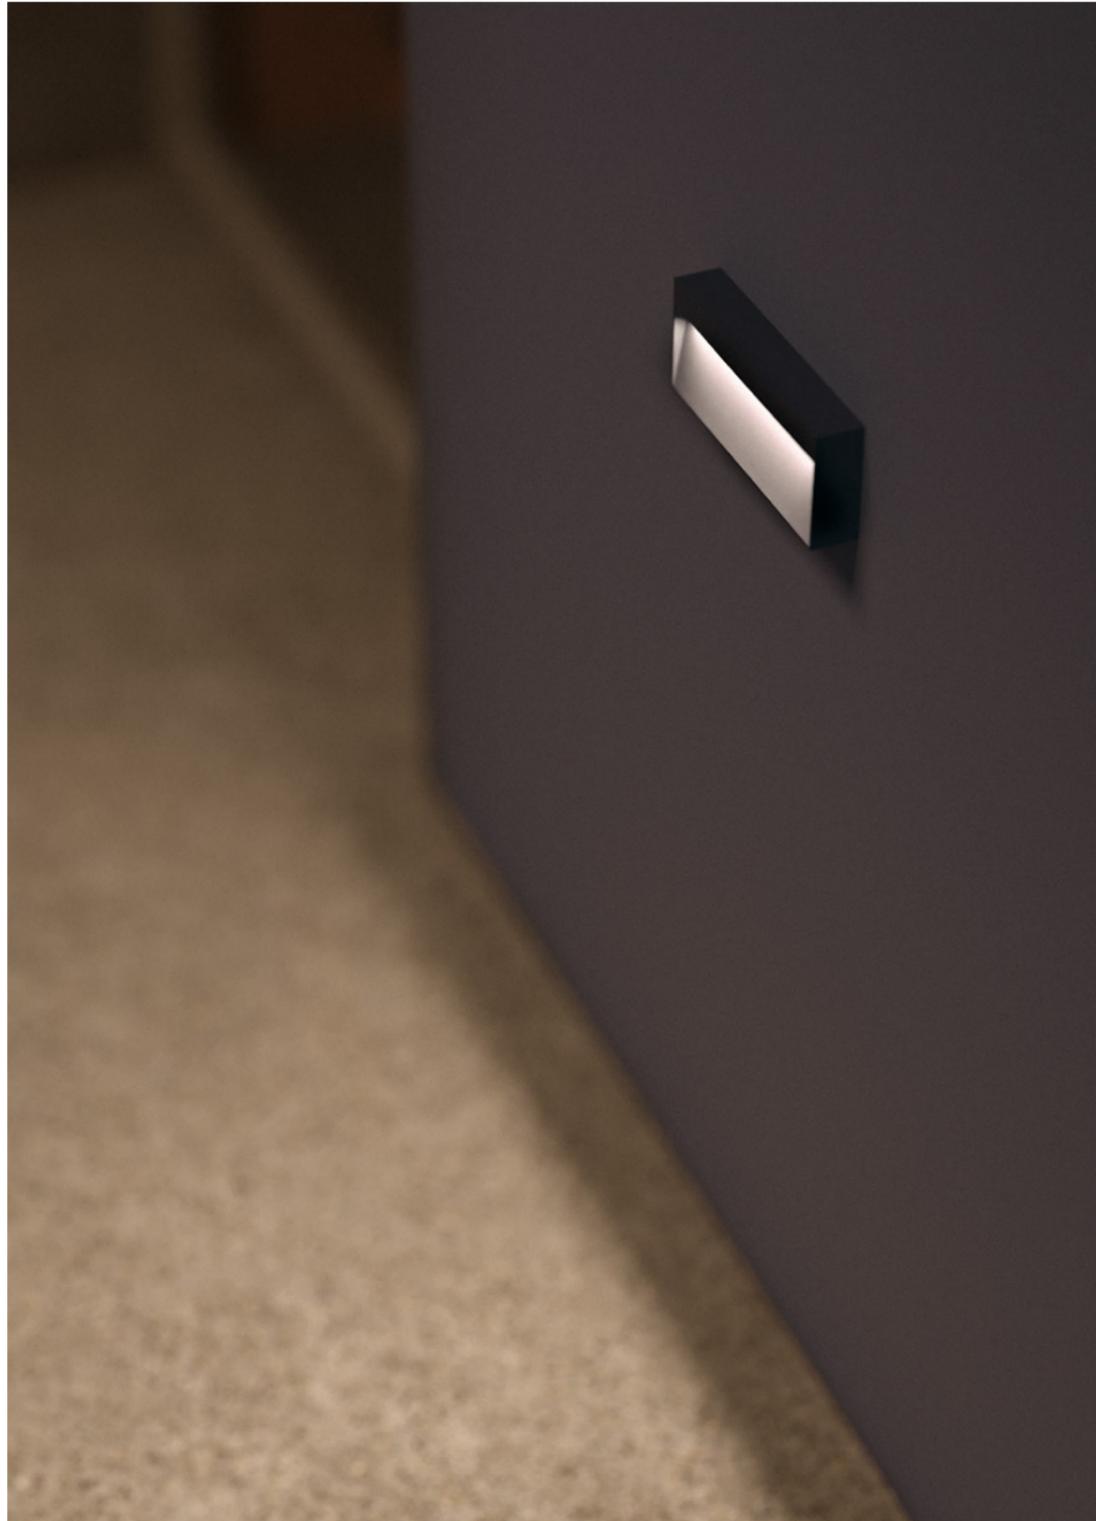

Mila M



180 — Outdoor

Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

Optic Óptica

- Opal diffuser

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP65


Finishes Acabados

- Anthracite

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
X051.83000665.x	7,6W	65°	80	3000K	260Lm	35Lm/W

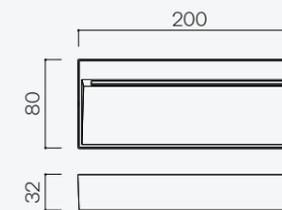

Snake



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

Optic Óptica

- Lens

Driver

- Not included - *No incluido*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP67

Finishes Acabados



- Black

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
SNK274067	36W	40°	90	2700k	1945Lm	54Lm/W
SNK304067	36W	40°	90	3000k	2280Lm	63Lm/W
SNK404067	36W	40°	90	4000k	2520Lm	70Lm/W


Accessory Accesorio

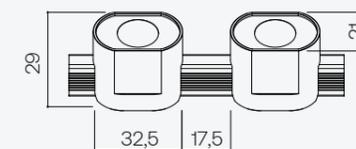


Tor



Tor

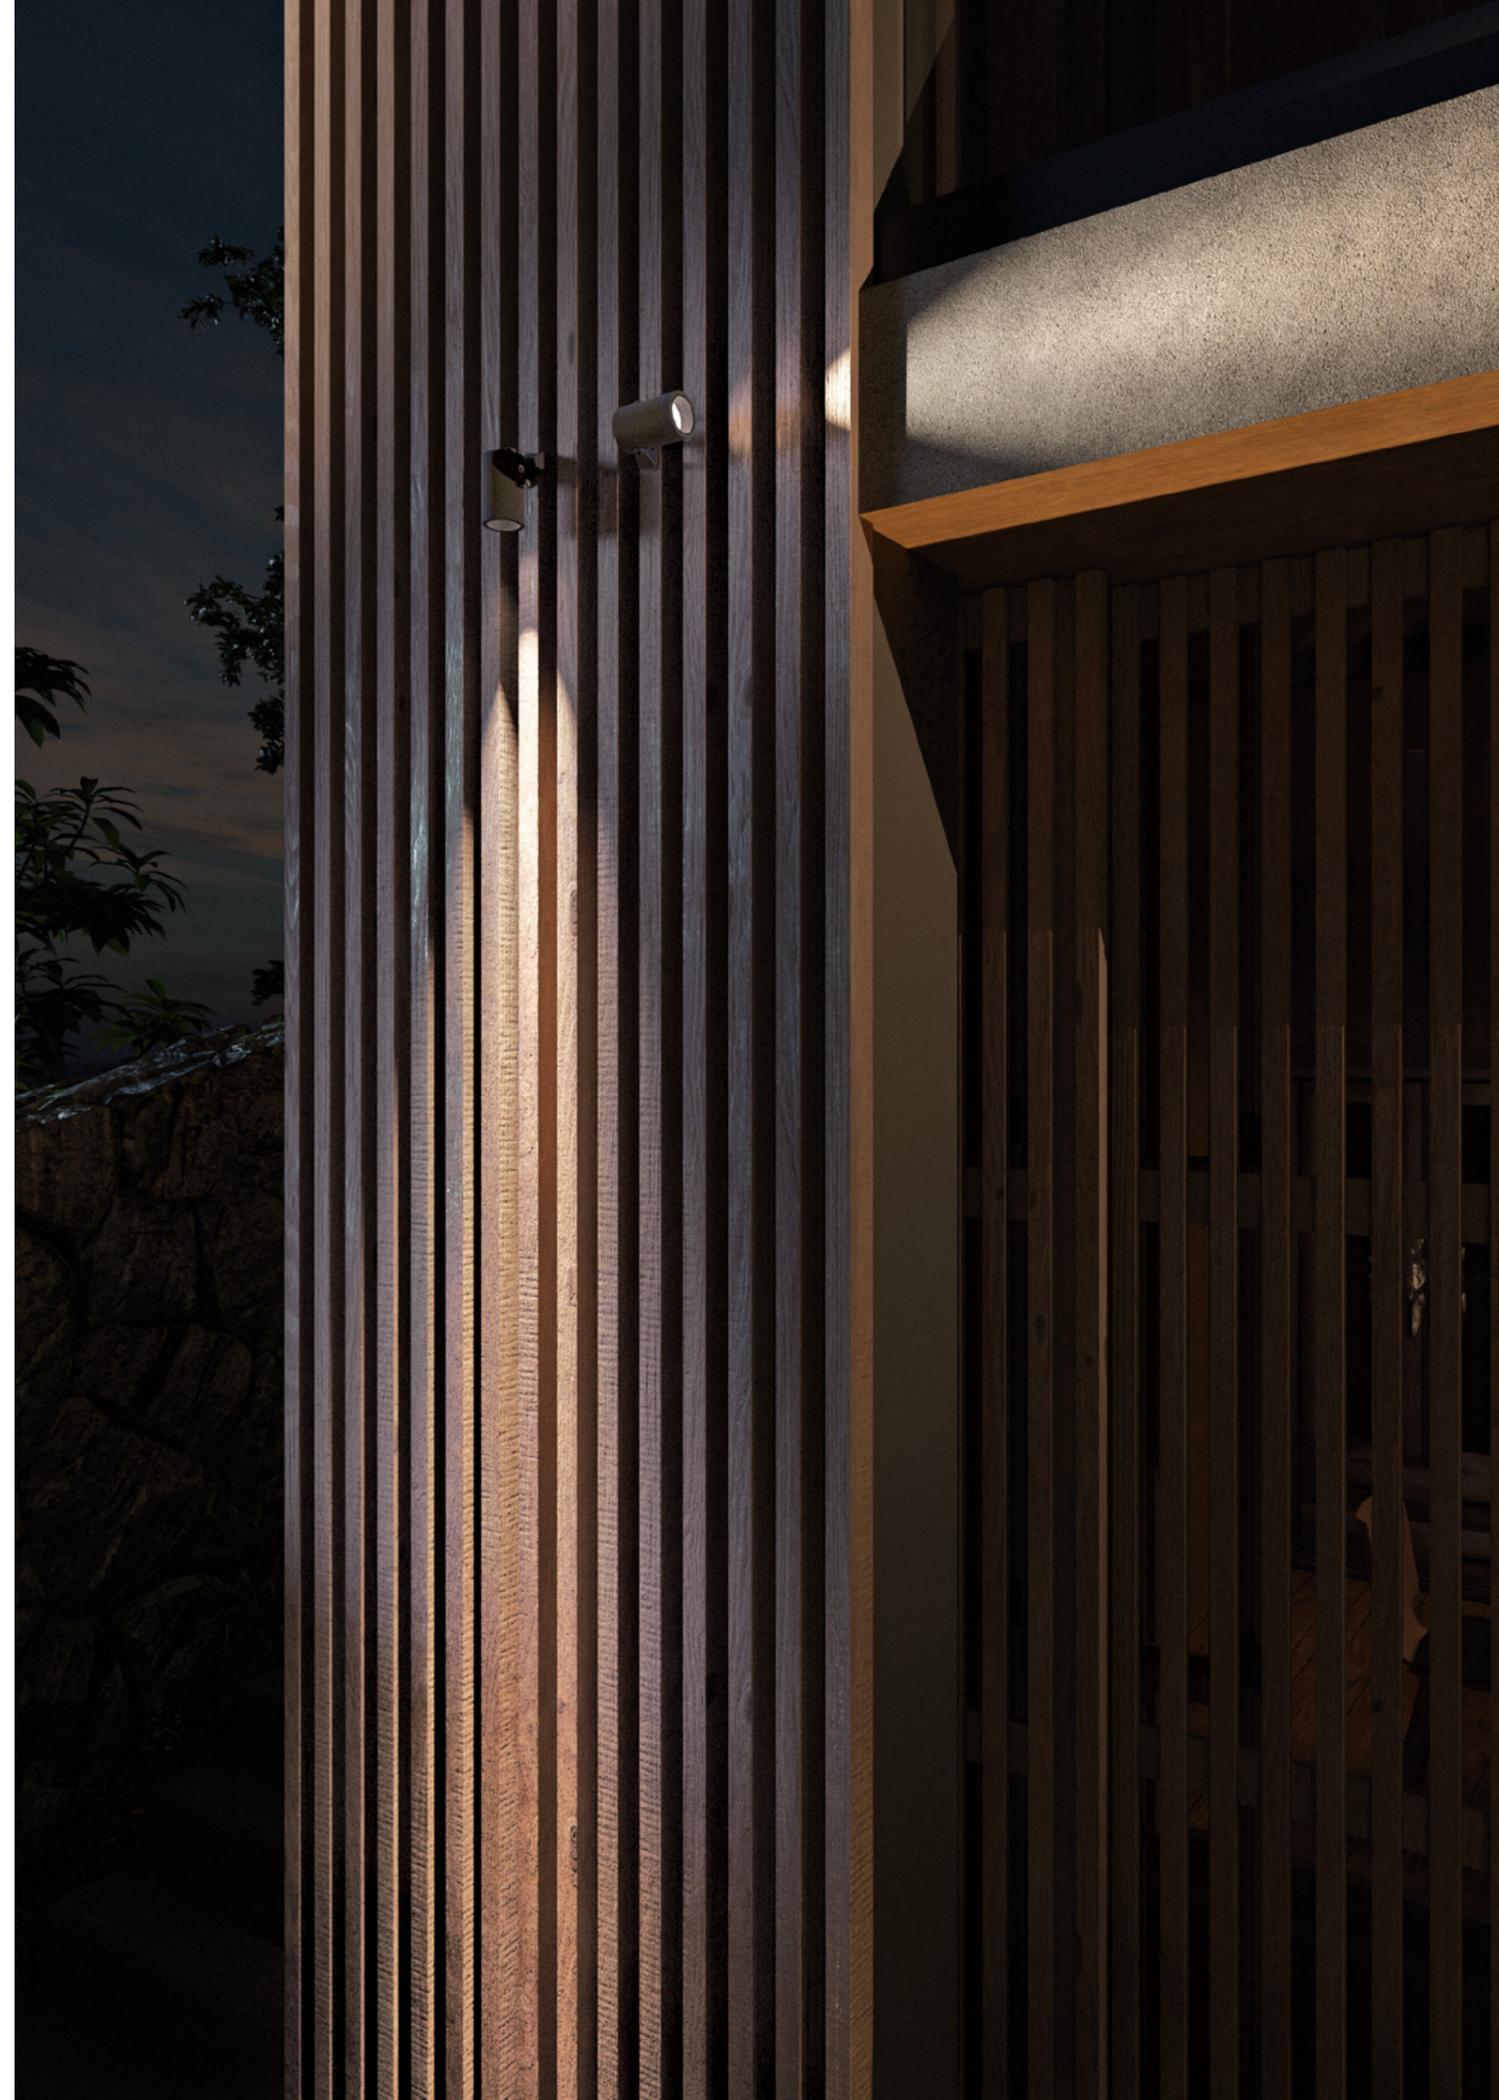

Tor S



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB BRIDGELUX
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC
- 24VDC (consult - *consultar*)

Dimming Regulación

- ON-OFF

Protection Protección


- IP65

Finishes Acabados

- Brown

Accessories Accesorios

- EX200
- Spike D43
- Piqueta D43



- EX204

Visor
Visera




Downloads Descargas




IP68 blocker



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
X110.827003HA.x	3,5W	HC15°	80	2700K	140Lm	40Lm/W
X110.827003HC.x	3,5W	HC36°	80	2700K	140Lm	40Lm/W
X110.830003HA.x	3,5W	HC15°	80	3000K	145Lm	42Lm/W
X110.830003HC.x	3,5W	HC36°	80	3000K	145Lm	42Lm/W

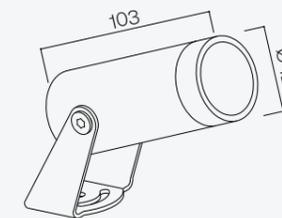

Tor M



Luminary

Luminária

- L70 > 50000h
- MacAdam 3

LED/Optic Óptica

- COB BRIDGELUX
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC
- 24VDC (consult - *consultar*)

Dimming Regulación

- ON-OFF

Protection Protección


- IP65

Finishes Acabados

- Brown

Accessories Accesorios

- EX202
Preinstallation box
Caja de preinstalación
- EX200
Spike D43
Piqueta D43



- EX205

Visor
Visera




Downloads Descargas




IP68 blocker



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
X111.827006HA.x	7W	HC15°	80	2700K	345Lm	50Lm/W
X111.827006HC.x	7W	HC36°	80	2700K	345Lm	50Lm/W
X111.830006HA.x	7W	HC15°	80	3000K	365Lm	53Lm/W
X111.830006HC.x	7W	HC36°	80	3000K	365Lm	53Lm/W

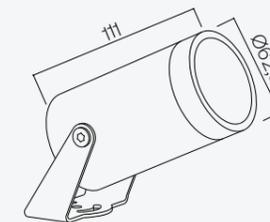

Tor L



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB BRIDGELUX
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC
- 24VDC (consult - *consultar*)

Dimming Regulación

- ON-OFF

Protection Protección


- IP65

Finishes Acabados

- Brown

Accessories Accesorios

- EX203
Preinstallation box
Caja de preinstalación
- EX201
Spike D55
Piqueta D55



- EX206
Visor
Visera




Downloads Descargas





IP68 blocker






Cod.	W	Beam angle	CRI	K	Lm	Efficiency
X112.827013HA.x	15,5W	HC15°	80	2700K	905Lm	59Lm/W
X112.827013HC.x	15,5W	HC36°	80	2700K	905Lm	59Lm/W
X112.830013HA.x	15,5W	HC15°	80	3000K	960Lm	62Lm/W
X112.830013HC.x	15,5W	HC36°	80	3000K	960Lm	62Lm/W

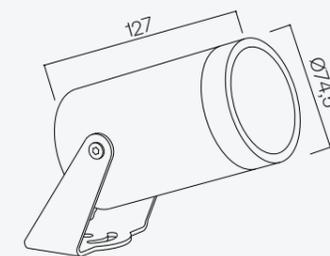

Wet

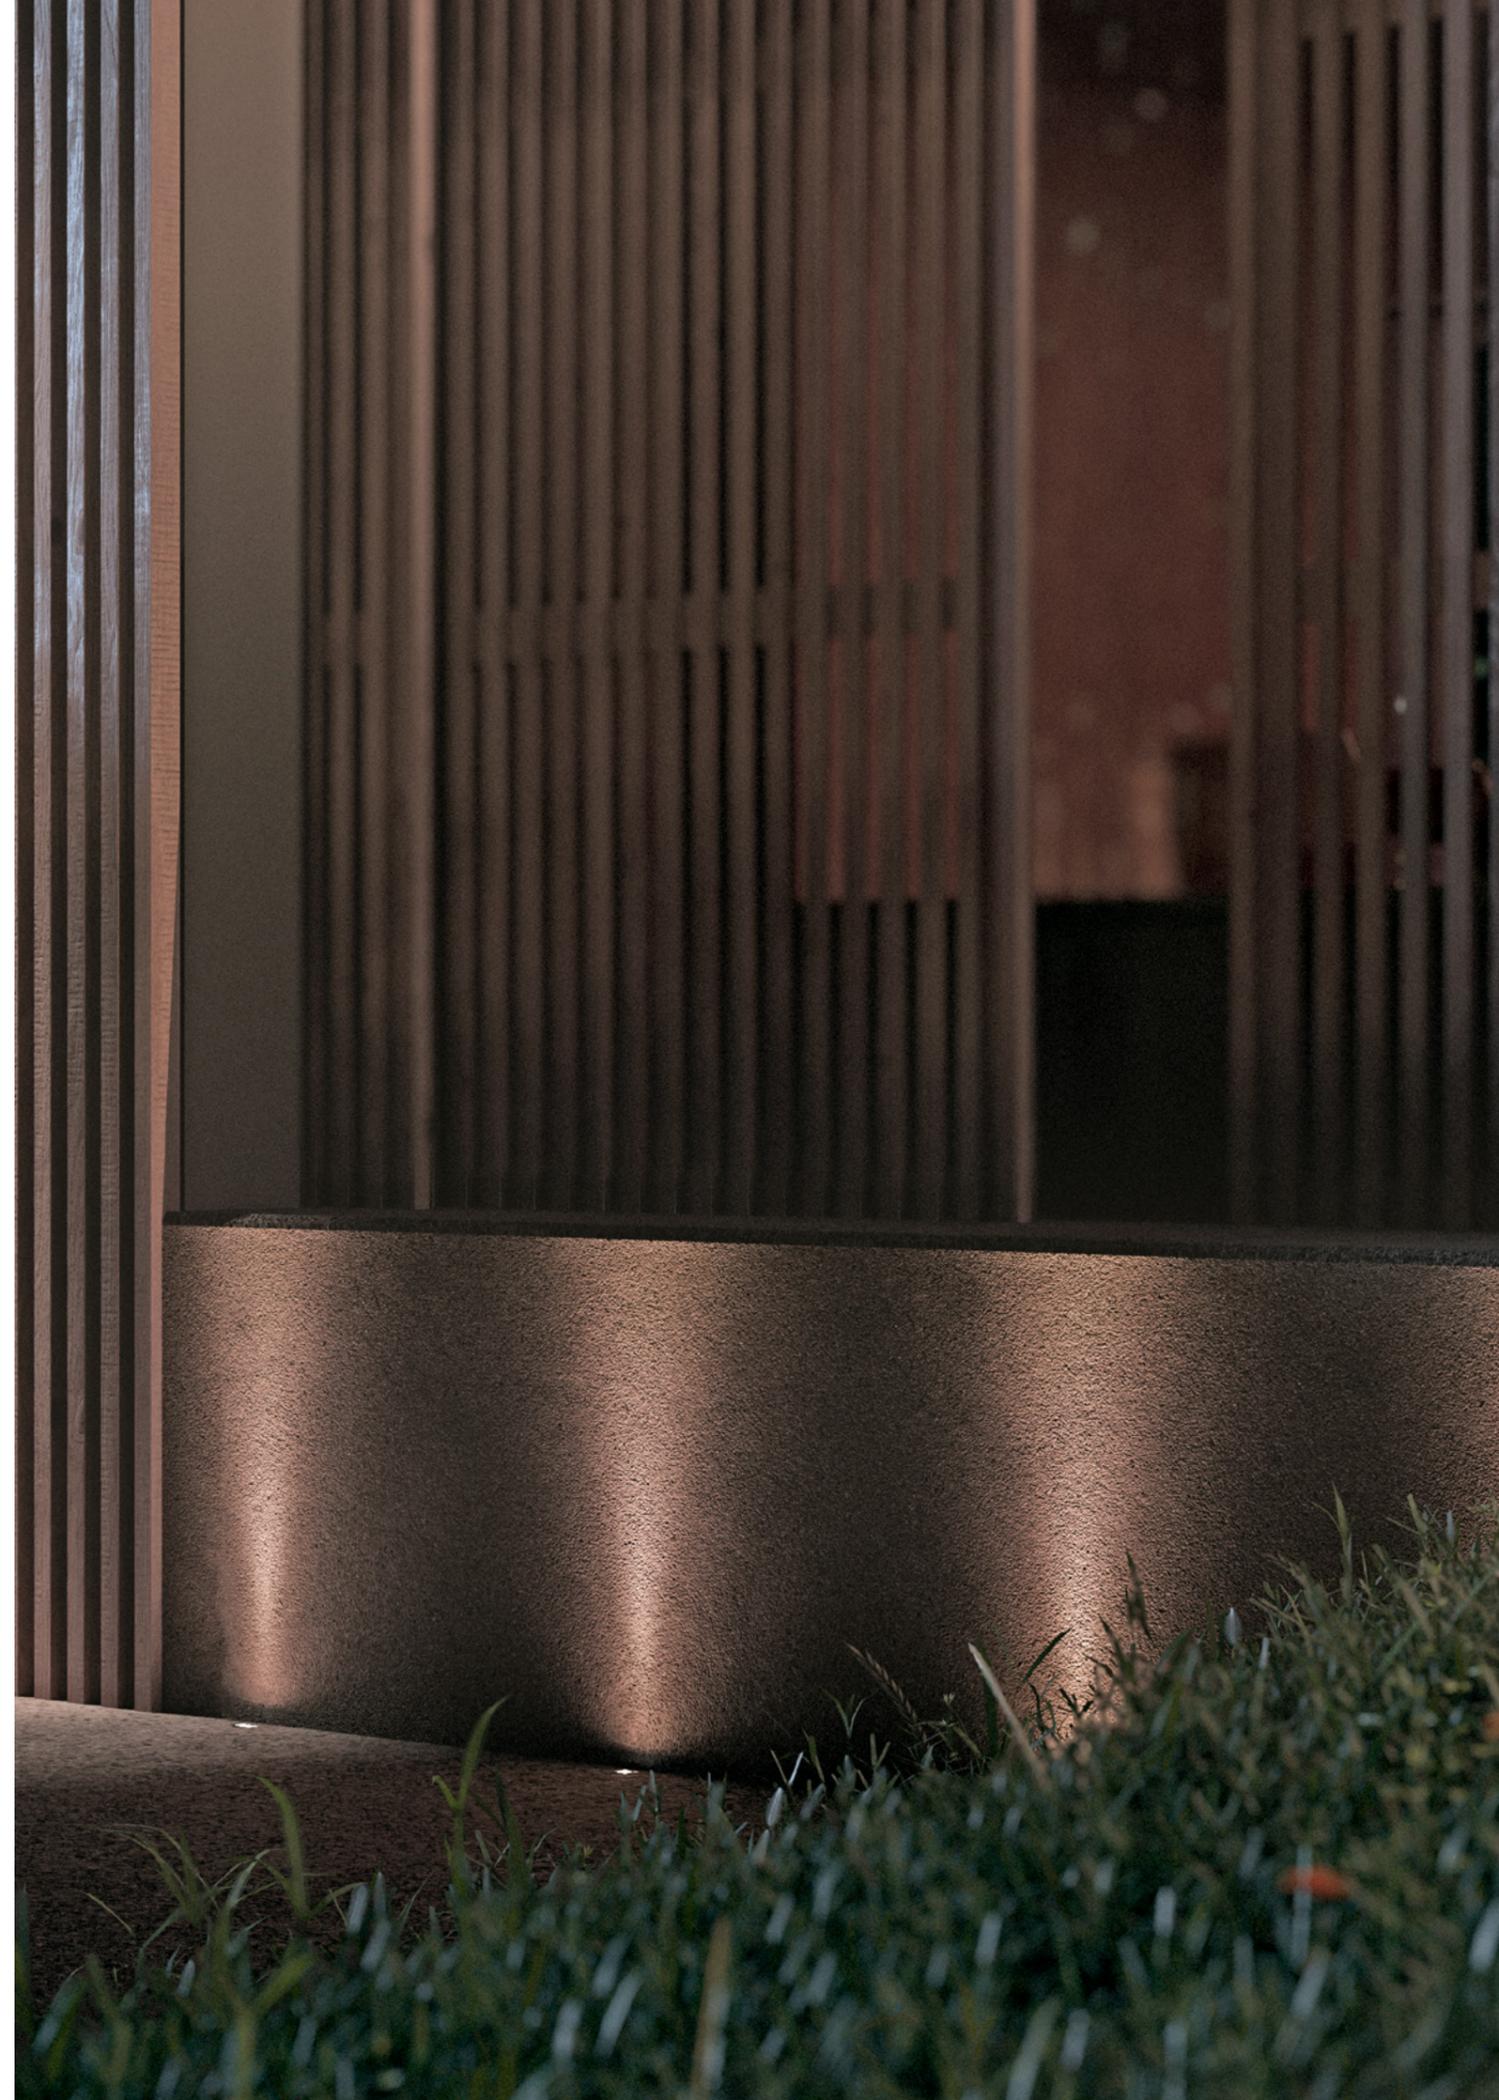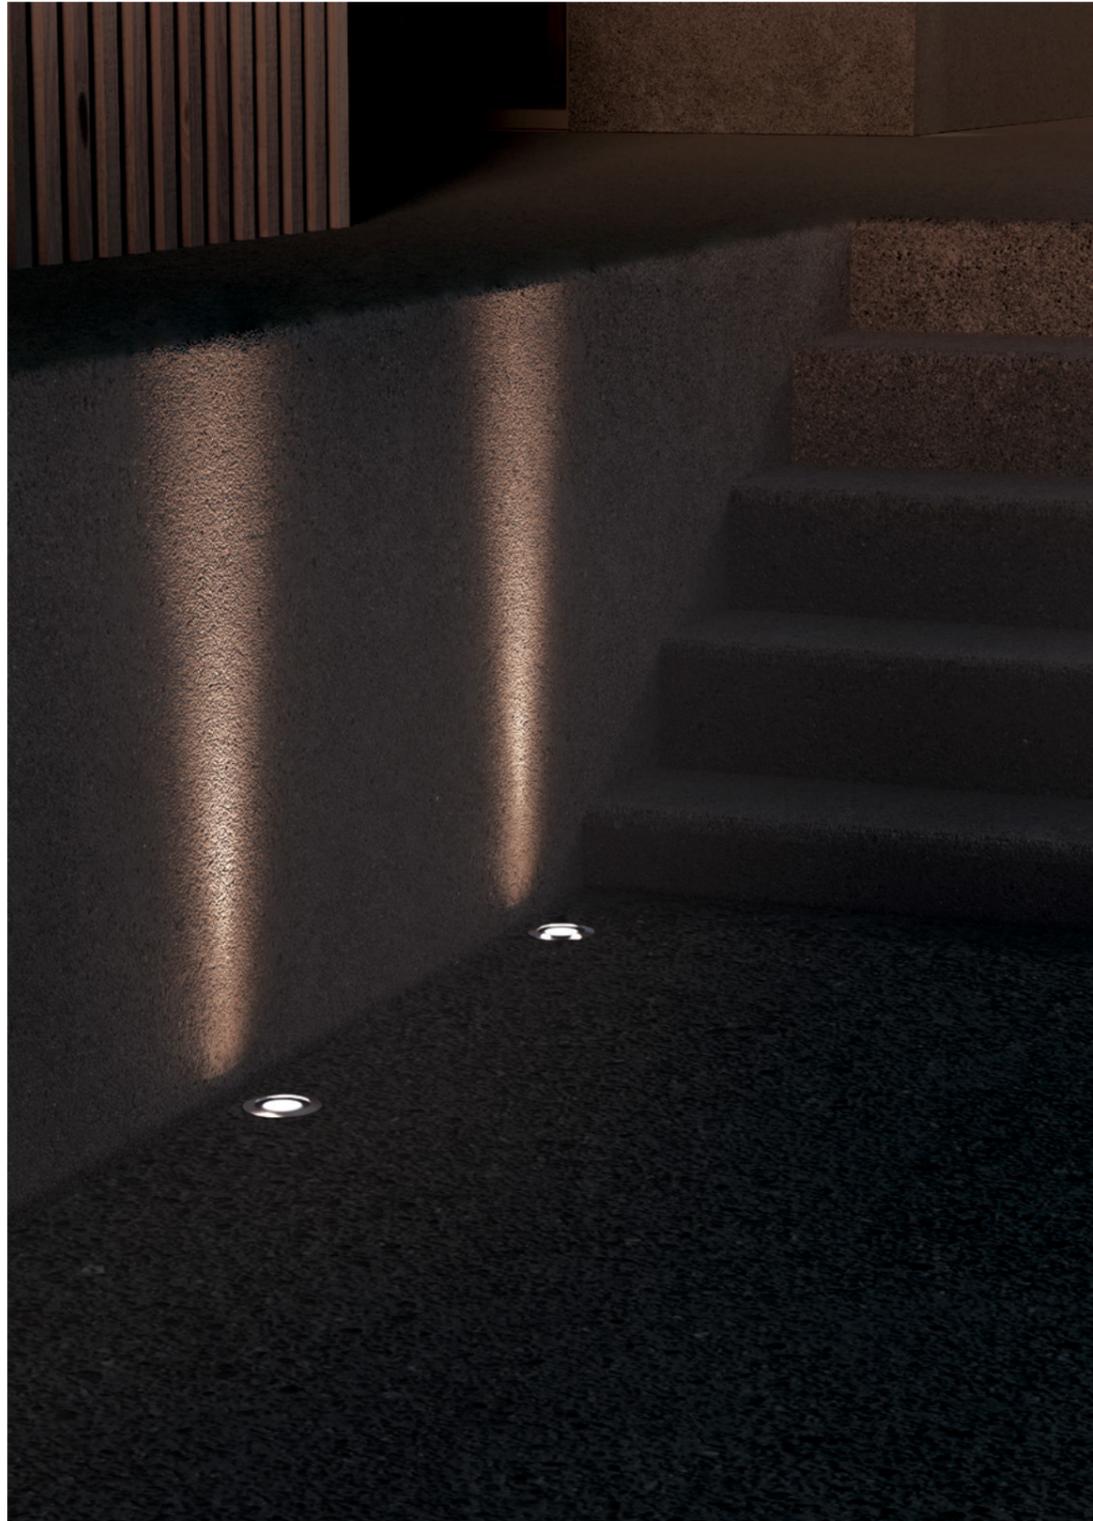

Wet XS

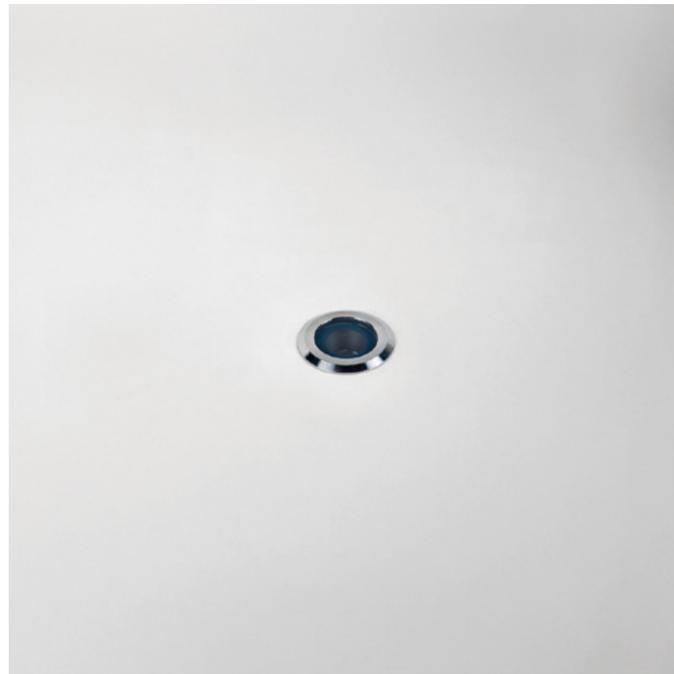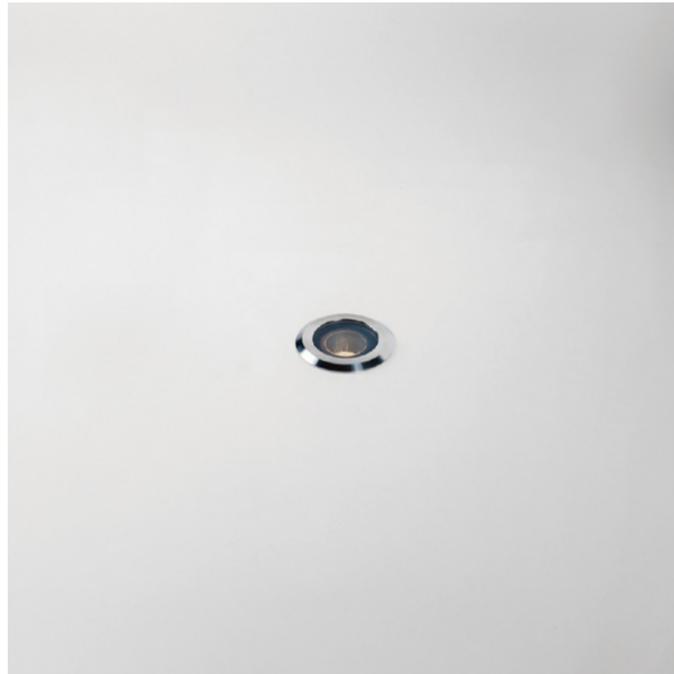

Luminary

- Luminária
- L70 > 50000h
- MacAdam 3

Optic Óptica

- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF

Protection Protección

- IP68

Finishes Acabados

- Inox 316

Accessories Accesorios


- EX046
Preinstallation box
Caja de preinstalación

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
X045.83000110.x	1,3W	10°	80	3000K	100Lm	77Lm/W

IP68 blocker


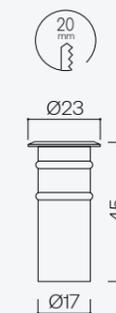


Recessed
Empotrado

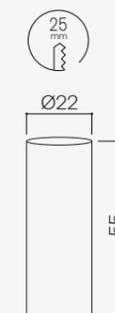

Box for recessed
Caja de empotrar

Wet S

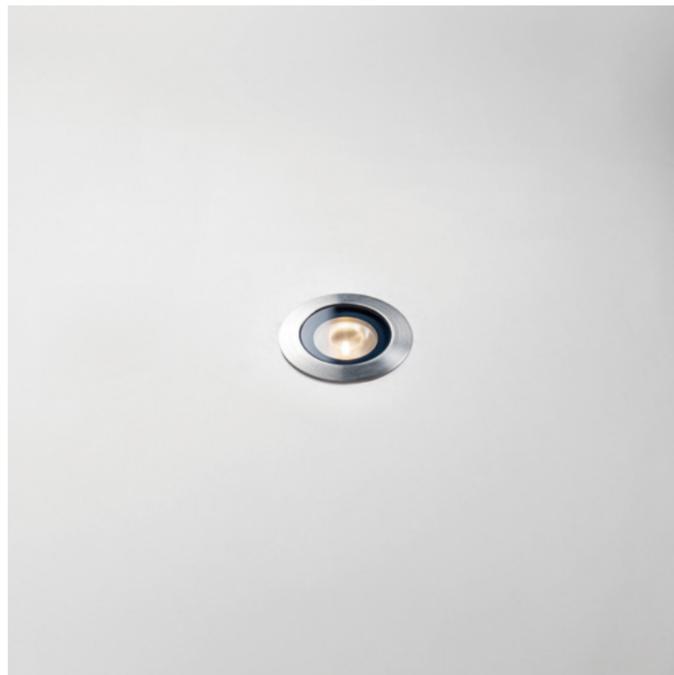

Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

Optic Óptica

- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF

Protection Protección

- IP68

Finishes Acabados

- Inox 316

Accessories Accesorios


- EX048
Preinstallation box
Caja de preinstalación

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm	Efficiency
X047.83000310.x	3W	10°	80	3000K	170Lm	57Lm/W

IP68 blocker

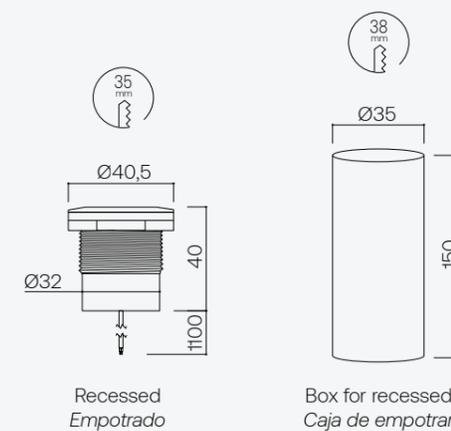

Wet M

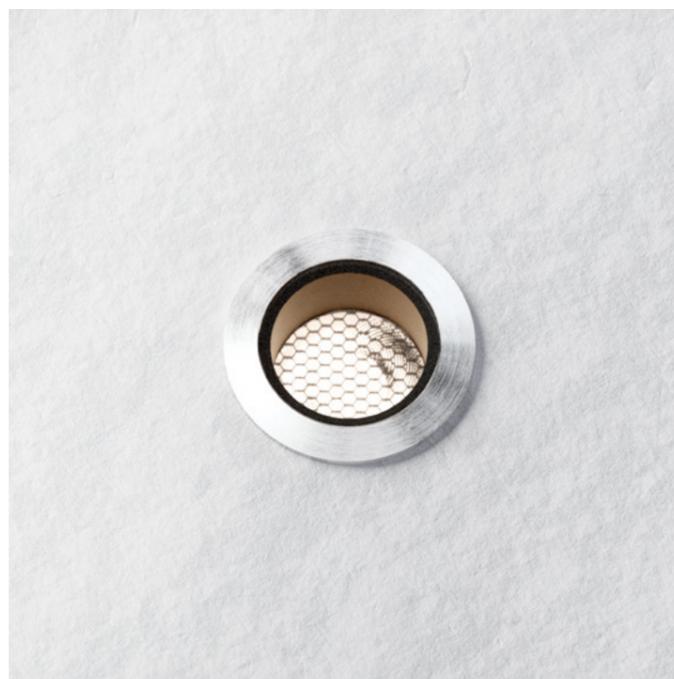

200 — Outdoor

Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB BRIDGELUX
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF

Protection Protección

- IP67

Finishes Acabados

- Inox 316

Accessories Accesorios

- Honeycomb (included)

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
X049.827007HC.x	7W	HC36°	80	2700K	320Lm	46Lm/W
X049.830007HC.x	7W	HC36°	80	3000K	340Lm	49Lm/W

IP68 blocker





Recessed
Empotrado



Box for recessed
Caja de empotrar

Wet L

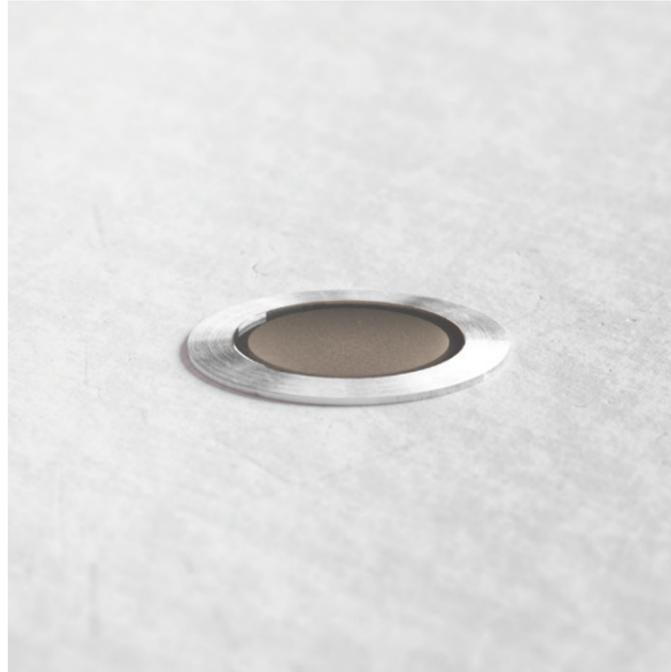

Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- COB BRIDGELUX
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF

Protection Protección

- IP67

Finishes Acabados

- Inox 316

Accessories Accesorios

- Honeycomb (included)

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
X054.827015HC.x	15,5W	HC36°	80	2700K	905Lm	59Lm/W
X054.830015HC.x	15,5W	HC36°	80	3000K	960Lm	62Lm/W

IP68 blocker




Recessed
Empotrado



Box for recessed
Caja de empotrar

Estanca



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

Optic Óptica

- Opal diffuser

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP65
- IK08
- -20 °C to +50 °C

Finishes Acabados

- White


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
X121.840035C0.x	40W	120°	80	4000K	4800lm	120Lm/W



Industrial Bay



Luminary

Luminária

- L70 > 50000h
- MacAdam 5

LED/Optic Óptica

- HP LED LUMILEDS
- Lens

Driver

- Integrated - *Integrado*

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP65


Finishes Acabados

- Black


Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm	Efficiency
S150.840130C0.x	150W	120°	80	4000K	22500Lm	150Lm/W

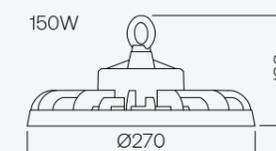

Slc Spotless IP67

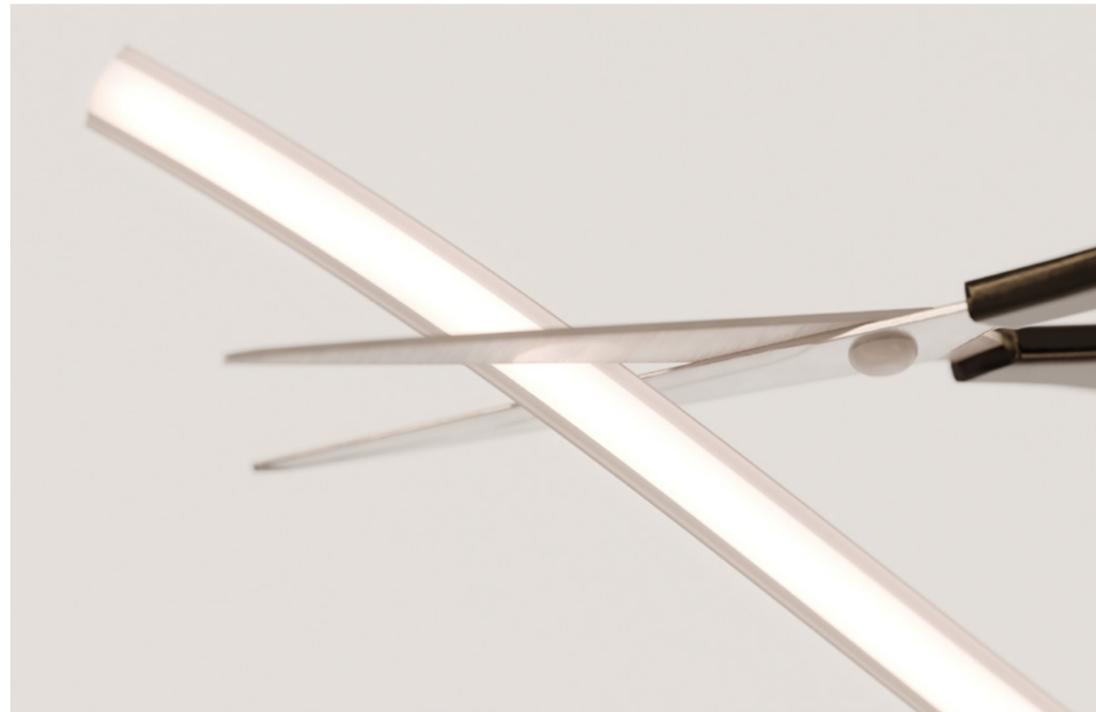

Discover our revolutionary LED strip that you can cut at any position, even 45 degrees, without losing brightness. Each segment functions independently, ensuring consistent brightness without shadows. Ideal for precise applications, it offers seamless installation and energy efficiency.

Descubre nuestra revolucionaria tira LED, que puedes cortar en cualquier posición, incluso a 45 grados, sin perder brillo. Cada segmento funciona de manera independiente, garantizando una iluminación uniforme sin sombras. Ideal para aplicaciones precisas, ofrece una instalación sin interrupciones y una alta eficiencia energética.




It is not necessary to use a aluminium profile, you can install it directly on the surface of your choice.



No es necesario utilizar un perfil de aluminio, puedes instalarlo directamente sobre la superficie de tu elección.

Slc Spotless IP67

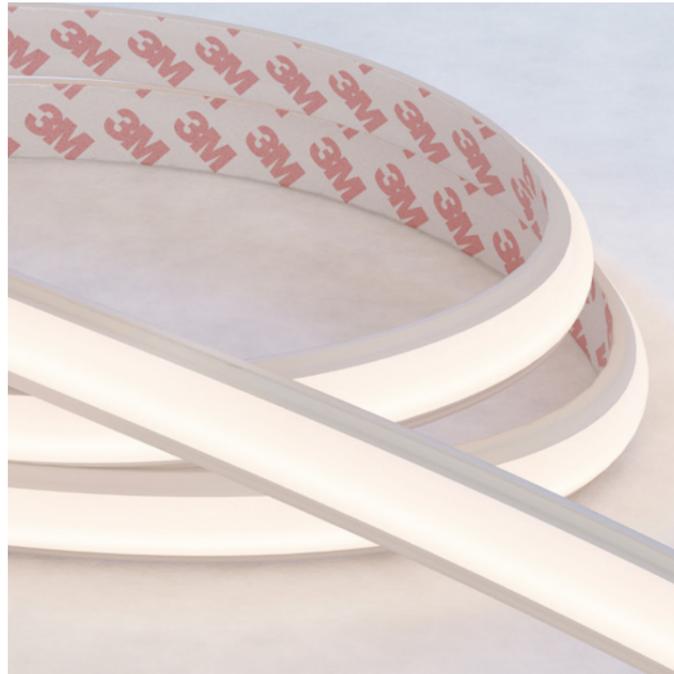

No profile required, easy installation.
No requiere perfil, fácil instalación.

Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3

LED/Optic Óptica

- Opal diffuser

Driver

- Not included - *No incluido*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección

- IP67

Accessories Accesorios

- Quick connector



- Transparent clip




Downloads Descargas



Cod.	W/m	Beam angle	CRI	K	Lm/m	Efficiency
SLC2767	12W/m	180°	90	2700K	780Lm/m	65Lm/W
SLC3067	12W/m	180°	90	3000K	825Lm/m	69Lm/W



Slg High Efficiency IP20

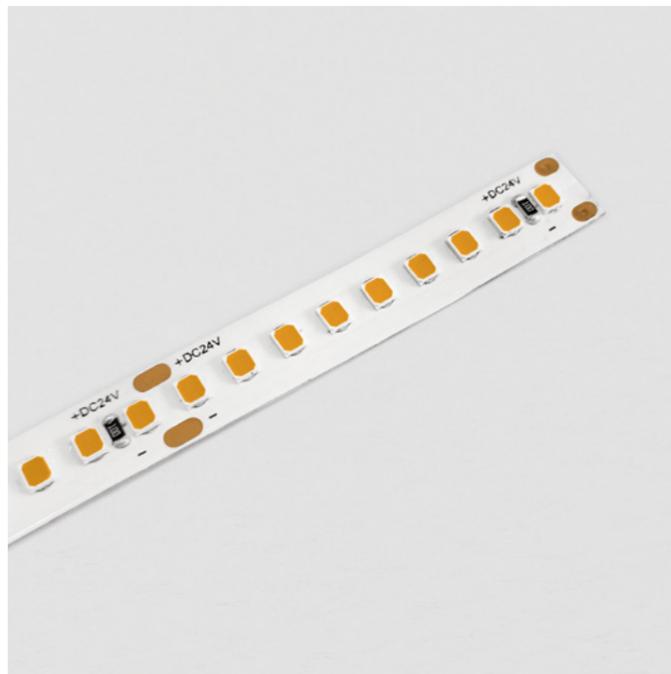

Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - 180 LED/m

Driver

- Not included - *No incluido*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF
- PH-CUT
- 1-10V
- PUSH ONLY
- DALI-2

Protection Protección



- IP20

Downloads Descargas



Cod.	W/m	Beam angle	CRI	K	Lm/m	Efficiency
SLG2720	8W/m	180°	90	2700K	1515Lm/m	190Lm/W
SLG3020	8W/m	180°	90	3000K	1520Lm/m	190Lm/W

Recommended profile Perfil recomendado

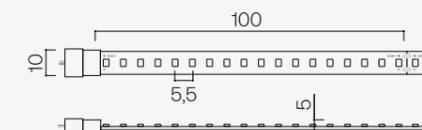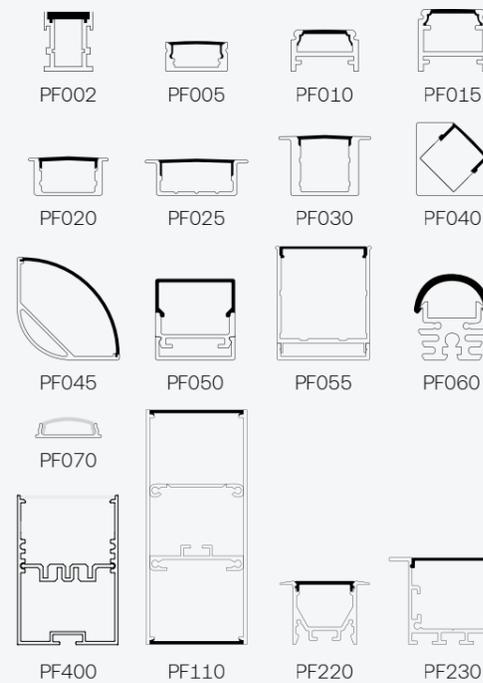

Sla Neon IP67



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- 120 LED/m
- SMD 315

Driver

- Not included - *No incluido*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF
- DALI
- PUSH
- PH-CUT

Protection Protección

- IP67

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm
SLA2767	9,6W	120°	90	2700K	335Lm/m
SLA3067	9,6W	120°	90	3000K	350Lm/m
SLA4067	9,6W	120°	90	4000K	385Lm/m

Accessories Accesorios


SLAAG

End cap with hole
Tapa con agujero




SLAEC

End cap
Tapa final



SLNSP

Bracket
Soporte

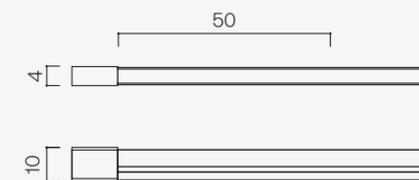

SlN Neon IP67



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - 120 LED/m
 - SMD 2835

Driver

- Not included - *No incluido*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF
- DALI
- PUSH
- PH-CUT

Protection Protección

- IP67

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm
SLN2767	12W	120°	90	2700K	420Lm/m
SLN3067	12W	120°	90	3000K	435Lm/m
SLN4067	12W	120°	90	4000K	480Lm/m

Accessories Accesorios


SLNAG

End cap with hole
Tapa con agujero




SLNEC

End cap
Tapa final



SLNSP

Bracket
Soporte

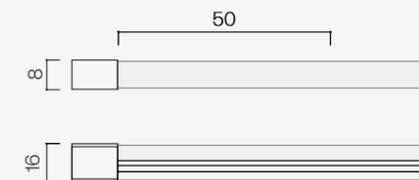

Sle Neon IP65



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- 360 LED/m

Driver

- Not included - *No incluido*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF
- DALI
- PUSH
- PH-CUT

Protection Protección

- IP65

Downloads Descargas




Cod.	W	Beam angle	CRI	K	Lm
SLE2765	11W	360°	70	2700K	720Lm/m
SLE3065	11W	360°	70	3000K	750Lm/m
SLE4065	11W	360°	70	4000K	770Lm/m

Accessories Accesorios


SLECX

Connector
Conector



SLNCL

Clip



Slid IP20



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- 120 LED/m
- SMD 2835

Driver

- Not included - *No incluido*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF
- DALI
- PUSH
- PH-CUT

Protection Protección



- IP20

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm
SLD204020	9,6W	120°	90	2000K-4000K	330Lm-500Lm/m

Recommended profile Perfil recomendado

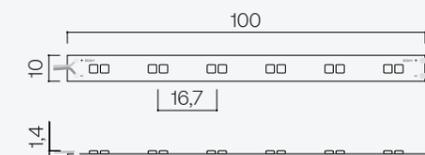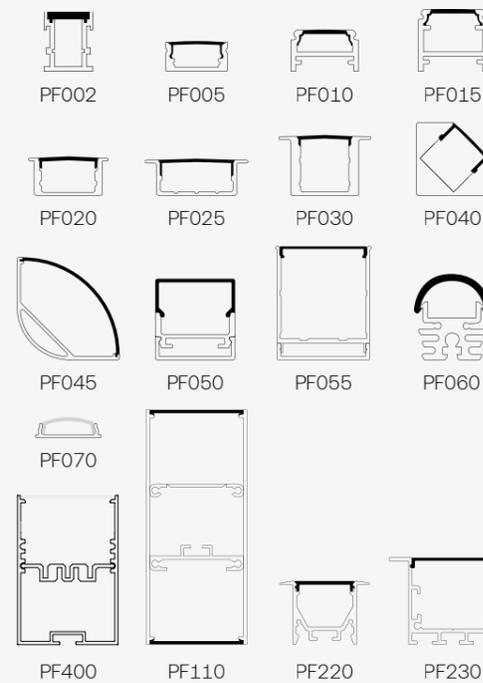

Slr RGB IP20



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- 60 LED/m
- SMD 5050

Driver

- Not included - *No incluido*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF
- DALI
- PUSH
- PH-CUT

Protection Protección



- IP20

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm
SLR0003	14,4W	120°	-	RGB	-
SLR0011	19,2W	120°	90	RGB+2700K	-

Recommended profile Perfil recomendado

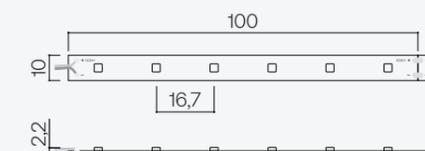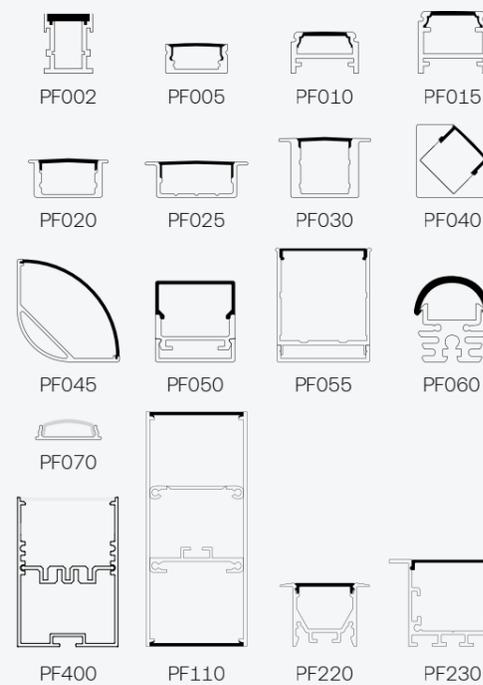

SLr RGB IP62



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- 60 LED/m
- SMD 5050

Driver

- Not included - *No incluido*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF
- DALI
- PUSH
- PH-CUT

Protection Protección



- IP62

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm
SLR0002	14,4W	120°	-	RGB	-

Recommended profile Perfil recomendado

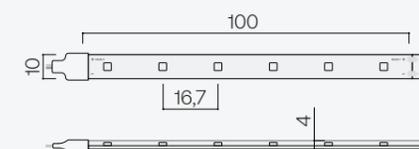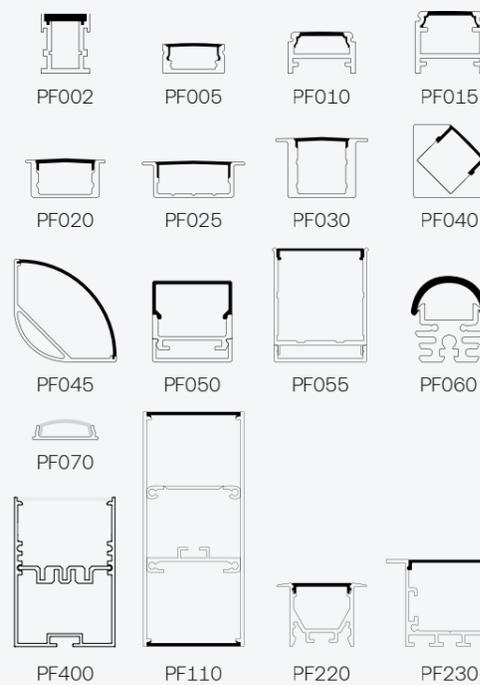

SLr RGB IP68



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- 60 LED/m
- SMD 5050

Driver

- Not included - *No incluido*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF
- DALI
- PUSH
- PH-CUT

Protection Protección



- IP68

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm
SLR0008	14,4W	120°	-	RGB	-
SLR0012	19,2W	120°	90	RGB+2700K	-

Recommended profile Perfil recomendado

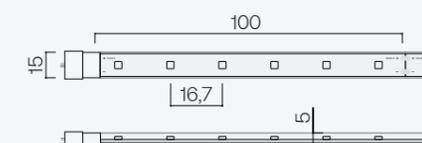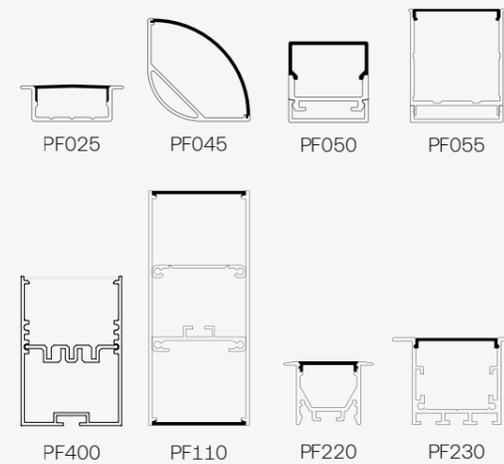

Slp IP20



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - 140 LED/m
 - SMD 2835

Cod.	W	Beam angle	CRI	K	Lm
SLP2220*	9,6W	120°	90	2200K	965Lm/m
SLP2720	9,6W	120°	90	2700K	1080Lm/m
SLP3020	9,6W	120°	90	3000K	1115Lm/m
SLP4020	9,6W	120°	90	4000K	1150Lm/m

*Consult availability *Consultar disponibilidad*

Driver

- Not included - *No incluido*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF
- DALI
- PUSH
- PH-CUT



Protection Protección

- IP20

Downloads Descargas



Recommended profile Perfil recomendado

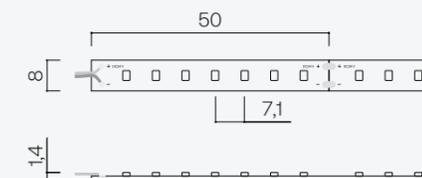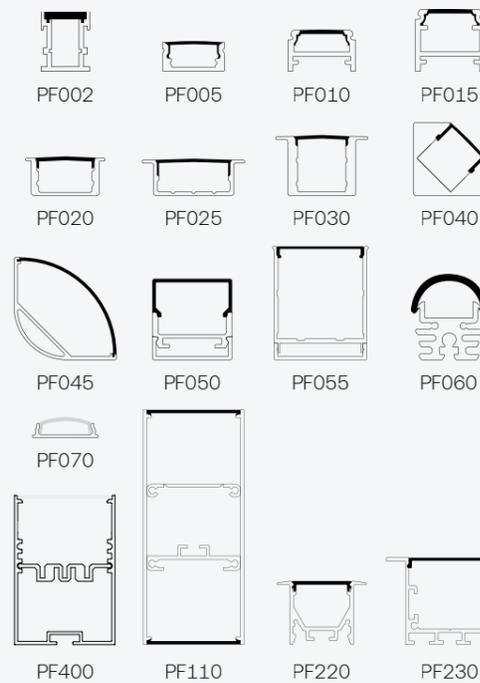

Slp IP62



Luminary

Luminária

- L70 > 50000h
- MacAdam 3
- 140 LED/m
- SMD 2835

Driver

- Not included - *No incluido*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF
- DALI
- PUSH
- PH-CUT

Protection Protección

- IP62



Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm
SLP2262*	9,6W	120°	90	2200K	945Lm/m
SLP2762	9,6W	120°	90	2700K	1030Lm/m
SLP3062	9,6W	120°	90	3000K	1060Lm/m
SLP4062	9,6W	120°	90	4000K	1140Lm/m

*Consult availability *Consultar disponibilidad*

Recommended profile Perfil recomendado

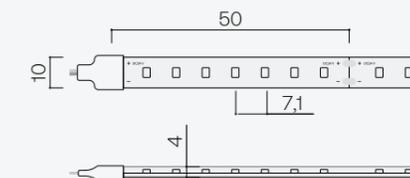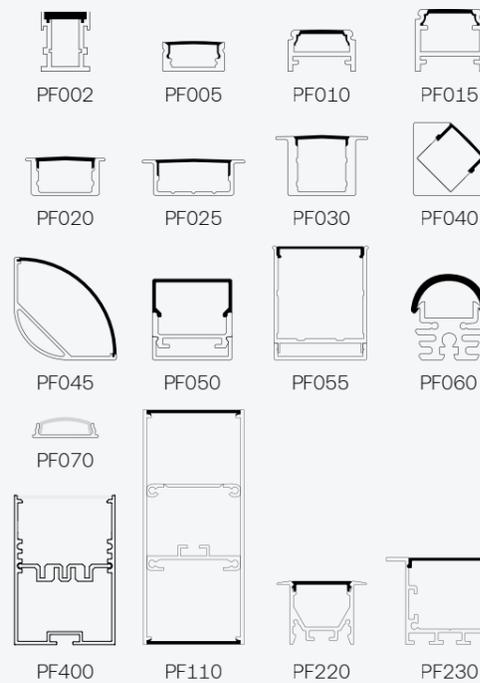

Slp IP68



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - 140 LED/m
 - SMD 2835

Driver

- Not included - *No incluido*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF
- DALI
- PUSH
- PH-CUT

Protection Protección



- IP68

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm
SLP2768	9,6W	120°	90	2700K	915Lm/m
SLP3068	9,6W	120°	90	3000K	950Lm/m
SLP4068	9,6W	120°	90	4000K	980Lm/m

Recommended profile Perfil recomendado

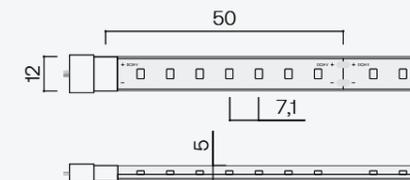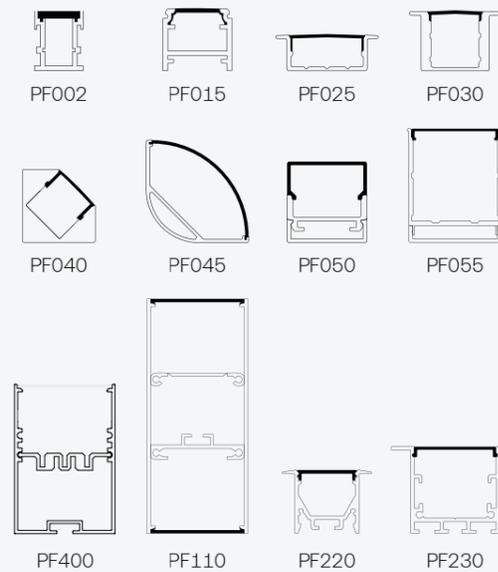

SIs IP20



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - 210 LED/m
 - SMD 2835

Cod.	W	Beam angle	CRI	K	Lm
SLS2220*	14,4W	120°	90	2200K	1270Lm/m
SLS2720	14,4W	120°	90	2700K	1630Lm/m
SLS3020	14,4W	120°	90	3000K	1680Lm/m
SLS4020	14,4W	120°	90	4000K	1740Lm/m

*Consult availability *Consultar disponibilidad*

Driver

- Not included - *No incluido*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF
- DALI
- PUSH
- PH-CUT



Protection Protección

- IP20

Downloads Descargas



Recommended profile Perfil recomendado

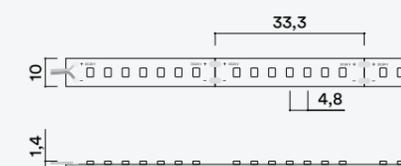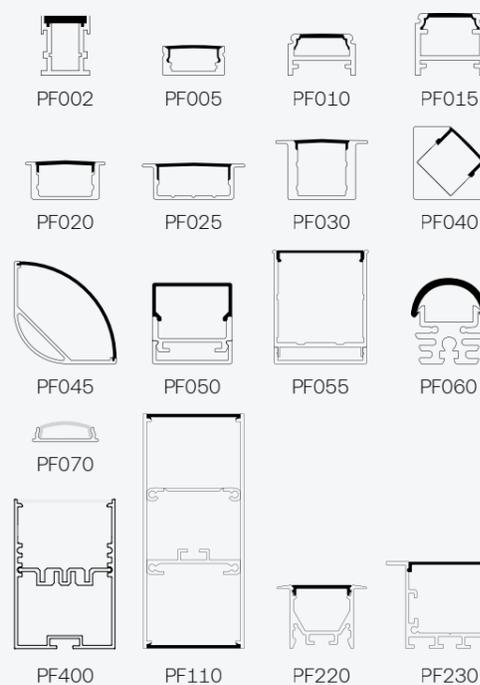

SIs IP62



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - 210 LED/m
 - SMD 2835

Cod.	W	Beam angle	CRI	K	Lm
SLS2262*	14,4W	120°	90	2200K	900Lm/m
SLS2762	14,4W	120°	90	2700K	1250Lm/m
SLS3062	14,4W	120°	90	3000K	1400Lm/m
SLS4062	14,4W	120°	90	4000K	1480Lm/m

*Consult availability *Consultar disponibilidad*

Driver

- Not included - *No incluido*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF
- DALI
- PUSH
- PH-CUT



Protection Protección

- IP62

Downloads Descargas



Recommended profile Perfil recomendado

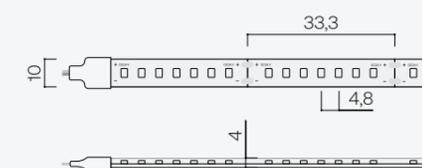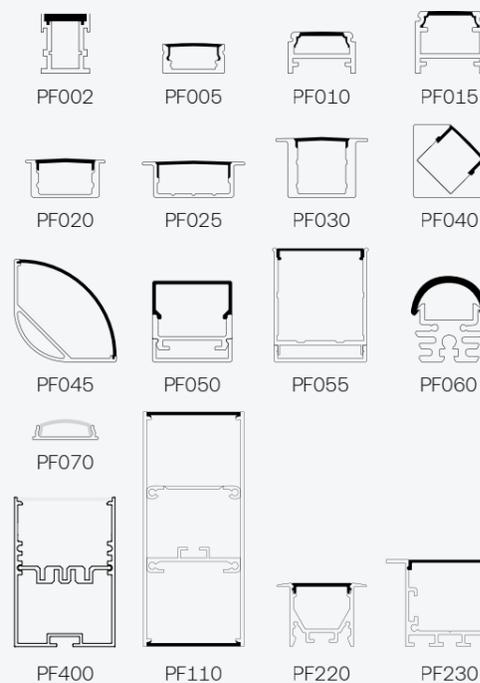

SIs IP68



Luminary

- Luminária**
- L70 > 50000h
 - MacAdam 3
 - 210 LED/m
 - SMD 2835

Driver

- Not included - *No incluido*

Voltage Voltaje

- 24VDC

Dimming Regulación

- ON-OFF
- DALI
- PUSH
- PH-CUT

Protection Protección



- IP68

Downloads Descargas



Cod.	W	Beam angle	CRI	K	Lm
SLS2768	14,4W	120°	90	2700K	1250Lm/m
SLS3068	14,4W	120°	90	3000K	1400Lm/m
SLS4068	14,4W	120°	90	4000K	1480Lm/m


Recommended profile Perfil recomendado

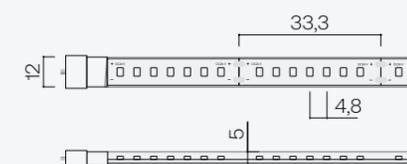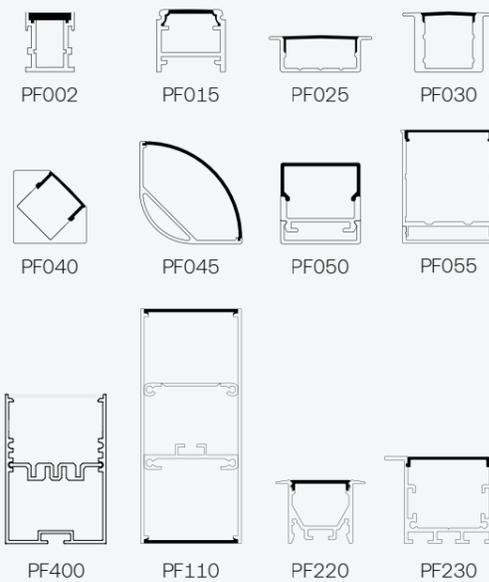

Pf005



Finishes
Acabados
 ● Grey
 ○ White



Accessories
Accesorios

PF006
 Opal diffuser
 Difusor opal



PF023
 Bracket profile
 Soporte perfil




PF007
 Transparent diffuser
 Difusor transparente



PF024
 Tilting bracket
 Soporte basculante




PF008/PF009
 End cap with/ without hole
 Tapa final con/sin agujero



Pf010



Finishes
Acabados
 ● Grey
 ○ White



Accessories
Accesorios


PF011
 Opal diffuser
 Difusor opal



PF014
 Bracket profile
 Soporte perfil



PF012
 Transparent diffuser
 Difusor transparente



PF024
 Tilting bracket
 Soporte basculante




PF013
 End cap
 Tapa final



Pf015



- Finishes**
Acabados
 ● Grey
 ○ White
 ● Black




Accessories
Accesorios

PF011
 Opal diffuser
 Difusor opal



PF012
 Transparent diffuser
 Difusor transparente




PF013
 End cap
 Tapa final




PF014
 Bracket profile
 Soporte perfil



Pf020

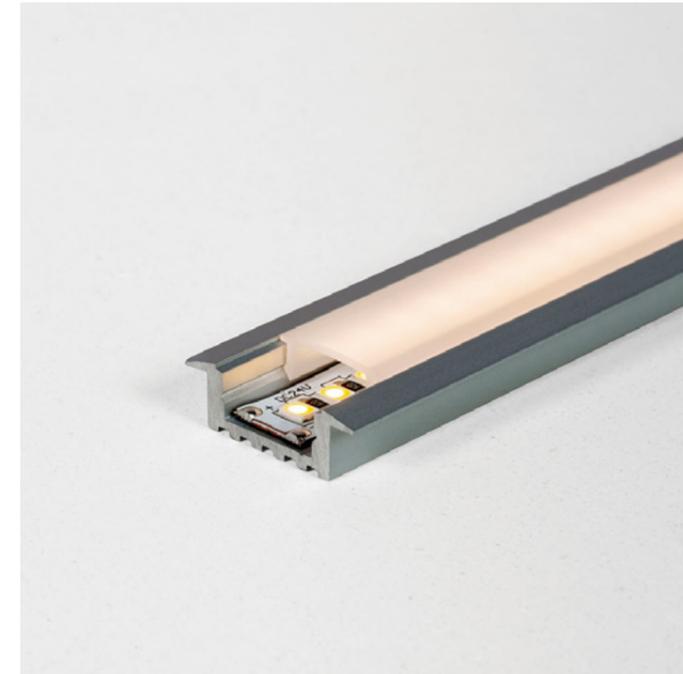

- Finishes**
Acabados
 ● Grey



Accessories
Accesorios

PF004
 Glazed diffuser
 Difusor glaseado



PF044
 Transparent diffuser
 Difusor transparente



PF021/PF022
 End cap with/ without hole
 Tapa final con/sin agujero




PF023
 Bracket profile
 Soporte perfil



Pf025



Finishes
Acabados
● Grey



Accessories
Accesorios


INCLUDED INCLUIDO
Opal diffuser
Difusor opal




PF026/ PF027
End cap with/without hole
Tapa final con/sin agujero



Pf030

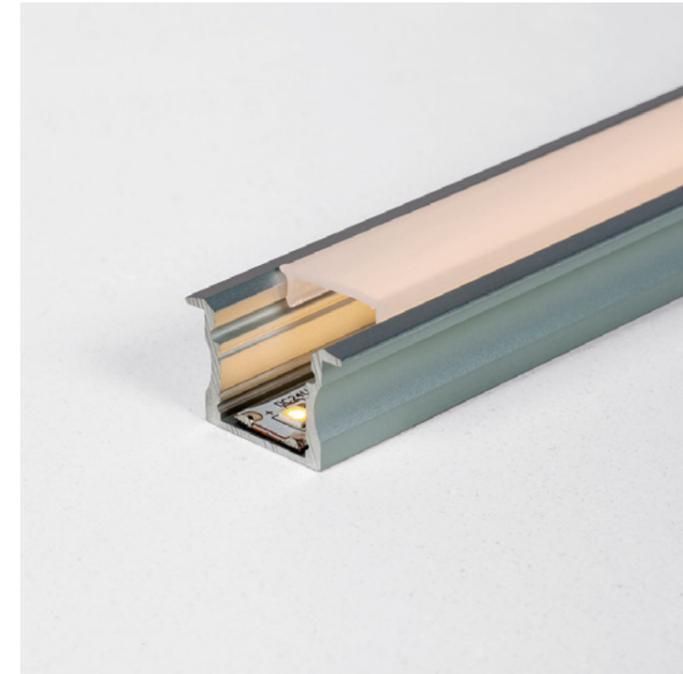

Finishes
Acabados
● Grey
● Black



Accessories
Accesorios

PF006
Glazed diffuser
Difusor glaseado



PF007
Transparent diffuser
Difusor transparente



PF023
Bracket profile
Soporte perfil




PF031/ PF032
End cap with/without hole
Tapa final con/sin agujero



Pf040



Finishes
Acabados
● Grey



Accessories
Accesorios

PF004
Glazed diffuser
Difusor glaseado



PF044
Transparent diffuser
Difusor transparente



PF041/PF042
End cap with/without hole
Tapa final con/sin agujero




PF043
Bracket profile
Soporte perfil



Pf045



Finishes
Acabados
● Grey



Accessories
Accesorios


INCLUIDO
Opal diffuser
Difusor opal



PF046/PF047
End cap with/without hole
Tapa final con/sin agujero




PF048
Bracket profile
Soporte perfil



Pf050



Finishes
Acabados
● Grey




Accessories
Accesorios


INCLUIDO
Opal diffuser
Difusor opal




PF051/ PF052
End cap with/without hole
Tapa final con/sin agujero



Pf055

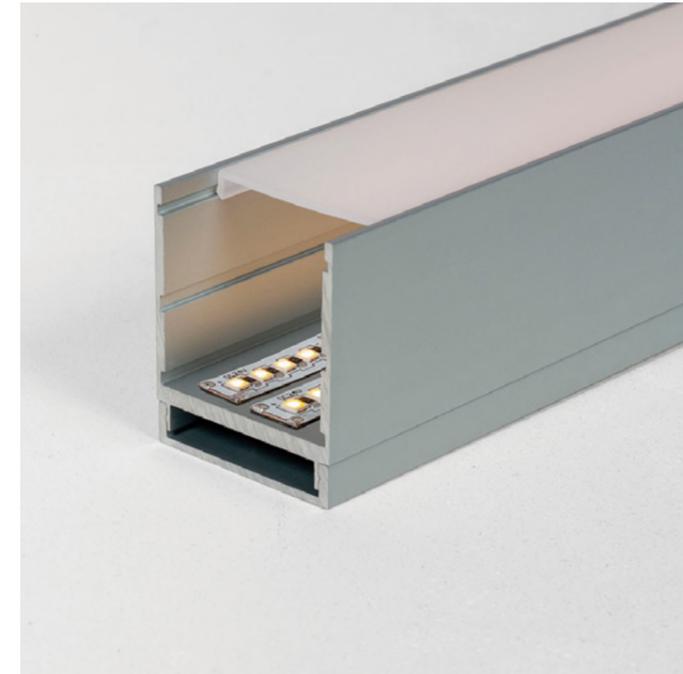

Finishes
Acabados
● Grey




Accessories
Accesorios


PF058
Opal diffuser
Difusor opal




PF056/ PF057
End cap with/without hole
Tapa final con/sin agujero



Pf060

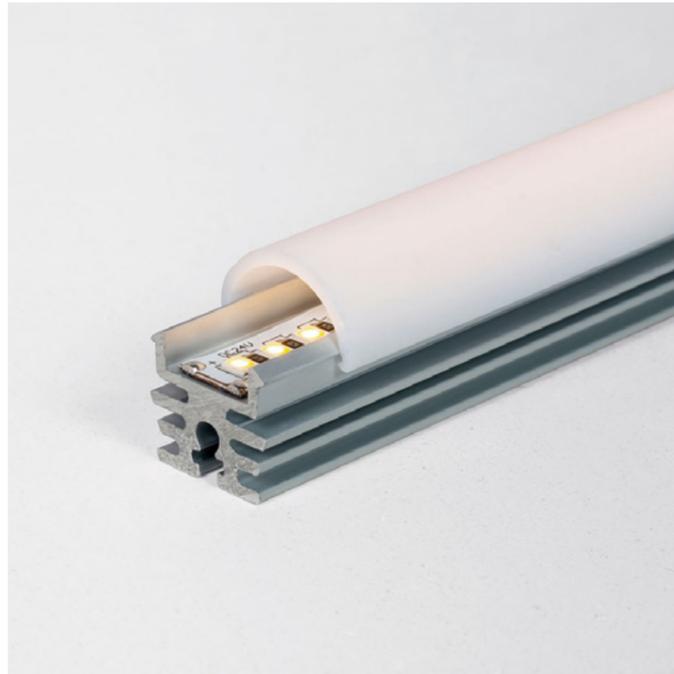

Finishes
Acabados
● Grey




Accessories
Accesorios

INCLUIDO
Opal diffuser
Difusor opal



PF061/ PF062
End cap with/without hole
Tapa final con/sin agujero




PF063
Bracket profile
Soporte perfil



Pf070



Finishes
Acabados
● Grey



Slim aluminium led profile bendable
Perfil fino de aluminio flexible

Accessories
Accesorios

INCLUIDO
Opal diffuser
Difusor opal




PF072/ PF073
End cap with/without hole
Tapa final con/sin agujero




PF074
Bracket profile
Soporte perfil



Pf400

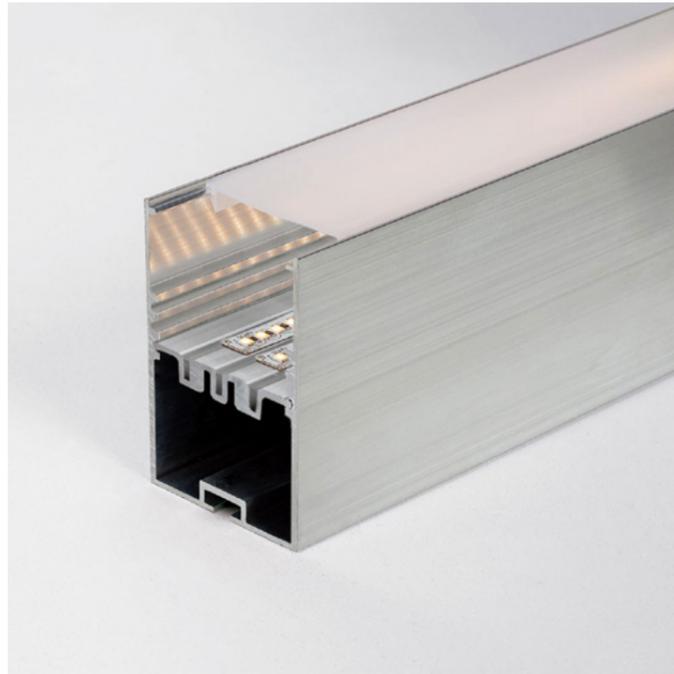


- Finishes**
Acabados
 ● Raw
 ○ White
 ● Black

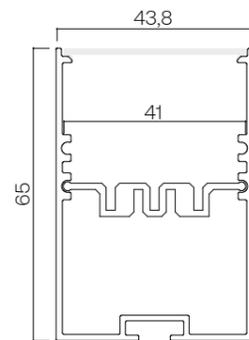

Accessories
Accesorios

ACC0200
 Welded End cap
 Tapa final soldada



PF103/04
aluminium
 ● Black Blind cover
 Tapa ciega negro



PF102
 High impact frosted diffuser
 Difusor glaseado alto impacto



PF103/01
aluminium
 ● White Blind cover
 Tapa ciega blanca




PF101
 Opal diffuser
 Difusor opal




PF104
polycarbonate
 Blind cover
 Tapa ciega



Pf002

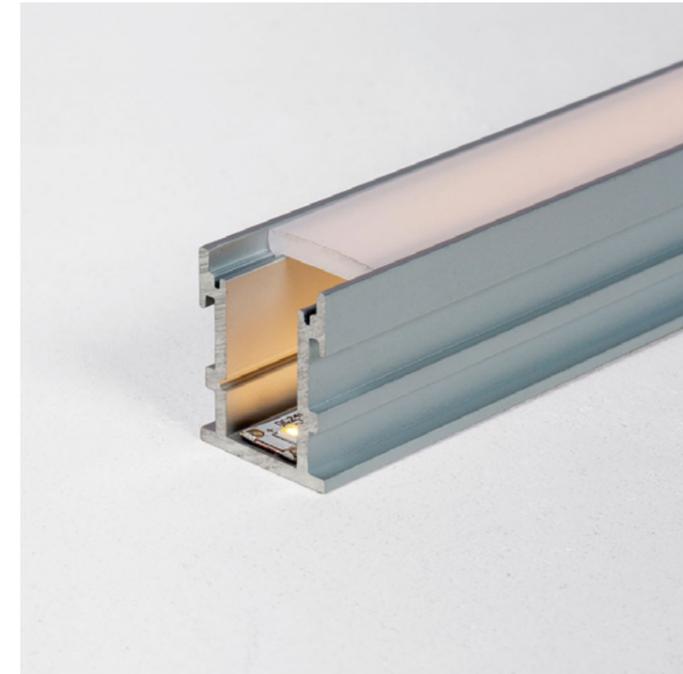

- Finishes**
Acabados
 ● Grey



Accessories
Accesorios

INCLUIDO
 Opal diffuser
 Difusor opal



PF003AG/PF003S
 End cap with/without hole
 Tapa final con/sin agujero



Pf110



Finishes

Acabados

- Raw

H profile in raw aluminum
Perfil H en aluminio bruto

Accessories
Accesorios

PF101

Opal diffuser
Difusor opal




PF102

High impact
frosted diffuser
Difusor glaseado
alto impacto



ACC0210

Welded End cap
Tapa final soldada

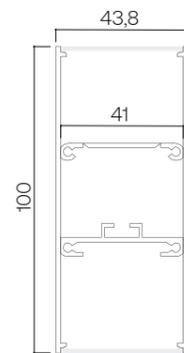

Pf220



Finishes

Acabados

- White

Accessories
Accesorios

INCLUIDO

Opal diffuser
Difusor opal




PF221

End cap
Tapa final



PF222

Mounting Clip
Clip montaje

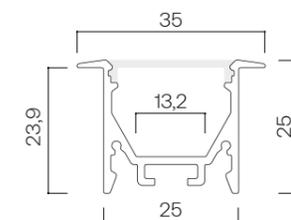


Pf230



Finishes

Acabados

○ White

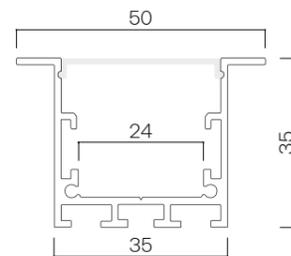

Accessories

Accesorios

PF233 (INCLUDED - INCLUIDO)

Opal diffuser

Difusor opal



PF232

Mounting Clip

Clip montaje



PF231

End cap

Tapa final



HER

C/ Arquitecte Moragas, 20-22
08820 El Prat de Llobregat
Barcelona
+34 933 741 663
hello@herlighting.com

Showroom
Av. Josep Tarradellas 51-53
08029 Barcelona

